

State of California
California Environmental Protection Agency
AIR RESOURCES BOARD

APPENDICES

for the

**Report on Air Monitoring
Around a Bed Fumigation Application
of Chloropicrin
Fall 2003**

Operations Planning and Assessment Section
Quality Management Branch
Monitoring and Laboratory Division

Project No. P-03-001

November 24, 2004

Report on Air Monitoring
Around a Bed Fumigation Application
of Chloropicrin - Fall 2003

APPENDICES

I.	MONITORING PROTOCOL.....	1
	Attachment I, Quality Assurance Plan for Pesticide Air Monitoring	10
	Appendix I, Sample Field Log Sheet	28
	Appendix II, Chain of Custody Form.....	30
	Appendix III, Analytical Standard Operating Procedure Format	32
	Appendix IV, Application Checklist	36
	Appendix V, Flow Controller Calibration Form.....	38
	Attachment II, Standard Operating Procedure, Sampling and Analysis of Trichloronitromethane (Chloropicrin in Application and Ambient Air using Gas Chromatography/Mass Selective Detector.....	40
	Attachment III, Application Sampling Procedures For Adsorbent Tubes ..	46
	Attachment IV, Field Log Sheet.....	49
	Attachment V, Chloropicrin and Methyl Bromide "Information Profiles"	51
	Attachment VI, Memorandum "Protocol Changes for Chloropicrin Application-site Monitoring"	60
II.	LABORATORY REPORT.....	63
III.	NOTICE OF INTENT TO APPLY RESTRICTED MATERIALS	74
IV.	CHLOROPICRIN APPLICATION METEOROLOGICAL DATA.....	78
V.	APPLICATION FIELD LOG SHEETS	98
VI.	METHOD VALIDATION DATA.....	102
VII.	STANDARD OPERATING PROCEDURE – CHLOROPICRIN SAMPLING AND ANALYSIS	106

APPENDIX I
MONITORING PROTOCOL


State of California
California Environmental Protection Agency
AIR RESOURCES BOARD

**Protocol for Air Monitoring
Around a Bed Fumigation Application
of Chloropicrin
Fall 2003**

Prepared by
Operations Planning and Assessment Section
Quality Management Branch
Monitoring and Laboratory Division

Date: November 3, 2003

APPROVED:



Jeffrey R. Cook, Chief
Quality Management Branch



Kenneth R. Stroud, Chief
Air Quality Surveillance Branch



Michael W. Poore, Chief
Northern Laboratory Branch



William V. Loscutoff, Chief
Monitoring and Laboratory Division

This protocol has been reviewed by the staff of the California Air Resources Board and approved for publication. Approval does not signify that the contents necessarily reflect the views and policies of the Air Resources Board, nor does mention of trade names or commercial products constitute endorsement or recommendation for use.

TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION.....	1
II. SAMPLING	1
III. ANALYSIS	3
IV. FIELD QUALITY ASSURANCE	4
V. SAMPLE LABELLING	4
VI. PERSONEL	5
VII. SAFETY RECOMMENDATIONS	5

LIST OF FIGURES

1. MANIFOLD SAMPLER.....	7
--------------------------	---

LIST OF TABLES

1. APPLICATION SAMPLING SCHEDULE.....	2
2. APPLICATION INFORMATION	3

ATTACHMENTS

I. QUALITY ASSURANCE PLAN FOR PESTICIDE AIR MONITORING.....	8
II. LAB SOP FOR CHLOROPICRIN	38
III. APPLICATION SAMPLING PROCEDURES FOR ADSORBENT TUBES ...	44
IV. FIELD LOG SHEET.....	47
V. CHLOROPICRIN AND METHYL BROMIDE "INFORMATION PROFILES" .	49
IV. "PROTOCOL CHANGES" MEMORANDUM	58

**Protocol for Air Monitoring
Around a Bed Fumigation Application
of Chloropicrin
Fall 2003**

I. Introduction

At the request of the California Department of Pesticide Regulation (DPR) (October 18, 2002 Memorandum, Helliker to Lloyd), the Air Resources Board (ARB) staff will determine airborne concentrations of the pesticide chloropicrin around a bed fumigation application, tentatively scheduled to be conducted in Fall 2003. This monitoring will be done to fulfill the requirements of AB 1807/3219 (Food and Agricultural Code, Division 7, Chapter 3, Article 1.5) which requires the ARB "to document the level of airborne emissions...of pesticides which may be determined to pose a present or potential hazard..." when requested by the DPR. The DPR has requested that a chloropicrin application where methyl bromide is also being used be selected for the monitoring study. The DPR will collect samples for methyl bromide, which will be analyzed by the California Department of Food and Agriculture's pesticide laboratory. This protocol will only address the sampling for chloropicrin (i.e., will not address the DPR sampling/analysis for methyl bromide).

The sampling and analysis will follow the quality assurance guidelines described in Attachment I, "Quality Assurance Plan for Pesticide Air Monitoring" (May 11, 1999 version).

The sampling and analysis will follow the procedures outlined in this protocol as well as the procedures described in Attachment II, "Standard Operating Procedure, Sampling and Analysis of Trichloronitromethane (Chloropicrin) in Application and Ambient Air using Gas Chromatography/Mass Selective Detector".

II. Sampling

Chloropicrin samples will be collected on XAD-4 resin sampling cartridges. For chloropicrin, the tubes are 8 mm x 140 mm, XAD-4, with 400 mg in the primary section, and 200 mg in the secondary section (SKC special order). Sample collection is at a flow rate of 100 standard cubic centimeters per minute (sccpm). Subsequent to sampling, the tubes are capped, labeled, placed in a culture tube, and stored and transported in an insulated container with dry ice. The samples are transported (driven) to the ARB laboratory in Sacramento. DPR recommends a target 24-hour estimated quantitation limit (EQL) for chloropicrin of 0.1 ug/m³.

Caution should be used during field monitoring, transportation, storage, and lab analysis to minimize exposure of samples to sunlight in order to prevent photo degradation of chloropicrin.

Each sample train consists of an adsorbent tube, Teflon fittings and tubing, rain/sun shield, rotameter or needle valve, train support, and a 12 volt DC vacuum pump (see Figure 1). Each tube is prepared in the field by breaking off each sealed glass end and then immediately inserting the tube into the fitting. The tubes are oriented in the sample train with a small arrow printed on the side of each tube indicating the direction of flow. The flow rates will be set using a calibrated digital mass flow meter (MFM) before the start of each sampling period. The MFM used for the chloropicrin samplers has a range of 0-200 sccpm. The mass flow meter has been calibrated to standard conditions (1 atm and 25 °C). The flow rate is also checked and recorded, using the MFM, at the end of each sampling period. Any change in flow rates will be recorded in the field logbook (see Attachment IV). The pesticide sampling procedures for adsorbent tubes are included as Attachment III. The sampling schedule consists of samples collected during daylight and overnight periods as shown below in Table 1.

Table 1
Application Sampling Schedule

<u>Sample period begins</u>	<u>Sample duration</u>
Background (pre-application)	Two sequential 12-hour samples
During application and post –application	Start of application until 1 hour before sunset (or until end of application if after sunset)
1 hour before sunset	Overnight (until 1 hour after sunrise)
1 hour after sunrise	Daytime (until 1 hour before sunset)
1 hour before sunset	Overnight (until 1 hour after sunrise)
1 hour after sunrise	Daytime (until 1 hour before sunset)
1 hour before sunset	Overnight (until 1 hour after sunrise)

The application monitoring study will be conducted at the location and under the conditions described in Table 2.

Table 2
Application Information

Location:	To be Determined
Field Size:	Largest field that can be fumigated in 1 day
Product Applied:	50 to 60% methyl bromide, 40 to 50% chloropicrin (by weight)
Type of Application:	Bed tarpaulin fumigation
Commodity:	To be Determined
Application Rate:	Maximum label rate
Grower/Applicator:	To be Determined

DPR staff will coordinate the selection of the study site and the test dates with representatives of the Chloropicrin Manufacturers Task Force (CMTF) and will obtain permission from the grower (and any other land owners where samplers may be located). Chloropicrin/methyl bromide bed-tarpaulin applications typically proceed at a pace of about one acre per hour or about 10 acres per day per application rig.

A minimum of 8 samplers will be positioned, one on each side of the field and one at each corner. A 9th replicate sampler will be collocated at one position (downwind site). Samplers should be positioned at the required inner buffer distance. Site conditions will dictate the exact placement of samplers but no sampler will be positioned closer than the inner buffer distance. Sampler positions for this study differ from earlier bed fumigation application monitoring studies for reasons noted in the memorandum (Sanders to Cook, October 31, 2003) included as Attachment VI.

In regard to field data, the monitoring report will include: 1) a record of the positions of the monitoring equipment with respect to the field, 2) the application start location, 3) the direction of crop rows 4) how the field was divided to treat if over several days, 4) a drawing of the monitoring sites showing the precise location of the meteorological equipment, trees, buildings and other obstacles, 5) meteorological data collected at a minimum of 15-minute intervals including wind speed and direction, humidity, and air temperature and comments regarding degree of cloud cover, 6) the elevation of each sampling station with respect to the field, and the orientation of the field with respect to North (identified as either true or magnetic North), and 7) the start and end time of the application. In addition, the materials and procedures used to tarp the field will be documented.

III. Analysis

The sampling and analysis method and validation results for the sampling and analysis of chloropicrin are included as Attachment II. The chloropicrin method will consist of sampling with XAD-4 resin cartridges along with GC analysis with mass selective detector. The method detection limit (MDL) and estimated quantitation limit (EQL) for chloropicrin are 3.96 ng/sample and 19.8 ng/sample, respectively. For a 24-hour

sample at 100 sccpm, the MDL and EQL would be 27.5 ng/m³ and 137 ng/m³, respectively. The DPR target EQL was 100 ng/m³. The analyses will be performed by the ARB laboratory in Sacramento.

IV. Field Quality Assurance

Field Quality Control for the application monitoring will include the following:

- 1) Four field spikes will be obtained by sampling ambient air at the application monitoring site for 24 hours. The field spikes will be obtained by sampling ambient air during the background monitoring (i.e., collocated with a background sample at the same environmental and experimental conditions). The spike levels for chloropicrin in the adsorbent tube samples have not yet been determined.
- 2) Four trip spikes will be prepared at the same level as the field spikes. The trip spikes will be labeled, recorded on the field log-sheet, and transported along with the field spikes and application samples.
- 3) Four lab spikes will be prepared at the same level as the field and trip spikes. The lab spikes will remain in the laboratory freezer and will be extracted and analyzed along with the field and trip spikes.
- 4) Collocated (replicate) samples will be taken for all sampling periods (except the background period) at one sampling location (downwind).
- 5) A trip blank will be obtained, labeled, recorded on the field log-sheet, and transported along with the field spikes and application samples.

V. Sample Labeling

Samples will be labeled using the following format:

Location-Chemical-Sampling Period-Type of Sample

Where (as an example):

Location is designated as north 1, 2 or 3 (N1, N2, N3), west (W), south 1, 2 or 3 (S1, S2, S3), and east (E). These designations can be revised as necessary depending on the configuration of the field.

Chemical is designated as C for chloropicrin.

Sampling period is designated as B (for background) or 1 through 6.

The type of sample is designated as S (sample), C (collocated), TB (trip blank), TS (trip spike), and FS (field spike).

Examples: S2-C-B-S (South2, Chloropicrin, background, sample)
S2-C-B-FS (South2, Chloropicrin, background, field spike)
S2-C-1-S (South2, Chloropicrin, sampling period 1, sample)
S2-C-1-C (South2, Chloropicrin, sampling period 1, collocated)

VI. Personnel

ARB sampling personnel will consist of staff from the Air Quality Surveillance Branch.

VII. Safety Recommendations

Refer to Attachment V for general information on and toxicology of chloropicrin and methyl bromide gas fumigants. The DPR's Monitoring Recommendations include the following safety recommendations for chloropicrin.

"The chloropicrin product labels warn that chloropicrin is a poisonous liquid and vapor and is readily identifiable by smell. Inhalation of vapors may be fatal and exposures to low concentrations of vapor will cause irritation of the eyes, nose, and throat. Exposure to high concentrations or for a prolonged period of time may cause painful irritation to the eyes or temporary blindness. Contact with the liquid will cause chemical burns to the skin or eyes and is harmful or fatal if swallowed.

The acceptable air concentration for persons exposed to chloropicrin is 0.1 ppm. If air concentrations exceed 0.1 ppm, an air purifying respirator must be worn. The highest concentrations of chloropicrin at 20 m from the field should not exceed 0.05 to 0.08 ppm. The label states that the applicator and other handlers must wear: loose fitting, long -sleeve shirt and long pants, shoes and socks, and full-face shield or safety glasses with brow and temple shields. Monitoring personnel should refer to the label of the product used and should use proper protective equipment to prevent exposure to the dust, vapors, or spray mist."

The DPR's Monitoring Recommendations include the following safety recommendations for methyl bromide.

"According to the product labels for methyl bromide, it is an extremely hazardous liquid and vapor under pressure. Inhalation may be fatal or cause serious acute illness or delayed lung or nervous system injury. Liquid or vapor may cause skin or eye injury. Methyl bromide vapor is odorless and non-irritating to skin and eyes during exposure and toxic levels may occur without warning or detection.

The acceptable air concentration for persons exposed to methyl bromide is 5

ppm, except for those in residential or commercial structures. A respirator is required if air concentrations exceed 5 ppm at any time. According to the label, proper protective equipment for applicators include loose fitting or well-ventilated long-sleeved shirts and long pants, shoes and socks, full-face shield or safety glasses with brow and temple shields. Monitoring personnel should refer to the label of the actual product used for further precautions. Methyl bromide concentrations at the buffer zone distance should not exceed 1 ppm at any time.”

MANIFOLD SAMPLER

01/29/02

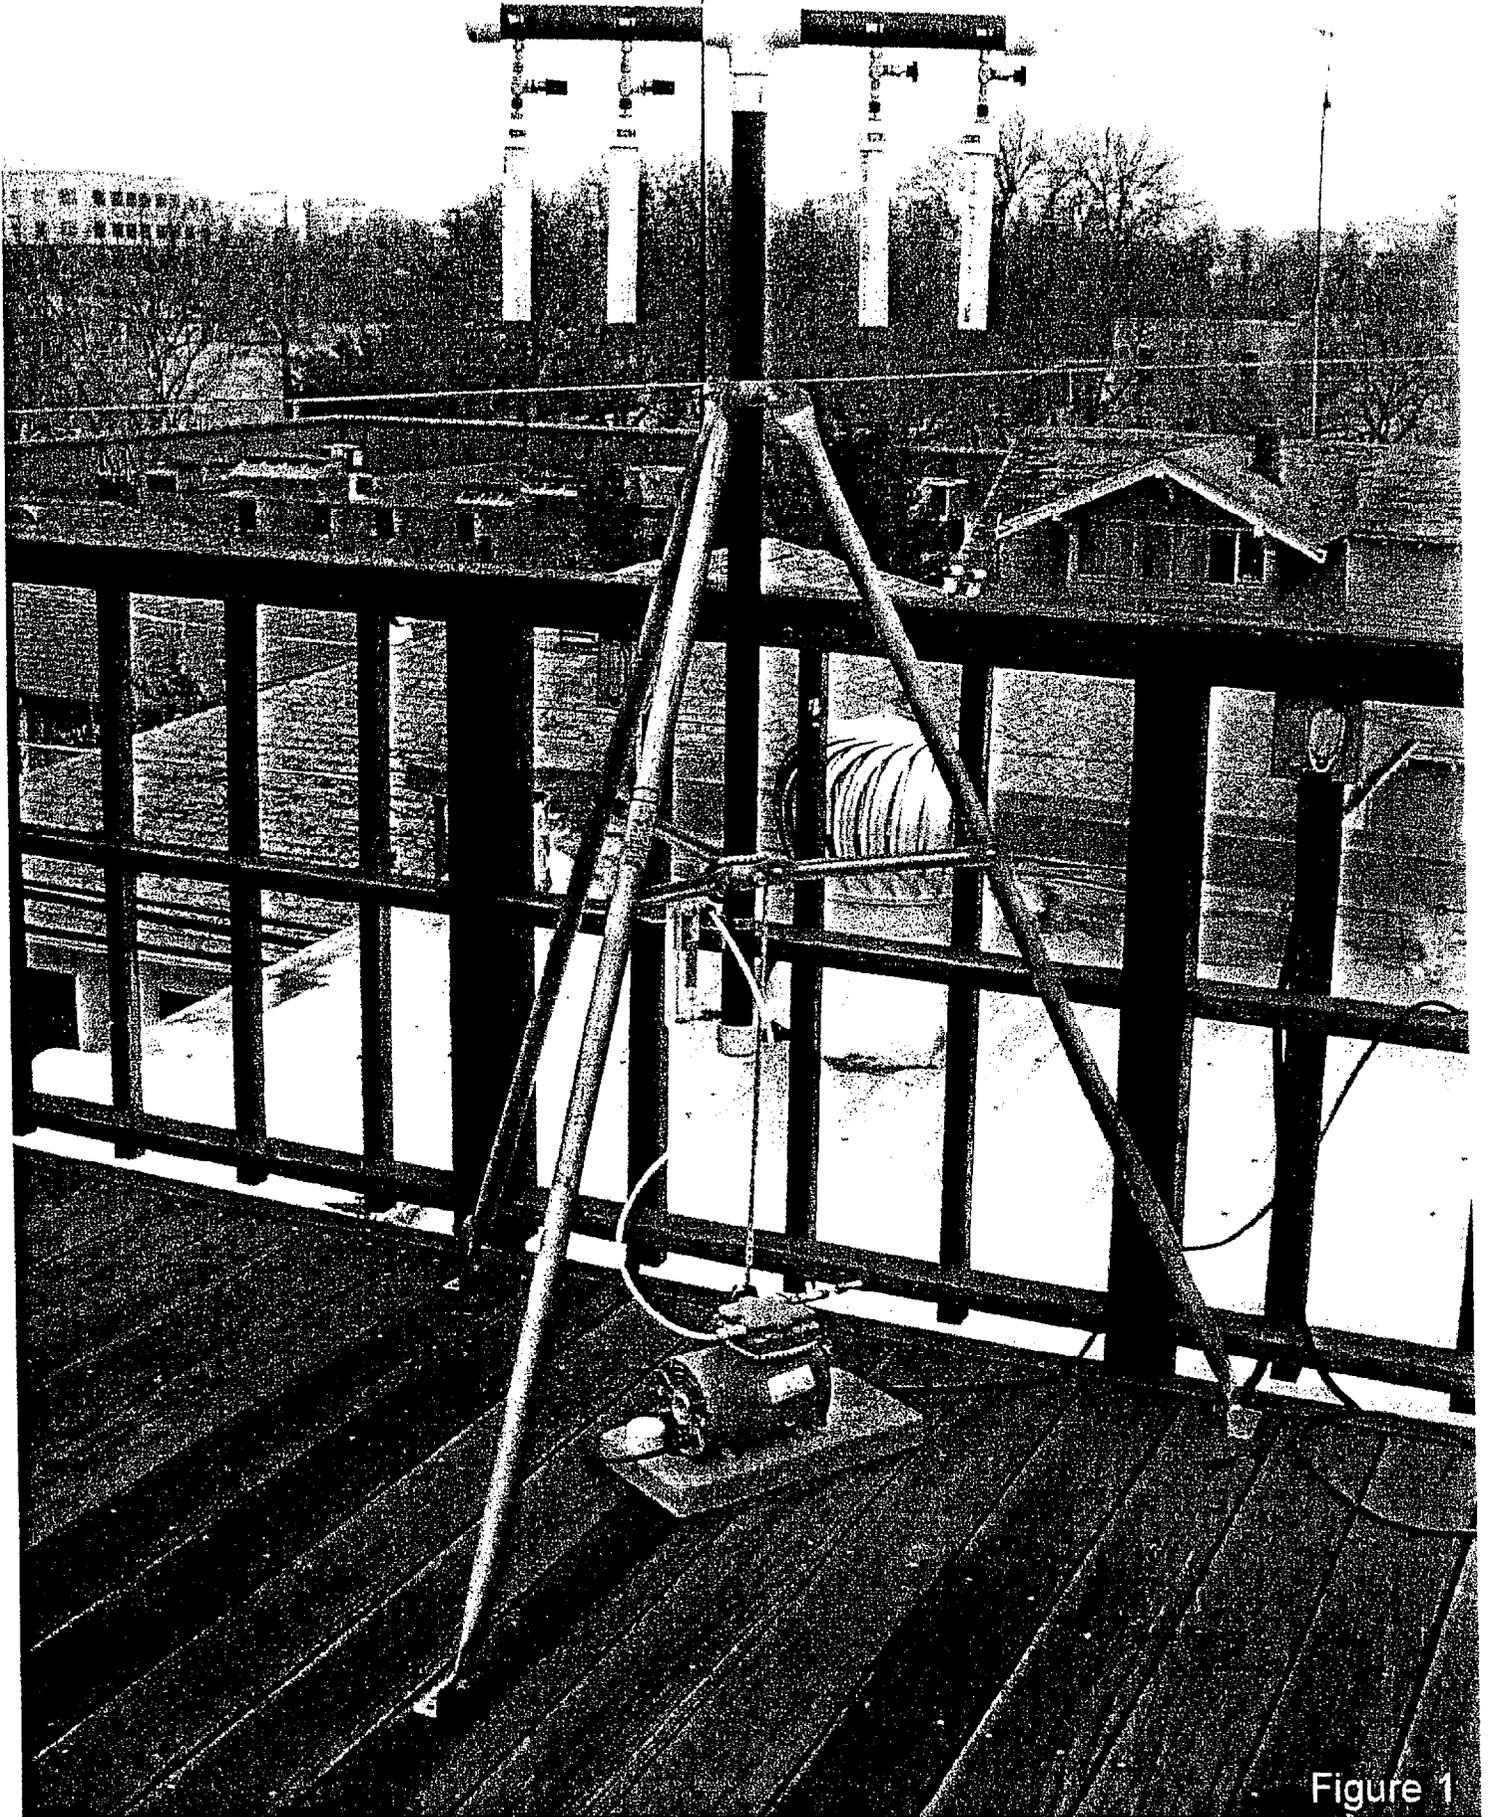


Figure 1

Attachment I

Quality Assurance Plan for Pesticide Air Monitoring

State of California
California Environmental Protection Agency
Air Resources Board


QUALITY ASSURANCE PLAN
FOR PESTICIDE AIR MONITORING

Prepared by the


Monitoring and Laboratory Division
Engineering and Laboratory Branch

Revised: May 11, 1999


APPROVED:


Kevin Mongar, Project Engineer
Testing Section


Bob Okamoto, Chemist
Evaluation Section

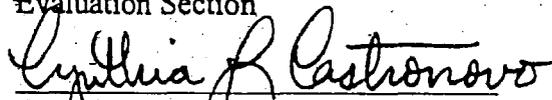
Cynthia L. Castronovo, Manager
Testing Section


Michael Spears, Manager
Evaluation Section


George Lee, Chief
Engineering and Laboratory Branch

This Quality Assurance Plan has been reviewed by the staff of the California Air Resources Board and approved for publication. Approval does not signify that the contents necessarily reflect the views and policies of the Air Resources Board, nor does mention of trade names or commercial products constitute endorsement or recommendation for use.

TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION	1
A. QUALITY ASSURANCE POLICY STATEMENT	1
B. QUALITY ASSURANCE OBJECTIVES	1
II. AIR MONITORING	1
A. SITING	2
B. SCHEDULE	3
C. METEOROLOGICAL MONITORING	4
III. METHOD VALIDATION	5
A. METHOD DETECTION LIMIT	5
B. REPRODUCIBILITY	5
C. ESTIMATED QUANTITATION LIMIT	5
D. EXTRACTION EFFICIENCY	5
E. SAMPLING EFFICIENCY	5
F. BREAKTHROUGH	5
G. FREEZER STORAGE STABILITY	6
IV. FIELD SAMPLING QUALITY CONTROL PROCEDURES	6
A. SAMPLE LABELS	6
B. LOG SHEETS	6
C. CHAIN OF CUSTODY FORMS	6
D. FLOW CONTROLLER CALIBRATION AND AUDIT	7
E. BACKGROUND SAMPLING	7

F.	COLLOCATED SAMPLES	7
G.	TRIP BLANKS	8
H.	LABORATORY, TRIP AND FIELD SPIKES	8
I.	TRANSPORTATION OF SAMPLES	8
J.	METEOROLOGICAL STATION CALIBRATION	9
K.	PREVENTATIVE MAINTENANCE	9
V.	ANALYSIS	9
VI.	ROUTINE ANALYTICAL QUALITY CONTROL PROCEDURES	9
A.	MASS SPECTROMETER TUNING	9
B.	CALIBRATION	10
C.	REAGENT BLANKS	10
D.	LABORATORY CONTROL BLANKS	10
E.	LABORATORY CONTROL SPIKES	11
F.	CALIBRATION CHECK SAMPLES	11
G.	DUPLICATE ANALYSES	11
H.	STANDARD-OPERATING PROCEDURES	11
VII.	SAMPLING AND ANALYSIS PROTOCOL	11
VIII.	FINAL REPORTS AND DATA REDUCTION	12
A.	AMBIENT REPORTS	12
B.	APPLICATION REPORTS	13
C.	QUALITY ASSURANCE	13

LIST OF TABLES

1.	TABLE 1. PESTICIDE MONITOR SITING CRITERIA SUMMARY	3
----	--	---

2. TABLE 2. GUIDELINES FOR APPLICATION SAMPLING SCHEDULE.....4

APPENDICES

I. SAMPLE FIELD LOG SHEET.....I-1

II. CHAIN OF CUSTODY FORM.....II-1

III. ANALYTICAL STANDARD OPERATING PROCEDURE FORMAT.....III-1

IV. APPLICATION CHECKLISTIV-1

V. FLOW CONTROLLER CALIBRATION FORMV-1

QUALITY ASSURANCE PLAN FOR PESTICIDE MONITORING

I. Introduction

At the request of the Department of Pesticide Regulation (DPR), the Air Resources Board (ARB) staff determines the airborne concentrations of specified pesticides following monitoring recommendations established by the DPR. This air monitoring is conducted to fulfill the requirements of AB 1807/3219 (Food and Agricultural Code, Division 7, Chapter 3, Article 1.5) which requires the ARB "to document the level of airborne emissions of pesticides which may be determined to pose a present or potential hazard..." when requested by the DPR. The documentation of airborne concentrations is usually accomplished through two types of monitoring. The first consists of five to eight weeks of **ambient** monitoring in the general area of, and during the season of, peak use of the specified pesticide. The second is monitoring around the perimeter of a field during and for 72 hours after an **application** has occurred. These are referred to as ambient and application monitoring, respectively. To help clarify the differences between these two monitoring programs, ambient and application are highlighted in bold in this document when the information applies specifically to either program. The purpose of this document is to specify quality assurance activities for the sampling and laboratory analysis of the monitored pesticide.

A. Quality Assurance Policy Statement

It is the policy of the ARB to provide DPR with accurate, relevant and timely air monitoring measurements of airborne pesticide concentrations. The goal of this document is to identify procedures that ensure the implementation of this policy.

B. Quality Assurance Objectives

Quality assurance objectives for pesticide monitoring are as follows.

- (1) to establish the necessary quality control activities relating to site selection, method validation, analytical standard operating procedures (SOP), sample collection, sampling and analysis protocol, data reduction and final reports, and;
- (2) to assess data quality in terms of precision, accuracy and completeness, and;
- (3) to design air monitoring strategies to meet the pesticide target (estimated) quantitation levels as provided by the DPR.

II. Air Monitoring

All sampling will be coordinated through communication with the County Agricultural Commissioner's Office. The local Air Quality Management District (AQMD) or Air Pollution Control District (APCD) will be notified prior to any monitoring. Sample collection will be conducted by staff of the Testing Section or staff of the Air Quality Surveillance Branch of the ARB, or an approved ARB contractor.

A. Siting

The location and time-frame for **ambient** and **application** monitoring are based on direction provided by the DPR in their "Use Information and Air Monitoring Recommendation for Pesticide Active Ingredient" documents. These recommendations are based on historical trends (normally 2 to 3 years prior) and are submitted to the ARB by the DPR approximately 1 year in advance of intended monitoring. The recommendations direct ARB to monitor for a pesticide in specific counties during specific use periods. Pesticide use maps (historical) and histograms are used along with close coordination with staff of the County Agricultural Commissioner's Office to predict areas (and times) of use for the pesticide for the upcoming year. Approximately one month prior to the scheduled monitoring DPR will reevaluate the historical use trends using the most recent pesticide use data available.

For selection of **ambient** monitoring sites, ARB staff work through authorized representatives of school districts, private companies or city, county or state government agencies. The probe (sampler) siting criteria for **ambient** pesticide monitoring were obtained from the U.S. EPA "Ambient Air Quality Surveillance" criteria (40 CFR, Part 58) and are listed in TABLE 1. As per the DPR monitoring recommendations, three to five sites are chosen. The monitoring objective in choosing these sites is to estimate population exposure in relatively high-population areas or in areas frequented by people (e.g., schools or school district offices, fire stations, or other public buildings). Sampling sites should be located near (in regions of) specific agricultural crops as recommended by the DPR. One additional site is chosen and designated to be an urban area "background" site which is located away from any expected applications. Information will be collected for each site and reported to DPR regarding; 1) the proximity of the each sampler to treated or potentially treated fields, including the distance and direction, and 2) the distance the sampler is located above the ground. Normally the **ambient** samplers will be located on the roof of a one-story building (e.g., at schools) with the sample cartridge located about 1.5 meters above the roof.

Probe siting criteria for placement of samplers around a pesticide **application** are the same as for **ambient** monitoring tests (TABLE I). A minimum of four samplers are positioned, one on each side of the field. A fifth sampler is collocated at one position, normally the downwind side (based on prevailing breezes). Once monitoring has begun, the sampling stations are not moved, even if the wind direction has changed. Ideally, samplers should be placed at a minimum distance of 20 meters from the perimeter of the field and should be equidistant from the field. *These requirements are nearly impossible to meet because of the physical limitations of most application sites. Twenty meters from a potential application field invariably places the sampler on another landowner's property, in another field where tractors and other equipment must operate, or into another orchard where the siting criteria cannot be met. Fences, canals, roads, ditches, railroad tracks, brush, trees, houses, barns, livestock, parked equipment, uncooperative neighbors, etc. are common-obstacles. Monitors are placed as far as possible, up to 20 meters, from the field. Attempts are always made to center the samplers on the face of a side of the field. The sampler is placed to maximize the distance from the field and to avoid obstructions bordering the field. Conditions at the site will dictate the actual placement of monitoring stations.* Information is collected and reported to DPR regarding; 1) an accurate record of the positions of the monitoring equipment with respect to the field, including the exact distance that

the sampler is positioned from the field; 2) an accurate drawing of the monitoring site showing the precise location of the meteorological equipment, trees buildings and other obstacles; 3) the elevation of each sampling station with respect to the field and the orientation of the field with respect to North (identified as true or magnetic North). Determination of an appropriate site for an **application** test is based on the "recommendations" provided by the DPR. Parameters used to choose the site are:

1. crop type,
2. minimum field area of 10 acres,
3. minimum application rate (as directed by the DPR),
4. type of application (normally no preference by the DPR),
5. availability of sites on all four sides of the field which meet the criteria in Table 1 and can be sited 20 meters from the perimeter of the field (quite often this is not possible, i.e., normally 4 sites are chosen but they may not all meet the criteria), and
6. accessibility and security of the sampling sites/equipment.

Monitoring sites (fields) are arranged through communication with, and the voluntary cooperation of, applicators, growers or owners for **application** monitoring. Normally, representatives of the County Agricultural Commissioner's Office will make initial contact with the applicators/growers or will at least provide a list of possible candidates.

TABLE 1. PESTICIDE PROBE SITING CRITERIA SUMMARY

Height Above Ground (Meters)		2-15
Minimum Distance from Supporting Structure (Meters)	Vertical	1
	Horizontal	1
Other Spacing Criteria		1. Should be 20 meters from trees.
		2. Distance from sampler to obstacle, such as buildings, must be at least twice the height the obstacle protrudes above the sampler.
		3. Must have unrestricted air flow 270° around sampler.
		4. Samplers at a collocated site (duplicate for quality assurance) should be 2-4 meters apart if samplers are high flow, >20 liters per minute.

B. Schedule

Samples for **ambient** pesticide monitoring will generally be collected over 24-hour periods on a schedule of 4 samples per week (Monday through Friday) for 5 to 7 weeks. Occasionally the normal schedule will be interrupted due to holidays and make-up samples may be collected over weekends.

Individual **application** monitoring schedules will vary based on the type and length of application but will follow the schedule guidelines outlined below in TABLE 2. Ideally, the

monitoring study will include samples taken before, during and for approximately 72 hours following application.

TABLE 2. GUIDELINES FOR APPLICATION SAMPLING SCHEDULE

Sample period begins:	Sample duration time
Background (pre-application)	Minimum of 12 hours
During application	Length of application time
End of application	1 hour (or up to 1 hour before sunset) ¹
1 hour post-application	2 hours (or up to 1 hour before sunset) ¹
3 hour post-application	3 hours (or up to 1 hour before sunset) ¹
6 hour post-application	6 hours (or up to 1 hour before sunset) ¹
1 hour before sunset	Overnight ² (until 1 hour after sunrise)
1 hour after sunrise	Daytime (until 1 hour before sunset)
1 hour before sunset	Overnight (until 1 hour after sunrise)
1 hour after sunrise	24-hour (until 1 hour after sunrise)

- 1 These sample duration times will be adjusted depending on length of application and time of sunset.
- 2 All overnight samples must include the period from one hour before sunset to one hour after sunrise. If the application extends beyond "1 hour before sunset" then the overnight sample will be started at the end of application.

Occasionally, a pesticide application may occur all day long and over the course of two or more days. In these instances samples are collected during the first daily application, followed by a sample from end of application to 1 hour before sunset, followed by an overnight sample ending at either the start of application or 1 hour after sunrise the next morning (same for second or more application days). Following the end of the application, samples are collected according to the above schedule, starting with the 1-hour sample.

C. Meteorological Monitoring

Data on wind speed and direction, barometric pressure, relative humidity and air temperature will be collected during application monitoring by use of an on-site meteorological station. The meteorological data will be acquired using a data logger at a minimum of 15 minute intervals (averages). Meteorological systems will be calibrated as specified in the ARB manual, "Air Monitoring Quality Assurance, Volume II, Standard Operating Procedures for Air Quality Monitoring." Meteorological data are not collected for the ambient monitoring programs.

III. Method Validation

A. Method Detection Limit

The method detection limit (MDL) is defined as the lowest concentration at which individual measurement results for a specific analyte are statistically different from a blank (that may be zero) with a specified confidence level for a given method and matrix.

MDL is defined as $3.14 \times s$; where s is equal to the standard deviation of seven replicate spiked samples (e.g., XAD sample cartridges). The spiked samples are prepared and analyzed in the same way as actual samples. The spikes should be prepared at a concentration that is between one to five times the estimated MDL.

B. Estimated Quantitation Limit

The estimated quantitation limit (EQL) is the recommended lowest level for quantitative decisions based on individual measurements for a given method and representative matrix. This EQL is defined as $5 \times \text{MDL}$.

C. Reproducibility

The reproducibility of the method should be determined by performing five replicates at three different concentrations. The lowest level should be at or near the EQL. The average and standard deviation of each set of replicates should be determined and reported.

D. Extraction Efficiency

Extraction efficiency is defined as the amount of pesticide recovered from a spiked sample. Three replicates at two levels and blank should be extracted with the average and standard deviation determined for the replicates. The average amount divided by the amount added multiplied by 100 will give the percent recovery. Recommended recoveries should be between 70-130%.

E. Sampling Efficiency

Sampling efficiency is determined by spiking a sample with a known amount of pesticide. The spiked sample is placed in a sampler and set to the same flow rate and time that samples are collected. At a minimum three replicate spiked samples at a concentration two times the EQL of the method and a collocated background are collected. The samples are extracted and average recovery and standard deviation of the spike samples are determined.

F. Breakthrough

Breakthrough is determined by using a two stage sampling media (usually a filter or resin). The front stage is spiked with a known quantity of the pesticide. The breakthrough study samples are normally spiked at a relatively high level, e.g., at a level that might be observed.

during an application study. If time and resources permit, both low and high level spike studies are run. The backup will be the same filter or resin type and placed in series with the front filter or resin. Air is passed through the sampler at the same flow rate and sample time as a real sample (minimum sample time of 24 hours). The front and backstage are recovered and extracted separately. If breakthrough is observed then the sampling strategy must be reviewed, modified and retested before the start of a sampling project.

G. Freezer Storage Stability

Spiked samples should be stored under the same conditions as the samples and for the anticipated time that the samples are stored. Recoveries are determined. A high (either at a level expected during the application study or at the high end of the calibration curve) and a low (1 to 2 times the EQL) concentration set should be studied. A set consists of three replicate spikes each for 3 time intervals.

IV. Field Sampling Quality Control Procedures

Monitoring programs will include the following quality control procedures:

A. Sample Labels

Sample labels will be affixed either directly to the sampling cartridge or will be placed in the individual sample container (e.g., culture tube or zip-lock bag). The sample labels will include at least the following information.

1. Pesticide name and the ARB project number.
2. Log number
3. Sample I.D.
4. Monitoring Location
5. Sampling end date
6. General comments

B. Log Sheets

Field data log sheets will be used to record the sampling log number, sample I.D., start and stop dates, start and stop times, start and end flow rate, initials of individuals conducting sampling, malfunctions, leak checks (at the beginning and end of each sampling period, see Appendix I), weather conditions (e.g., rain) and any other pertinent data which could influence sample results. Refer to Appendix I for a recommended log sheet format.

C. Chain of Custody Forms

Attached as Appendix II is a recommended format for chain of custody (COC) sheets. A COC sheet must accompany any/all samples during transport, transfer or storage. All exchanges of sample possession must be recorded. The laboratory will keep copies of the COCs and

forward the originals to the project engineer. The original COC sheets must be retained in the pesticide project file.

D. Flow Controller Calibration and Audit

Field flow controllers (rotameter, electronic flow controller or critical orifice) shall be calibrated against a referenced standard prior to a monitoring period. This referenced standard (e.g., digital bubble flowmeter or electronic digital mass flowmeter) must be verified, certified or calibrated with respect to a primary standard at least once per year by the Quality Management and Operations Support Branch (QMOSB) of ARB. Appendix V shows an example of a form to document the flow controller calibration results.

A flow audit of the field air samplers will be conducted by the QMOSB before each pesticide monitoring project. If results of this audit indicate a difference from the calibrated values of more than 10%, then the field flow controllers should be rechecked until they meet this objective. A written report of the QMOSB audit results will be included as an appendix in the final monitoring report.

Sampling flow rates should be checked in the field and noted before and after each sampling period. A separate, certified flow meter (i.e., not the one used in the sample train to control flow) will be used to check the flow. The flow rates should be checked after the initial sampling system leak check and before the "end" sampling system leak check.

E. Background Sampling

A background sample will be taken at all sites (4 sides) prior to an **application** test. The duration of the background sample should be sufficient to achieve the pesticide target 24-hour EQL, as directed by the DPR prior to the test, and must be a minimum of twelve hours and up to 24 hours if scheduling permits. This sample will establish if any of the pesticide being monitored is present in the air prior to the application. It also can indicate if other environmental factors are interfering with the detection of the pesticide of concern during analysis.

While one of the sampling sites for **ambient** monitoring is referred to as an "urban area background," it is not a background sample in the conventional sense because the intent is not to find a non-detectable level or a "background" level prior to a particular event (or application). This site is chosen to represent a low probability of finding the pesticide and a high probability of public exposure if significant levels of the pesticide are detected at this urban background site. Detectable levels of some pesticides may be found at an urban area background site if they are marketed for residential as well as commercial/agricultural use. An example of an urban area background site is the ARB air monitoring station in downtown Fresno.

F. Collocated Samples

For both ambient and application monitoring, the method precision will be demonstrated in part by collecting samples from collocated samplers (replicate analysis of samples also relates to method precision). An additional **ambient** sampler will be collocated at each of the sampling

sites. Normally, collocated samples will be collected at each ambient site every Wednesday for each week of sampling. The samplers should be located at least two meters apart if they are high volume samplers (>20 Lpm) in order to preclude airflow interference. This consideration is not necessary for low flow samplers. The collocated sampler for application monitoring should be positioned at the downwind sampling site where the highest concentrations are expected. The collocated site is not changed after the study starts.

G. Trip Blanks

A trip blank should be included with each batch of samples submitted for analysis. This will usually require one trip blank for an application monitoring study and one trip blank per week for an ambient monitoring program. Trip blanks are prepared by opening a sampling cartridge (e.g., breaking the ends of an XAD glass tube) in the field followed by normal labeling and sample transport (i.e., along with the samples).

H. Laboratory, Trip and Field Spikes

The *laboratory, trip and field* spikes are prepared, extracted and analyzed at the same time and they are generally all spiked at the same level. The *laboratory* spikes are immediately placed in the laboratory refrigerator (or freezer) and kept there until extraction and analysis. The *trip* spikes are kept in the freezer until transported to the field. The trip spike samples are kept on dry ice in an ice chest (the same one used for the samples) during transport to and from the field and at all times while in the field except for trip spike sample log-in and labeling. The *field* spikes are stored and transported in the same way as the trip spikes. However, field spikes are obtained by sampling ambient air through the spiked cartridge at the same environmental and experimental conditions as those occurring at the time of the study.

Ambient field spikes are collocated (same location, flow rate and sampling period) with a sample collected at the urban background sampling site (to minimize background concentrations). **Ambient** field spikes are normally prepared at a level of approximately 2 times the EQL, or at a level representative of ambient concentrations.

Application study field spikes are collocated with the background samples collected at the four sides of the application site (i.e., one background and one field spike per side). **Application** field spikes are normally prepared at a level close to expected air concentrations. Field spike results are corrected by subtracting the amount of pesticide residue found in the collocated, unspiked sample before calculation of residue recoveries.

I. Transportation of Samples

All samples will be capped, placed in a sample container (e.g., culture tube or zip-lock bag) and placed in an ice chest on dry ice immediately following sample collection and labeling. The samples will remain on dry ice until transferred to the laboratory and will then be stored in the lab refrigerator or freezer. Any special handling procedures will be identified during the method validation and will be outlined in the SOP.

J. Meteorological Station Calibration

Meteorological station calibration procedures will be performed as specified by the ARB manual, "Air Monitoring Quality Assurance, Volume II, Standard Operating Procedures for Air Quality Monitoring."

K. Preventive Measures

To prevent loss of data, spare pumps and other sampling materials should be kept available in the field by the operator. A periodic check of sampling pumps, meteorological instruments, extension cords, etc., should be made by sampling personnel.

V. Analysis

Method development and analysis of all field samples must be conducted by a fully competent laboratory. To ensure the capability of the laboratory, a systems audit may be performed, upon request, by the ARB Quality Management and Operations Support Branch (QMOSB) prior to the first analysis per a pesticide project. After a history of competence is demonstrated, an audit prior to each pesticide project is not necessary. However, during each pesticide project, the spiked samples discussed above should be provided to the laboratory to demonstrate accuracy and precision. These spiked samples will be prepared by qualified ARB laboratory staff.

If using GC/MS, isotope dilution is the recommended method for quantitation. Isotope dilution is where the isotope analog of the target compound is spiked to the sample prior to sample preparation. The internal standard goes through the same sample and analytical steps that the target analyte does thus compensating for losses during sample preparation and instrument variability during analysis. When no isotope is available an internal standard is recommended. An internal standard is spiked to the sample just prior to analysis. The internal standard compensates for instrument variability. If no suitable internal standard is found then an external standard method may be used.

VI. Analytical Quality Control Procedures

A. Mass Spectrometer Tuning (if MS is used)

A daily tune shall be performed using perfluorotributyl amine (PFTBA). The MS should be calibrated to optimize the MS for the mode of operation and type of pesticide analyzed. Documentation and performance criteria shall be specified in the standard operating procedure. A record of the tune for each batch should be kept on file. A daily tune must be performed prior to the analysis of an analysis sequence and every 24 hours during an analysis sequence. If longer intervals between tunes are used, then the stability of the MS must be demonstrated during the method development phase and approved prior to the sample analysis.

B. Calibration

Initial Calibration

At the beginning of method development an initial multi-point calibration curve is performed to demonstrate the calibration range of the pesticide analyzed. A typical multi-point calibration consists of 5 different concentrations with a single replicate at each concentration. The calibration range usually should not exceed 40:1 with the lowest level standard at the EQL unless there is no need to measure values as low as the EQL. Depending on the linear range of the analyte, multi-points with other than 5 levels may be used although a multi-point with less than 3 levels is not permitted. Typically a linear calibration is preferred although a dynamic range using a quadratic is acceptable. For quadratic calibration curves quantitation can only be performed within the calibration range. Sample above the calibration curve must be diluted into the calibration range and reanalyzed.

Daily Calibration

Prior to the analysis of a set of samples a calibration must be performed. This calibration is called the daily calibration. The daily calibration is either a multi-point calibration or a mid-point calibration. The mid-point calibration consists of a single calibration at the mid-point of the initial multi-point calibration curve. If the mid-point is within a prescribed range (i.e., within +/- 20% of the original calibration) as determined from the initial calibration then the original initial calibration is still considered valid and the response is replaced. If the mid-point calibration is outside that range then another multi-point calibration must be performed. A calibration check at the same level is also run. If the mid-point calibration and the midpoint calibration check are within a prescribed range (i.e., +/-20%) of each other then analysis can begin. If the calibration check is outside the specified range then the problem must be rectified before analysis can begin.

C. Reagent Blanks.

A reagent (solvent) blank is performed at least for every batch of reagent used. The reagent blank uses the same solvent that was used for the sample preparation. The blank should be free of interferences. If low level contamination of the pesticide residue is found in the reagent blank (as may happen when using isotope dilution), then a reagent blank will be performed before analysis of each batch of samples. A reagent blank must be analyzed after any sample which results in possible carry-over contamination.

D. Laboratory Control Blank.

A laboratory blank is run with each batch of samples. A laboratory control blank (blank sampling media, e.g., resin cartridge or filter) is prepared and analyzed by the same procedures as used for field samples. Laboratory blank results must be no higher than 20% of the lowest value reported.

E. Laboratory Control Spike.

A laboratory control spike (LCS) is a resin cartridge spiked (at the level of the midpoint of the daily calibration runs) with a known amount of standard. The LCS is prepared and analyzed the same way as the samples. Two LCS are performed for each batch of samples. Laboratory control spikes need to be within 40% (100* difference/average) of each other and have recoveries that are +/-30% of the theoretical spiked value. If in the method development stage it is found that the differences or recoveries are larger, then they must be approved by ARB before the analysis can begin.

F. Calibration Check Samples.

A calibration check sample (CCS) is a mid-point standard run after every tenth sample in an analysis set. The purpose of the CCS is to ensure sample drift is within specified values. The CCS sample must be within +/- 25% of its theoretical value. If the standard is outside this range, then the samples associated with that calibration check sample must be reanalyzed. If in the method development stage it is found that the CCS variation is greater than 25%, then the percent variation limit used for the method must be approved by the ELB Branch Chief before the analysis can begin.

G. Duplicate Analysis.

A duplicate analysis is a sample analyzed in duplicate as a measure of analytical precision. Every tenth sample of an analysis set must be run in duplicate.

H. Standard Operating Procedures

Analytical methods must be documented in a Standard Operating Procedure (SOP) before monitoring begins. The recommended format for the SOP is provided in Appendix III. The SOP will include a discussion of all of the procedures outlined above in this section. The SOP will also include a summary of method development results as outlined in Section III above.

VII. Sampling and Analysis Protocol

Prior to conducting any pesticide monitoring, a sampling and analysis protocol, using this document as a guideline, will be written by the ARB staff. The protocol describes the overall monitoring program, the purpose of the monitoring and includes the following topics:

1. Identification of the sample site locations, if possible.
2. Description of the sampling train and a schematic showing the component parts and their relationship to one another in the assembled train, including specifics of the sampling media (e.g., resin type and volume, filter composition, pore size and diameter, catalog number, etc.).

3. Specification of sampling periods and flow rates.
4. Description of the analytical method (SOP included if possible).
5. Tentative test schedule and expected test personnel.
6. Safety information specific to the pesticide monitored.

Specific sampling methods and activities will also be described in the monitoring plan (protocol) for review by ARB and DPR. Procedures which apply to all sampling projects include: (1) sample log sheets (APPENDIX I), (2) chain of custody forms (APPENDIX II), (3) sunlight and rain shields for sample protection during monitoring, (4) sample storage in an ice chest on dry ice until delivery to the laboratory, (5) trip blanks and, (6) laboratory, trip and field spikes. The protocol should include: equipment specifications (when necessary), special sample handling and an outline of sampling procedures. The protocol should specify any procedures unique to a specific pesticide.

VIII. Final Reports and Data Reduction

The mass of pesticide found in each sample should be reported along with the volume of air sampled (from the field data sheet) to calculate the mass per volume for each sample. For each sampling date and site, concentrations should be reported in a table as $\mu\text{g}/\text{m}^3$ (microgram per cubic meter) or ng/m^3 (nanogram per cubic meter). When the pesticide exists in the vapor phase under ambient conditions, the concentration should also be reported as ppbv (parts per billion, by volume) or the appropriate volume-to-volume units at conditions of 1 atmosphere and 25 °C. Collocated samples should be reported separately as raw data, but then averaged and treated as a single sample for any data summaries. For samples where the end flow rate is different from that set at the start of the sampling period, the average of these two flow rates should be used to determine the total sample volume.

The final report should indicate the dates of sampling as well as the dates of laboratory receipt, extraction and analyses. These data can be compared with the stability studies to determine if degradation of the samples has occurred.

Final reports of all monitoring studies are sent to the Department of Pesticide Regulation, the Office of Environmental Health Hazard Assessment, the Department of Health Services, the Agricultural Commissioner's Office, the local AQMD as well as the applicator and/or the grower. Final reports are available to the public by contacting the ARB Engineering and Laboratory Branch.

A. Ambient Reports

The final report for ambient monitoring should include a map of the monitored area which shows nearby towns or communities and their relationship to the monitoring stations, along with a list of the monitoring locations (e.g., name and address of the business or public building)

including the locations Range/Township/ Section. A site description should be completed for any monitoring site which might have characteristics that could affect the monitoring results (e.g., obstructions). For ambient monitoring reports, information on terrain, obstructions and other physical properties which do not conform to the siting criteria or may influence the data should be described. Information will be collected for each site and reported to DPR regarding; 1) the proximity of the each sampler to treated or potentially treated fields, including the distance and direction, and 2) the distance the sampler is located above the ground.

Ambient data should be summarized for each monitoring location by maximum and second maximum concentration, average ("detected" results are factored in as $(MDL+EQL)/2$, <MDL results are factored in as $MDL/2$), total number of samples, number of samples above the estimated quantitation limit (EQL), number of samples "detected" and the number of samples below the MDL. For this purpose, collocated samples are averaged and treated as a single sample.

B. Application Reports

Similarly, a map or sketch indicating the general location (nearby towns, highways, etc.) of the field chosen for application monitoring should be included as well as a detailed drawing of the field itself and the relative positions of the monitors. For application monitoring reports, as much data as possible should be collected about the application conditions (e.g., formulation, application rate, acreage applied, length of application and method of application). This may be provided either through a copy of the Notice of Intent, the Pesticide Control Advisor's (PCA) recommendation or completion of the Application Site Checklist (APPENDIX IV). Meteorological data will be reported in 15 minute averages for the application site during the monitoring period. Meteorological and pesticide air concentration data will also be summarized as wind roses for each application sampling period. The raw meteorological data file will also be transferred to DPR on 1.44 mb floppy disk.

C. Quality Assurance

All quality control and quality assurance samples (blanks, spikes, collocated etc.) analyzed by the laboratory must be reported. Results of all method development and/or validation studies (if not contained in the S.O.P.) will also be reported. The results of any quality assurance activities conducted by an agency other than the analytical laboratory should be included in the report as an appendix. This includes analytical audits, system audits and flow rate audits.

APPENDIX I
SAMPLE FIELD LOG BOOK

APPENDIX II
CHAIN OF CUSTODY FORM

CHAIN OF CUSTODY FORM
 CALIFORNIA AIR RESOURCES BOARD
 MONITORING AND LABORATORY DIVISION
 P.O. Box 2815, Sacramento CA 95812
 PESTICIDE
 CHAIN OF CUSTODY

SAMPLE RECORD

Job #: _____ Date: _____
 Sample/Run #: _____ Time: _____
 Job Name: _____
 Sample Location: _____
 Type of Sample: _____
 Log #'s: _____

ACTION	DATE	TIME	INITIALS		METHOD OF STORAGE
			GIVEN BY	TAKEN BY	
Sample Collected					freezer, ice or dry ice
Transfer					

LOG #	ID #	

RETURN THIS FORM TO: _____

APPENDIX III

ANALYTICAL STANDARD OPERATING PROCEDURE FORMAT

ELEMENTS TO BE INCLUDED IN LABORATORY STANDARD OPERATING
PROCEDURES FOR PESTICIDE AIR ANALYSIS

Engineering and Laboratory Branch
Air Resources Board
April 1999

I. SCOPE

- A. Description of scope and detection limits of pesticide(s) to be analyzed.
- B. Documents and references upon which method is based.
- C. Definitions of any special terms must be given.

II. SUMMARY OF METHOD

- A. General description of sampling and analytical procedure. Enough information should be included for an experienced analyst to readily recognize the principles of operation.

III. INTERFERENCES AND LIMITATIONS

- A. Comments made here should cover both analytical and sampling problems, known and potential.

IV. EQUIPMENT AND CONDITIONS

- A. INSTRUMENTATION: As specific a description as possible. Any modifications or improvements of the basic system must have an accompanying schematic. For chromatographic analysis list columns, flow rates, temperatures, detectors, amplifier ranges and attenuations, sample volumes, etc.
- B. AUXILIARY APPARATUS: Provide a description of the function and operating conditions. Include a description of the sampling equipment if the equipment is specific to this method. For example, "Vacuum pump, ACME Model 62, capable of maintaining a 1 CFM Air Flow at 10" vacuum."

V. REAGENTS AND MATERIALS

- A. Provide a list of all reagents used and specify purity and/or grade.
- B. Describe preparation of any special reagents for analysis and sampling.
- C. Specify composition, preparation, and concentrations of stock, intermediate, and working standards.
- D. Describe in detail any necessary safety precautions for handling and disposition of chemicals.

VI. PROCEDURES

A. FIELD SAMPLING TECHNIQUES

1. Refer to appropriate Field Sampling S.O.P. for exact details of sampling, chain of custody and sample identification procedures.
2. Describe equipment used.
3. List sampling conditions: materials, flow rates, etc.
4. Describe any potential problems and limitations, with means of controlling such problems.
5. Describe any methods used to split samples for other types of analyses, if necessary.

B. LABORATORY SAMPLE PREPARATION/PRETREATMENT TECHNIQUES

1. Describe (or refer to an appropriate section of a Laboratory Quality Control Manual) a protocol for sample log-in procedures, including document control and sample examination for damage. Any possible hazards due to toxic or flammable chemicals must be clearly identified. Any sample storage requirements, such as immediate refrigeration or protection for light must be noted.
2. Describe any methods used for preconcentration, dilution clean-up filtration, extraction, concentration, etc., after the sample is received from the field.

C. ANALYSIS

1. Describe as clearly as possible the exact instrument configuration and set-up techniques
2. Describe analysis blank and calibration procedure with associated limits on precision and accuracy. Describe analysis of Control Samples and limits of the resulting data. Describe steps taken in an "out-of-control" situation. Specify the format and location of recorded calibration and Control Sample data.
3. Describe sample analysis. Description must include an example of expected data (for example, a sample chromatogram with all components of interest labeled).
4. Give calculation procedures for results. Describe data recording and data submittal.

VII. PERFORMANCE CRITERIA

- A. Describe frequency of duplicate analyses, spikes, field blanks, and acceptable limits of each.
- B. Describe frequency of multiple standard analyses to check method linearity and detection limit.
- C. If confirmatory method is used, refer to specific S.O.P.

VIII. METHOD VALIDATION

Validation testing should provide an assessment of accuracy, precision, interferences, method recovery, method detection limit and estimated quantitation limit. Method documentation should include confirmation testing with another method when possible, and quality control activities necessary to routinely monitor data quality control such as use of control samples, control charts, use of surrogates to verify individual sample recovery, field blanks, lab blanks and duplicate analysis. All data should be properly recorded in a laboratory notebook.

The method should include the frequency of analysis for quality control samples. Analysis of quality control samples are recommended before each day of laboratory analysis and after every tenth sample. Control samples should be found to be within control limits previously established by the lab performing the analysis. If results are outside the control limits, the method should be reviewed, the instrument recalibrated and the control sample reanalyzed.

All quality control studies should be completed prior to sampling and include recovery data from at least three samples spiked at least two concentrations. Instrument variability should be assessed with three replicate injections of a single sample at each of the spiked concentrations. A stability study should be done with triplicate spiked samples being stored under actual conditions and analyzed at appropriate time intervals. This study should be conducted for a minimum period of time equal to the anticipated storage period. Prior to each sampling study, a conversion/collection efficiency study should be conducted under field conditions (drawing ambient air through spiked sample media at actual flow rates for the recommended sampling time) with three replicates at two spiked concentrations and a blank. Breakthrough studies should also be conducted to determine the capacity of the adsorbent material if high levels of pesticide are expected or if the suitability of the adsorbent is uncertain. The following data will be included in the SOP.

- A. A table describing linearity (correlation coefficients), accuracy (method bias), precision (standard deviations at all levels analyzed), and detection.
- B. Data on sampling efficiencies, stability, pertinent breakdown products, break through volumes and desorption efficiencies.
- C. Data on storage stability and conditions for samples and standards.
- D. References to quality assurance information derived from published and/or interlaboratory sources if available.

APPENDIX IV
APPLICATION CHECKLIST

APPLICATION CHECKLIST

1. Pesticide:
2. County:
3. Crop:
4. Field Address:
5. Field Location (R/T/S):
6. Field Size (acres):
7. Contact Person:
8. Background Monitoring Period:
9. Target EQL Met?:
10. Product Applied:
11. Application Rate:
12. Comments on Tank Mix:
13. Method of Application (ground, air, irrigation, injection, tarping etc.):
14. Start of Application:
15. End of Application:
16. Pattern of Application: (e.g., east to west):
17. Weather Conditions:
18. Met Station Location (and elevation):
19. Any Other Applications in Area:
20. Sampler Elevations:

- Camera pictures of each sampler from all 4 directions
- Camcorder video of each sampler in relation to field and surroundings
- Rotameter #s logged
- Check dimensions of field with known acreage (43560 ft²/acre) & compare sides
- Crops around field labeled on diagram

APPENDIX V

FLOW CONTROLLER CALIBRATION FORM

FLOW CONTROLLER; 1-POINT FLOW CALIBRATION SHEET

Project: _____ Pre: _____ Post: _____ Project #: _____ Date: _____

 Desired Flow Rate: _____ Calib. by: _____
 _____ (name)

BUBBLEMETER READINGS

Controller ID: _____
 Controller Set: _____
 -Readings: _____
 -Readings: _____
 -Readings: _____
 Average: _____
 Deviation: _____

Controller ID: _____
 Controller Set: _____
 -Readings: _____
 -Readings: _____
 -Readings: _____
 Average: _____
 Deviation: _____

Average of Averages _____ :

PROCEDURE

1. Set-up sampler as if to collect sample, including filled sample cartridge.
2. Set flow controller to achieve desired flowrate and record controller setting.
3. Observe and record Bubblemeter flow (on form or direct to floppy - Change File name).
4. Reset to zero. Then repeat step 3 two more times.
5. Calculate the average of 3 readings.
6. Repeat steps 1 thru 5 for each Rotameter.
7. Average of Averages and Deviation automatically calculated. Replace any Rotameters that deviate by 10% or more from the Average of Averages.
8. QA Section will get a copy for comparison with their results for the same setups.

Attachment II

Standard Operating Procedure, Sampling and Analysis of Trichloronitromethane
(Chloropicrin) in Application and Ambient Air
using Gas Chromatography/Mass Selective Detector

California Environmental Protection Agency



**Standard Operating Procedure for
Sampling and Analysis of Trichloronitromethane
(Chloropicrin) in Application and Ambient Air using Gas
Chromatography/Mass Selective Detector**

**Special Analysis Section
Northern Laboratory Branch
Monitoring and Laboratory Division**

**Revision 1
10/29/02**

Approved by:

**Russell Grace, Manager
Special Analysis Section**

DISCLAIMER: Mention of any trade name or commercial product in this Standard Operating Procedure does not constitute endorsement or recommendation of this product by the Air Resources Board. Specific brand names and instrument descriptions listed in the Standard Operating Procedures are equipment used by the ARB laboratory. Any functionally equivalent instrumentation can be used.

1. SCOPE

The current method is for the analysis of trichloronitromethane (TCNM) using a gas chromatograph/mass selective detector. The procedure is for the analysis of application and ambient air monitoring of TCNM using XAD-4 resin tubes. The Department of Pesticide Regulation (DPR) asked the Air Resources Board (ARB) to analyze for TCNM during agricultural/structural application with a requested quantitation limit of $1.0 \mu\text{g}/\text{m}^3$ and ambient monitoring with a quantitation limit of $0.1 \mu\text{g}/\text{m}^3$.

2. SUMMARY OF METHOD

Resin tubes, XAD-4, are placed on the sampler for 24 hours at a flowrate of 0.1 liters per minute (LPM or 100 mLPM). The samples are stored in an ice chest or refrigerator until extracted with 3.0 ml of dichloromethane (DCM). A gas chromatograph with a mass selective detector in the selected ion monitoring (SIM) mode is used for analysis.

3. INTERFERENCES/LIMITATIONS

Interferences may be caused by contaminants in solvents, reagents, glassware and other processing apparatus that can lead to discrete artifacts or elevated baselines. A method blank, including both solvent and resin, must be analyzed with each batch of samples to detect any possible interferences.

4. EQUIPMENT AND CONDITIONS

A. INSTRUMENTATION:

Hewlett-Packard 6890 Series gas chromatograph
Hewlett-Packard 5973 Network mass selective detector
Hewlett-Packard 6890 Enhanced-Parameters ALS

MS Transfer line: 280°C

Injector: 210°C, Splitless, Liner 4 mm straight liner with glass wool

Column: Restek Rtx-200, 60 meter, 320 μm i.d., 1.5 μm film thickness, or equivalent

GC Temperature Program: Oven initial 40°C, hold 4 min. Ramp to 220°C @ 12°C/min., hold 1 min., ramp to 240°C @ 20°C/min., hold 2.0 min.

Retention time: TCNM 11.93 min.

Splitter open @ 1.0 min.

Flows: Column: He, 1.6 ml/min, 9.1 psi. (velocity: 32cm/sec)

Splitter: 50 ml/min.

Mass Spectrometer: Electron Ionization

Selective Ion Monitoring: trichloronitromethane: 117 (quant. ion 100%), 119 (qual. ion 98%); Tuning: PFTBA on masses 69, 219, 502

B. Auxiliary Apparatus

1. Precleaned vials, 8-ml capacity with teflon caps
2. Whatman filters, 0.45 μm
3. Disposable syringes, 3 ml
4. Sonicator
5. GC vials with septum caps

C. Reagents

1. Dichloromethane, Pesticide grade or better
2. Trichloronitromethane, Chem Service PS-4, 98.8%
3. XAD-4 resin sorbent tubes, 400/200mg, SKC, Fullerton, CA

5. ANALYSIS OF SAMPLES

1. A daily manual tune shall be performed using PFTBA. The instrument is tuned using masses: 69, 219, 502. The criterion for the tune are the peak widths at $\frac{1}{2}$ the peak height, 0.60 ± 0.05 , and the criteria for relative abundance: 69:100%, 219:90-120%, and 502: 5-12%.
2. It is necessary to analyze a solvent blank with each batch of samples. The blank must be free of interferences. A solvent blank must be analyzed after any sample that may result in possible carry-over contamination.
3. A five-point calibration curve shall be analyzed with each batch of samples. For the ambient studies the calibration will be 5.0-50.0 ng/mL and for the application studies 50.0-500 ng/mL.
4. A calibration check sample (7.5 ng/ml for ambient, and 75 ng/ml for application) is run after the calibration, after every ten samples and at the end of the sample batch. The value of the calibration check must be within $\pm 3\sigma$ (the standard deviation) or $\pm 10\%$ of the expected value whichever is greater. If the calibration check is outside this limit, then those samples in the batch after the last calibration check that was within limits need to be reanalyzed.
5. With each batch of samples analyzed, a laboratory blank and a laboratory control spike will be run concurrently. A laboratory blank is XAD-4 extracted and analyzed the same way as the samples. A laboratory control spike is XAD-4 spiked with a known amount of standard. The laboratory control

sample is extracted and analyzed the same way as the samples. Laboratory control samples should have recoveries that are greater than or equal to 70% of the theoretical spiked value.

6. Score and snap the sample resin tube, transfer the front bed of the resin tube into an 8-ml vial. (Save the back-up bed for future analysis if necessary.) Rinse the tube with 3.0 ml of DCM into the extraction vial. Cap and place the vial in the sonicator for one hour.
7. Filter the samples using 0.45 μm filter attached to a 3-ml syringe directly into a GC vial and cap securely.
8. The atmospheric concentration is calculated according to:

$$\text{Conc (ng/m}^3\text{)} = \text{Extract Conc (ng/ml)} \times 3 \text{ ml} / \text{Air Volume Sampled (m}^3\text{)}$$

6. QUALITY ASSURANCE

A. Instrument Reproducibility

The reproducibility of the instrument and analytical method was established by analyzing five (5) 1.0 μl injections of trichloronitromethane standard at three concentrations (low, mid, and high). The low, mid and high concentrations were 5, 20 and 50 ng/ml, respectively.

B. Calibration

A five-point calibration curve is made ranging from 5.0 ng/ml to 50.0 ng/ml for ambient monitoring and 50 ng/ml to 500 ng/ml for application monitoring.

C. Calibration Check

A calibration check sample is run after the calibration, after every ten samples and at the end of the sample batch to verify the system is in calibration. The value of the check must be within $\pm 3\sigma$ (the standard deviation) or $\pm 10\%$ of the expected value whichever is greater. If the calibration check is outside the limit, then those samples in the batch after the last calibration check that was within the limit need to be reanalyzed.

D. Minimum Detection Limit

The detection limit is based on US EPA MDL calculation. Using the analysis of seven (7) replicates of a low-level matrix spike, the method detection limit (MDL) and the estimated quantitation limit (EQL) for trichloronitromethane is calculated

by: $MDL = 3.14 * (\text{std dev values})$, where std dev = the standard deviation of the concentration calculated for the seven replicate spikes. For TCNM the MDL is 3.96 ng/sample (1.32 ng/mL). EQL, defined as $5 * MDL$, is 19.8 ng/sample (6.60 ng/mL) based on a 3.0 ml extraction volume. Results are reported to three significant figures. Results below EQL but above the MDL are reported as DET (detected) and results less than the MDL are reported as ND (nondetect) or <MDL.

E. Collection and Extraction Efficiency (Recovery)

Trichloronitromethane at a low and high level are spiked on XAD-4 tubes (three at each concentration). The spiked tubes are placed on field samplers with airflows of 100 mLpm for 24 hours. The samples are extracted with DCM and prepared as described in section 5, #6-7. The average percent recovery of trichloronitromethane should be $\pm 20\%$ of the expected value. The recoveries both for the low and high levels are greater than 80.0%.

F. Storage Stability

Storage stability was set up for a four-week study. Three (3) XAD-4 tubes each were spiked at the low and high-end concentrations. The tubes were stored in the freezer until analyzed. At the low-end concentrations (5 ng/ml), the recovery for the three spikes averaged 106.8 percent, ranging from 103.68 to 113.68 percent. The average percent recovery peaked after fourteen days and was at the lowest after 28 days. At the high end (50 ng/ml), the recovery for the three spikes averaged 90.24 percent, ranging from 88.90 to 92.00 percent. The average percent recovery peaked at fourteen days and was at the lowest at twenty days.

G. Breakthrough

The most recent study for ambient monitoring for 24 hours required a low sample flow rate to meet the requested EQL. A new breakthrough analysis study was conducted. The flow rates tested were 1.0, 0.5, 0.2 and 0.1 Lpm. To meet the EQL and minimize breakthrough possibility, the flow rate for the field sampling was set at 100 mLpm.

H. Safety

This procedure does not address all of the safety concerns associated with chemical analysis. It is the responsibility of the analyst to establish appropriate safety and health practices. For hazard information and guidance refer to the material safety data sheets (MSDS) of any chemicals used in this procedure.

Attachment III

Application Sampling Procedures
For Adsorbent Tubes

Application Sampling Procedures For Adsorbent Tubes

Overview:

- Collect samples, according to the schedule in Table 1 of this protocol.
- Collect 4 background samples, from each corner sampling position.
- Collocate 1 field spike with each of the 4 background samples.
- Collect a collocated sample from the downwind site for all sampling periods (except the background period).
- Submit 1 trip blank.
- With the trip blank there should be a total of 59 samples collected during the study, plus 4 trip and 4 field spikes.
- All samples are stored either in an ice-chest on dry ice or in a freezer.
- The field log sheet is filled out as the sampling is conducted. All QA samples must be logged onto the log sheet.
- The chain of custody (COC) forms are filled out prior to sample transfer; the originals are transferred with the samples; make and retain copies if desired (not necessary).

Sampling Procedure:

Materials that will be needed to conduct the sampling include:

- Clip board with log sheets
- pencils/pens
- sample labels
- sample cartridges
- end caps
- plastic test tubes
- zip-lock bags
- 0 to 2 00 sccpm mass flow meter (MFM) with battery
- ice chest
- dry ice

Figure out the route for sampling the 8 locations and try to keep this the same throughout the study.

Preparation and Set-up

On the way to study site, plug the MFM into the battery. It takes the MFMs about 10 minutes to warm up before they can be used. Leave the MFM plugged in until the last

sample is taken; unplug when not in use to minimize drop in battery charge. Recharge the batteries once per week to be on the safe side.

Securely attach one adsorbent sample cartridge to the sampling tree. **MAKE SURE THE ARROW ON THE CARTRIDGE IS POINTING TOWARDS THE SAMPLE LINE.**

Using the 0-200sccpm MFM set the flow rate exactly to 100 sccpm. Use the MFM calibration linear regression equation to set the flow rate.

Make sure that the rain/sun cover is pulled down over the sample tube.

Fill out the log sheet, including: log #, start date, time, start counter reading, leak check OK, MFM Serial #, any comments and the weather conditions.

Sample collection and Shipment

Measure (do not re-set) the flow rates at the end of the sampling period with the MFM; leak check the sample lines; record the end data on the log sheet.

Remove the sample cartridge and cap the ends. Attach the sample label like a flag on the secondary end of the tube. Make sure that the label does not cover the glass wool separating the primary and secondary beds in the cartridge.

Place the cartridge in the plastic test tube shipping container.

Place all the samples for each period in a zip-lock freezer storage bag and place on dry ice in a cooler.

Collect a trip blank (TB) by breaking the ends off of a tube, capping and labeling as usual and storing along with the rest of the samples. Log the TB into the log sheet.

Attachment IV

Field Log Sheet

Attachment V

**Chloropicrin and Methyl Bromide
"Information Profiles"**

EXTOXNET

Extension Toxicology Network

Pesticide Information Profiles

A Pesticide Information Project of Cooperative Extension Offices of Cornell University, Oregon State University, the University of Idaho, and the University of California at Davis and the Institute for Environmental Toxicology, Michigan State University. Major support and funding was provided by the USDA/Extension Service/National Agricultural Pesticide Impact Assessment Program.

EXTOXNET primary files maintained and archived at Oregon State University

CHLOROPICRIN

TRADE OR OTHER NAMES: Some trade names for products containing chloropicrin include "Chlor-O-Pic," "Metapicrin" "Timberfume" and "Tri-Clor." A partial list of trade names for chloropicrin mixtures with methyl bromide includes "Tri-Con," "Terr-O-Gas," "Preplant Soil Fumigant" and "Pic-Brom." Chloropicrin mixtures with 1,3-Dichloropropene include "Telone C-17," "Tri-Form" and "Pic-Clor."

REGULATORY STATUS: Chloropicrin is currently undergoing USEPA FIFRA reregistration. It is a Class I toxicity, Restricted Use Pesticide (RUP), labeled with the signal word "Danger" (231). The U.S. Department of Transportation (DOT) proper shipping name is "Chloropicrin, 6.1, UN 1580, PGI, Poison Inhalation Hazard, Hazard Zone B." The Emergency Response Guide (ERG) number is 56. NFPA designations are 4-Health, 0-Fire, 3-Reactivity. Chloropicrin is not listed under the EPA Clean Air Act, EPA Clean Water Act or the EPA Marine Pollutant List (258). A tolerance is not required for preplant soil fumigation uses of chloropicrin.

INTRODUCTION: Chloropicrin is a clear, colorless, oily liquid with a strong, sharp, highly irritating odor. It is a strong lachrymator (231). Chloropicrin has been used as an insecticide since 1917 and as a soil fumigant since 1920 (259). The primary use today is for preplant soil fumigation to control soil borne fungi, diseases and nematodes (231). It also is used to treat wood poles and timbers for internal decay by fungi and insects; as a warning/clearing agent for sulfuryl fluoride (structural fumigant) and methyl bromide (soil and structural fumigant); and is also used in organic synthesis. For soil fumigation and wood treatment, chloropicrin is packaged in DOT 4BW240 steel cylinders and bulk tanks which may be pressurized. When used as a warning agent for methyl bromide, chloropicrin is packaged along with the methyl bromide in steel cylinders. When used as a structural fumigation warning agent for sulfuryl fluoride, chloropicrin is packaged in small plastic bottles in DOT approved overpacks. Chloropicrin has a moderate vapor pressure (18.3 mmHg at 20 degrees C) and exists as a liquid at room temperature. Chloropicrin/methyl bromide mixtures will volatilize readily upon opening of the cylinder valve. Materials incompatible with chloropicrin are PVC, fiberglass, aluminum and magnesium and their alloys (231,260).

TOXICOLOGICAL EFFECTS

- **Acute Toxicity:** Undiluted chloropicrin is highly toxic by ingestion or direct contact with the skin or eyes. According to the American Conference of Governmental Industrial Hygienists (261), airborne

exposure to 0.3-0.37 ppm (2-2.5 mg/meters cubed) for 3-30 seconds results in eye irritation. This response is reported to be highly variable among individuals and tearing (lachrymation) may occur at airborne exposures of 0.15-0.3 ppm (1-2 mg/meters cubed) (261). Inhalation exposure to 4 ppm (26 mg/meters cubed) for a few seconds may cause some degree of incapacitation (261) and an exposure of a few seconds to 15 ppm (100 mg/meters cubed) can cause injury to the respiratory track. Exposure to concentrations above 15 ppm can result in lacrimation, vomiting, and if allowed to continue for a minute or longer, can cause pulmonary edema and possibly death (261). The American Industrial Hygiene Association Emergency Response Planning Guideline for one hour exposure to chloropicrin is 3 ppm (20 mg/meters cubed)(262). Animal studies established that the 4-hour inhalation LC50 for chloropicrin vapor in rats is 11.9 ppm (79.7 mg/meters cubed)(293) and the respiratory irritation potential threshold (RD50) in mice is 7.98 ppm (53.5 mg/meters cubed)(293). The FIFRA Toxicity Classification for chloropicrin acute effects is Category I and the signal word for that classification is "Danger."

- **Signs and Symptoms of Poisoning:** Undiluted chloropicrin is severely and immediately irritating to the upper respiratory tract, eyes and skin upon direct contact. Exposure to airborne concentrations of chloropicrin exceeding 0.15 ppm (1 mg/meters cubed) can cause tearing and eye irritation which is reversible upon termination of exposure. Prolonged inhalation exposures at airborne concentrations above 1 ppm may cause symptoms of respiratory system damage including irritation of the airways, shortness of breath and/or tightness in chest and difficulty in breathing. Inhalation exposure to very high levels, even if brief, can lead to pulmonary edema, unconsciousness and even death.
- **Chronic Toxicity/Subchronic Effects:** Studies with male and female CD rats and CD-1 mice exposed to chloropicrin vapor in whole body inhalation chambers at concentrations of 0.3, 1.0, or 3.0 ppm for six hours per day, five days per week for thirteen weeks (263) and male Fisher 344 rats exposed to chloropicrin (264) indicated that respiratory tissue is the target for chloropicrin inhalation toxicity. Portal-of-entry effects occurred in the upper respiratory tissue of animals inhaling chloropicrin vapor for 90 days at concentrations at or above 0.1 ppm (0.67 mg/meters cubed).
- **Reproductive Effects:** A study utilizing chloropicrin vapor administered by whole body inhalation for six hours per day, seven days per week to male and female CD rats at concentrations of 0.5, 1.0, or 1.5 ppm through two generations of animals indicated that reproduction fitness is not adversely affected by chloropicrin inhalation even at systemically toxic levels (265). The No Observable Adverse Effect Level (NOAEL) was 1.0 ppm for systemic toxicity and greater than 1.5 ppm for developmental toxicity and reproductive parameters.
- **Teratogenic Effects:** In a study with sexually mature virgin female Sprague-Dawley rats exposed by whole body inhalation to chloropicrin vapor for six hours per day for days 6-15 of gestation, there were no treatment-related fetal malformations (266). The incidence of developmental variations in the mid- and high-dose groups increased over the control group and was statistically significant in the high-dose group. The NOAEL for maternal toxicity was 0.4 ppm and the NOAEL for fetal toxicity was 1.2 ppm indicating that the developing fetus is not a target tissue for chloropicrin. The developmental toxicity of chloro-picrin in sexually mature virgin female New Zealand White SPF rabbits was evaluated by whole body exposure/inhalation to chloropicrin vapor for six hours per day for days 7-20 of gestation (267). There were no treatment related fetal malformations reported, the incidence of developmental variations in the mid- and high-dose groups was increased over the control group and was considered to be treatment related but was not dose related nor was it statistically significant. The NOAEL for maternal toxicity was 0.4 ppm and the NOAEL for fetal toxicity was 1.2 ppm indicating that the developing fetus is not a target tissue.
- **Mutagenic Effects:** Chloropicrin has been evaluated in several in vitro genetic toxicity test systems (268, 271). Bacterial cell testing for gene mutation produced some evidence of genetic toxicity in one of five tester strains in the presence of an exogenous metabolic activation system but testing in higher order cells (mammalian cells) did not confirm the potential for chloropicrin to produce gene mutation. Chloropicrin did not cause damage to mammalian cell DNA. In vitro testing of

mammalian cell chromosomes for damage (breaks, exchange figures, fragments, etc.) produced evidence suggestive of a clastogenic effect but the data were equivocal.

- **Carcinogenic Effects:** Six long-term bioassays have been performed to evaluate the potential of chloropicrin to cause chronic and/or carcinogenic effects by inhalation, oral, and gavage dosing (272, 276). Chronic toxicity was limited to inflammatory and other degenerative changes associated with chronic wound healing at the portal-of-entry and at associated tissues (i.e. rodent forestomach following life-long oral dosing). No neoplastic or tumorigenic response was produced by chloropicrin in any species tested by the three routes of exposure.
- **Organ Toxicity:** Target organs for chloropicrin toxicity include eyes, skin, respiratory tract and tissue associated with portal-of-entry into the body.
- **Fate in Mammals:** The octanol/water partition coefficient (Log₁₀ K_{ow}) is 2.50 at 25 degrees C indicating that chloropicrin would not be expected to bioaccumulate in mammalian cells (277).

ECOLOGICAL EFFECTS

- **Effects on Birds:** Little information is available about the effects of chloropicrin on bird life. A feeding study in chickens (278) demonstrated no adverse effects at doses as high as 100 ppm for 120 days. This was the highest dose tested.
- **Effects on Aquatic Organisms:** Chloropicrin is toxic to fish. For trout and bluegill the 96-hour LC₅₀ was 0.0165 mg/L and 0.105 mg/L respectively (278).
- **Effects on Other Animals (Nontarget species):** When used according to label, exposure to nontarget species is unlikely. However, because of its toxicity to mammals and invertebrates, it can be assumed that chloropicrin may be harmful to many nontarget organisms.

ENVIRONMENTAL FATE

- **Breakdown of Chemical in Soil and Groundwater:** The half-life of chloropicrin in sandy loam soil was 8-24 hours (279) and 4.5 days (280) with carbon dioxide being the terminal breakdown product (280). Chloropicrin moves rapidly in soils within twelve inches of injection but may diffuse to a maximum depth of four feet in sandy soil (281). Since it is only slightly soluble in water, it will not move rapidly in aquatic environments. In an anaerobic aquatic/soil system, chloropicrin was converted to nitromethane with a half-life of 1.3 hours (282). In the absence of sunlight or microorganisms, chloropicrin does not undergo hydrolysis (283, 284). The calculated Henry's Law Constant is 2.51×10^{-3} atm meters cubed mole⁻¹ (285). The K_{oc} for silt loam and agricultural sand soils was 5.29 and 93.59 respectively (289). Chloropicrin can be produced during chlorination of drinking water if nitrated organic contaminants are present (286, 287). In a sampling of 1,386 wells in California between 1984 and 1989, no chloropicrin was detected (288). In a sampling of 15,175 wells in Florida, chloropicrin was found in three wells at 0.035-0.068 Hg/L (288).
- **Breakdown of Chemical in Surface Water:** Since chloropicrin has a higher density than water (1.65 g/ml) and is only slightly soluble, it will sink to the bottom of surface water. The half-life of chloropicrin in water exposed to light was 31.1 hours with carbon dioxide, bicarbonate, chloride, nitrate and nitrite being the breakdown products (284).
- **Breakdown of Chemical in Plants:** No chloropicrin or nitromethane was detected in crops grown in soil treated with radiolabelled chloropicrin (290). Carbon dioxide, as the terminal breakdown product, was metabolized by plants and incorporated into natural plant biochemical compounds via the single carbon pool (291).
- **Breakdown of Chemical in Air:** Chloropicrin is efficiently photolyzed in the atmosphere. The half-life of chloropicrin in air exposed to simulated sunlight was 20 days (292). The photoproducts were phosgene (which will hydrolyze to carbon dioxide and hydrogen chloride), nitric oxide,

chlorine, nitrogen dioxide and dinitrogen tetroxide.

- **Analytical Methods:** The concentration of chloropicrin in air may be measured using Kitagawa direct reading gas detector tube #172 (Matheson-Kitagawa, East Rutherford, NJ). Gas chromatography methods are available to measure chloropicrin in air (283) and may utilize XAD-4 solid sorbent tubes (SKC Inc., Eighty Four, PA).

PHYSICAL PROPERTIES AND GUIDELINES

Physical Properties:

- **Appearance:** Heavy, colorless, liquid with a sharp odor
- **Chemical Names:** Trichloronitromethane; Methane, trichloronitro; Nitrotrichloro-methane, Nitrochloroform
- **CAS Number:** 76-06-2
- **Molecular Weight:** 164.38
- **Water Solubility:** 1.6 g/L @ 25 degrees C
- **Solubility in Other Solvents:** Miscible in most organic solvents
- **Melting Point:** -64 degrees C
- **Vapor Pressure:** 18.3 mmHg @ 20 degrees C, 24 mmHg @ 25 degrees C
- **Partition Coefficient:** Not Available
- **Adsorption Coefficient:** Not Available

Exposure Guidelines:

- **ADI:** Not Available
- **MCL:** Not Available
- **RfD:** Not Available
- **PEL:** 0.1 ppm
- **HA:** Not Available
- **TLV:** 0.1 ppm TWA

BASIC MANUFACTURERS

Niklor Chemical Corp.
2060 E. 220th Street
Long Beach, CA 90810

REFERENCES:

References for the information in this PIP can be found in Reference List Number 10

DISCLAIMER: The information in this profile does not in any way replace or supersede the information on the pesticide product label/ing or other regulatory requirements. Please refer to the pesticide product label/ing.

EXTOXNET

Extension Toxicology Network

Pesticide Information Profiles

A Pesticide Information Project of Cooperative Extension Offices of Cornell University, Oregon State University, the University of Idaho, and the University of California at Davis and the Institute for Environmental Toxicology, Michigan State University. Major support and funding was provided by the USDA/Extension Service/National Agricultural Pesticide Impact Assessment Program.

EXTOXNET primary files maintained and archived at Oregon State University

Revised June 1996

Methyl bromide; Bromomethane

Tradenames: Trade or common names of methyl bromide containing products include: Brom-o-Gas, Bromomethane, Celfume, Embafume, Haltox, MB, MeBr, Methogas, Profume, Terr-o-Gas, and Zyttox.

Regulatory Status: Methyl bromide is a highly toxic compound in EPA Toxicity Class I. Labels for products containing it must bear the Signal Word DANGER. Methyl bromide is a Restricted Use Pesticide (RUP). RUPs may be purchased and used only by certified applicators.

EPA has expressed concerns and proposed restrictions on methyl bromide due to concerns over its potential to destroy ozone. Ozone-depleting chemicals fall within the scope of the Clean Air Act. Unlike FIFRA, the Clean Air Act does not contain a risk/benefit balancing process that would allow retention of essential or high benefit uses, nor does the listing and phase-out of ozone depleters depend on the availability of alternative products.

Chemical Class: Not Available

Introduction: Methyl bromide is chiefly used as a gas soil fumigant against insects, termites, rodents, weeds, nematodes, and soil-borne diseases. It has been used to fumigate agricultural commodities, grain elevators, mills, ships, clothes, furniture, and greenhouses. About 70% of methyl bromide produced in the U.S. goes into pesticidal formulations.

Formulation: Methyl bromide is chiefly used as a gas soil fumigant against insects, termites, rodents, weeds, nematodes, and soil-borne diseases.

Toxicological Effects:

- **Acute toxicity:** Since bromomethane is a gas at ambient temperatures, the most significant route of

exposure is inhalation [188]. The reported 1-hour inhalation LC50 in rats is 4.5 mg/L, and the 11-hour LC50 in rabbits is 8 mg/L [8]. Inhalation of 6 mg/L for 10 to 20 hours, or 30 mg/L for 1.5 hours is lethal to humans [8]. The compound is readily absorbed through the lung alveoli (gas exchange regions). Methyl bromide can be highly irritating to the mucous membranes of the eyes, airways, and skin with contact [17]. About 1000 human poisoning incidents caused by methyl bromide exposure have been documented, with effects ranging from skin and eye irritation to death [17]. Most fatalities and injuries occurred when methyl bromide was used as a fumigant. The lowest inhalation level found to cause toxicity in humans is 0.14 mg/L in air [17]. A typical delay in onset of symptoms following exposure combined with an odor threshold (level at which most people can smell it) well-above the level at which toxic effects occur, means that the victim may not realize a harmful exposure is occurring until it is too late [17]. Initial acute effects may include headache, dizziness, nausea or vomiting, chest and abdominal pain, and irritated eyes, nose, and throat [188]. With sufficient exposure, symptoms of slurred speech, blurred vision, temporary blindness, mental confusion, and sweating may occur [188]. More severe symptoms at even higher doses may include lung swelling; congestion; hemorrhaging of the brain, heart, and spleen; severe kidney damage; and numbness, tremors, and convulsions [188]. The nervous effects observed in lab animals included degeneration of key nerve cells in various portions of the brain and peripheral nervous system [188]. Death may occur from respiratory failure [188]. The rat oral LD50 (bromomethane administered as a liquid, or in solution) is 214 mg/kg [1], also indicating moderate to high toxicity.

- **Chronic toxicity:** Chronic exposure to methyl bromide can cause extensive damage to neurons (nerve cells) involved in cognitive processes and physical coordination or muscular control [188]. These effects were seen in rats exposed to 0.51 to 1.3 mg/L 6 hours per day for 5 days [188]. Rats exposed to 65 ppm over 4 weeks for an average of 7 hours per day for 4 to 5 days did not show neurological effects, but this level of exposure did result in severe, in some cases irreversible, neurological effects in rabbits over a similar time period [188]. Exposure levels of 0.1 mg/L over 8 months (7.5 hours per day, 4 days/week) did not produce observable neurotoxicity [188]. The symptoms of chronic exposure may include dizziness, vision and hearing disturbances, depression, confusion, hallucinations, euphoria, personality changes, and irritability [8]. A chronic pneumonia-like syndrome may become apparent after repeated exposure to sufficient levels [8]. Other targets of the fumigant identified through long-term animal studies are the heart, adrenal gland, and the testis [189].
- **Reproductive effects:** No reproductive effects were seen in rats exposed to up to 0.3 mg/L for 7 hours/day, 5 days a week, for 3 weeks prior to mating and during gestation [188]. This suggests that methyl bromide does not cause reproductive effects.
- **Teratogenic effects:** No teratogenic effects were seen in rats exposed to up to 0.3 mg/L for 7 hours/day, 5 days a week, for 3 weeks prior to mating and during gestation [188]. This evidence indicates that bromomethane is unlikely to cause teratogenic effects.
- **Mutagenic effects:** Mutagenic effects were seen in mouse cell cultures, mutagenicity assays with bacteria, and in human white blood cells [190]. Rat liver cells did not display increased rates of mutation after exposure to methyl bromide [190]. Methyl bromide is considered to be weakly mutagenic [188].
- **Carcinogenic effects:** In one study of industrial workers exposed to various brominated compounds, exposure to methyl bromide was suggested as the possible common factor in two fatal cases of testicular cancer, but other exposures could not be ruled out [189]. In a rat study, methyl bromide given at 50 mg/kg/day by stomach tube for 90 days (gavage) induced stomach tumor increases [188,190]. It appeared that the cancerous growth was due to severe localized cellular injury, with subsequent increased cell reproduction to repair tissue damage amplifying the natural incidence of mutant or abnormal cells [188]. This is not likely to occur at low doses. Thus, the data are inconclusive.
- **Organ toxicity:** Acute exposure primarily damages the lung and results in nervous system effects;

chronic exposure may cause damage to the central nervous system, kidneys, and lungs. Other targets of the fumigant are the heart, nasal cavities, adrenal gland, and the testis.

- **Fate in humans and animals:** The major route of absorption of methyl bromide vapors is through the lungs [188]. Some of the compound is excreted through the lungs as unchanged methyl bromide, but a significant amount also undergoes metabolic decomposition [32]. The primary breakdown products are the bromide ion and methanol, which are detectable in the blood and tissues and are excreted in the urine [32]. Organic bromides (formed by reaction of bromide ion with molecular carbon centers in biomolecules) also appear in stomach fluids and mucus. In humans, methyl bromide's half-life in blood is about 12 days [32]. As a result, the toxic effects of methyl bromide can be delayed or prolonged [32]. Additionally, once in a cell, this chemical inactivates many enzyme systems, so prolonged small doses can cause severe toxicity [32].

Ecological Effects:

- **Effects on birds:** Bromomethane is most likely to be in vapor form, and unless birds are in the fumigation area, during the fumigation, they are unlikely to be exposed .
- **Effects on aquatic organisms:** Methyl bromide is moderately toxic to aquatic organisms. Acute toxicity in freshwater fish (bluegill sunfish) occurs at concentrations of 11 mg/L and in saltwater fish (tidewater silversides) at about 12 mg/L [8].
- **Effects on other organisms:** It is not toxic to bees [1].

Environmental Fate:

- **Breakdown in soil and groundwater:** Methyl bromide quickly evaporates at temperatures ordinarily encountered in fumigating, but some may be entrapped in soil micropores following application [11]. Methyl bromide is moderately persistent in the soil environment, with a field half-life of between 30 and 60 days; a representative half-life is estimated to be about 55 days [11]. Transformation of methyl bromide into bromide increases as the amount of organic matter in the soil increases. It is soluble in water and very poorly sorbed by soils. Some leaching may occur if bromomethane is entrapped in soil micropores following fumigation; the rate of degradation for retained bromomethane in fumigated soil is 6 to 14% per day at 20 C [11].
- **Breakdown in water:** Methyl bromide quickly evaporates at temperatures ordinarily encountered in fumigating; therefore run-off from fields into surface waters is very rare. If it does contact surface waters, the average half-life for methyl bromide under field conditions has been calculated to be 6.6 hours at 11 C [8]. Another study showed the half-life in water to be 20 days at 25 C in a neutral solution [8].
- **Breakdown in vegetation:** The amount of bromide ion (the metabolite of methyl bromide) taken up from the soil, is proportional to the protein content of the crop. Higher levels of the bromide ion will most likely be found in high-protein plants [8].

Physical Properties:

- **Appearance:** Methyl bromide is a colorless gas or volatile liquid which is usually odorless, but has a sweet, chloroform-like odor at high concentrations [1].
- **Chemical Name:** bromomethane [1]
- **CAS Number:** 74-83-9
- **Molecular Weight:** 94.94
- **Water Solubility:** 13,400 mg/L at 25 C [1]

- **Solubility in Other Solvents:** easily miscible with ethanol, ether, aromatic carbon disulfide, and ketones [1]
- **Melting Point:** -93.6 C [1]
- **Vapor Pressure:** 227,000,000 mPa @ 25 C [1]
- **Partition Coefficient:** Not Available
- **Adsorption Coefficient:** 22 [11]

Exposure Guidelines:

- **ADI:** 1.0 mg/kg/day (as bromide ion) [12]
- **MCL:** Not Available
- **RfD:** 0.0014 mg/kg/day [13]
- **PEL:** 80 mg/m³ (ceiling) [14]
- **HA:** Not Available
- **TLV:** Not Available

Basic Manufacturer:

Great Lakes Chemical Corporation
One Great Lakes Blvd.
P.O. Box 2200
West Lafayette, IN 47906

- **Phone:** 317-497-6204
- **Emergency:** 501-862-5141

References:

References for the information in this PIP can be found in Reference List Number 10

DISCLAIMER: The information in this profile does not in any way replace or supersede the information on the pesticide product labeling or other regulatory requirements. Please refer to the pesticide product labeling.

Attachment VI

Memorandum
"Protocol Changes for Chloropicrin Application-site Monitoring"



Paul Helliker
Director

Department of Pesticide Regulation



Gray Davis
Governor

Winston H. Hickox
Secretary, California
Environmental
Protection Agency

MEMORANDUM

TO: Jeffrey P. Cook, Chief
Quality Management Branch
Air Resources Board
P.O. Box 2815
Sacramento, California 95812

FROM: John S. Sanders, Ph.D., Chief 
Environmental Monitoring Branch
(916) 324-4100

DATE: October 31, 2003

SUBJECT: PROTOCOL CHANGES FOR CHLOROPICRIN APPLICATION-SITE
MONITORING

The Department of Pesticide Regulation (DPR) recommends changing the Draft Protocol for the upcoming Chloropicrin Study concerning the location of samplers and the sampling duration for the background-sample period. DPR believes these changes will better meet the data collection requirements of the Protocol, and still provide adequate safety for sampling staff.

Previous application-site monitoring for chloropicrin did not achieve the study objective because the samplers were located too far from the treated field. The study objective is to determine the maximum acute chloropicrin exposure to people working or living near an application of methyl bromide and chloropicrin. To achieve this objective, samplers should be placed as close as the general public would have access to a large application. During the previous application-site monitoring, samplers were placed at a distance assuming the entire field would be treated in a single day. Instead, the field was treated over a 3-day period and samplers were located further than people might work or live. Chloropicrin air concentrations detected at the sampled distances were unlikely to meet the criteria for listing as a toxic air contaminant.

DPR recommends that the samplers be placed at the inner buffer zone. Samplers placed at the inner buffer zone distance will more likely give useful results even if a smaller area is treated than originally planned. In addition, the field chosen for monitoring is being treated in sections over several weeks. Samplers will be near or in sections treated several days earlier. Background concentrations from the previously treated areas may confound the results. Placing samplers closer to the monitored section will decrease the effect of the background concentrations.

Entry into the buffer zones is governed by pesticide regulations. Exposure to sampling personnel at the inner buffer zone will still be less than allowed for the general public. At the outer buffer zone distance there are no restrictions and it provides maximum protection. The general public is allowed at the outer buffer zone distance for 24 hours/day. Activity at the inner buffer zone distance is limited to 12 hours/day and requires prior approval by the county agricultural commissioner. With the county agricultural commissioner's approval, the general public may

Jeffrey P. Cook
October 31, 2003
Page 2

occupy the inner buffer zone distance for 12 hours/day per all applicable regulations. Sampling personnel are likely to spend no more than two to three hours per day at the inner buffer zone distance changing sample tubes, less than the 12 hours allowed.

DPR agreed to placing the samplers at the outer buffer zone distance for the previous study assuming that the study objectives could still be achieved and provide maximum protection to field staff. Results of the previous application and circumstances of the current application make it unlikely that the study objectives can be achieved if the samplers are placed at the outer buffer zone. The changes DPR proposes greatly increases the chances for a successful study and still provides adequate protection for field staff.

A related issue is the background samples. The registrants have great concerns about monitoring this application due to the possibility of background concentrations overestimating exposures. They suggest, and DPR agrees, that the 24-hour background samples should be collected in two, 12-hour sampling intervals.

Thank you for considering this request. If you have any questions, please contact me or Randy Segawa, of my staff, at (916) 324-4137 or <rsegawa@cdpr.ca.gov>.

cc: Randy Segawa
Ken Stroud, Air Resources Board
Dennis Goodenow, Air Resources Board
Webster Tasat, Air Resources Board
Lynn Baker, Air Resources Board

APPENDIX II
LABORATORY REPORT

California Environmental Protection Agency

Air Resources Board

**Trichloronitromethane (Chloropicrin) Analytical Results for Agricultural
Application Air Monitoring Samples in Santa Cruz County
November 2003**

DATE: November 2004

**Prepared by
Michael Orbanosky
Air Pollution Specialist**

**Special Analysis Section
Northern Laboratory Branch
Monitoring and Laboratory Division**

Reviewed and Approved by

**Russell Grace, Manager
Special Analysis Section**

**Project Number: P-03-1
Revision 1.0**

This report has been reviewed by staff of the California Air Resources Board and approved for publication. Approval does not signify that the contents necessarily reflect the views and policies of the Air Resources Board, nor does mention of trade names of commercial products constitute endorsement or recommendation for use.

Table of Contents

1.0 INTRODUCTION	1
2.0 METHOD DEVELOPMENT	1
2.1 OVERVIEW	1
2.2 CALIBRATION CURVE	1
2.3 METHOD DETECTION LIMIT (MDL)	1
2.4 METHOD DEVELOPMENT	2
3.0 CHLOROPICRIN APPLICATION AIR MONITORING SAMPLE RESULTS.	2
4.0 ANALYTICAL QUALITY CONTROL SAMPLES	2
4.1 SYSTEM BLANKS	2
4.2 METHOD BLANKS	2
4.3 LABORATORY CONTROL SAMPLES (LCS)	3
4.4 CONTINUING CALIBRATION VERIFICATION STANDARDS (CCV)	3
4.5 LABORATORY DUPLICATES	3
5.0 FIELD, TRIP, AND LABORATORY SPIKES AND TRIP BLANKS	3
5.1 LABORATORY SPIKES	3
5.2 TRIP SPIKES	3
5.3 FIELD SPIKES	3
5.4 TRIP BLANKS	4
6.0 DISCUSSION	4
TABLE 1: AGRICULTURAL APPLICATION AIR MONITORING RESULTS FOR CHLOROPICRIN	5
TABLE 2: FIELD QC SAMPLE RESULTS	8

1.0 INTRODUCTION

The Department of Pesticide Regulation (DPR) requested the Air Resources Board (ARB) to conduct application air monitoring for trichloronitromethane (chloropicrin). This report covers the analytical and quality assurance results for a chloropicrin agricultural application occurring over a four (4) day period in Santa Cruz County in November 2003. DPR requested a method estimated quantitation limit (EQL) of 0.1 $\mu\text{g}/\text{m}^3$. The analytical EQL achieved during this project was 0.14 $\mu\text{g}/\text{m}^3$.

2.0 METHOD DEVELOPMENT

2.1 Overview

XAD-4 cartridges are used for application air sampling. After sampling, cartridges are stored at or below four (4) degrees centigrade ($^{\circ}\text{C}$) before extraction. Sample cartridges are extracted with three (3) milliliters (ml) of methylene chloride (DCM) and desorbed in an ultrasonic bath. Sample extracts are analyzed using a gas chromatograph/mass selective detector (GC/MSD), which is operated in the selected ion-monitoring mode (SIM). Sample analysis and quantitation used the external standard method. The estimated quantitation level for this method, based on 0.144 cubic meters (m^3) of air collected, and a final extract volume of three (3) ml, is 0.14 $\mu\text{g}/\text{m}^3$.

2.2 Calibration Curve

Laboratory staff used standard concentrations of approximately 5, 10, 20, 50, 100, and 150 ng/ml to produce a six (6) point calibration curve. All calibration curves performed had a r^2 (coefficient of determination) greater than or equal to 0.995. Laboratory staff performed calibrations at the beginning of the monitoring program, after instrument maintenance, after remaking of external standard, and whenever the continuing calibration verification standard (CCV) did not fall within ± 20 percent (%) of the expected value.

2.3 Method Detection Limit (MDL)

The MDL calculation follows the United States Environmental Protection Agency procedures for calculating MDL's. Using the analysis of seven low-level matrix spikes (5.0 ng/ml), the MDL and EQL for a three (3) ml extract is calculated as follows:

s = the standard deviation of the concentration calculated for the seven replicate spikes.
For Chloropicrin: $s = 0.4204 \text{ ng/ml}$

$$\text{MDL} = (3.14) \times (s) = (3.14) \times (0.4204) = 1.32 \text{ ng/ml.}$$

$$\text{EQL} = (5) \times (\text{MDL}) = (5) \times (1.32) = 6.60 \text{ ng/ml}$$

$$\text{EQL for total ng/sample} = 19.80 \text{ ng/sample}^*$$

* assuming a 3 ml final extract volume

Based on a total collection volume of 0.144 m^3 the EQL would be $0.14 \mu\text{g}/\text{m}^3$. Staff report results at or above the EQL to three (3) significant figures. Results below the EQL but greater than or equal to the MDL are reported as detected (DET). Results less than MDL are reported as <MDL.

2.4 Method Development

Instrument reproducibility, collection and extraction efficiency, storage stability and breakthrough studies were performed and reported in the document "Air Sampling Cartridge Method Development and Analysis Results for Application Monitoring of Trichloronitromethane (Chloropicrin)", 2002. No additional method development was required for this application project.

3.0 CHLOROPICRIN APPLICATION AIR MONITORING SAMPLE RESULTS.

The laboratory received 62 application samples plus four (4) field spikes, one (1) trip blank, and one (1) trip spike on November 16, 2003. Table 1 presents the results of the analysis of the chloropicrin agricultural application air samples by sampler location.

4.0 ANALYTICAL QUALITY CONTROL SAMPLES

4.1 System Blanks

Laboratory staff analyzes a system blank with each analytical batch, after each CCV, after every tenth sample and after samples containing high levels of chloropicrin or co-extracted contaminants. Staff defines the analytical batch as all the samples extracted together, but not to exceed twenty (20) samples. The system blank is run to insure the solvent and instrument do not contribute interferences to the analysis, and to minimize carryover from high level samples. All system blanks were less than the MDL.

4.2 Method Blanks

Laboratory staff analyzed a method blank with each analytical batch. This is an XAD-4 cartridge prepared and analyzed as described for the application samples. Laboratory staff analyzed eight (8) method blanks during this project. All method blank results were less than the MDL.

4.3 *Laboratory Control Samples (LCS)*

Laboratory staff analyzed a LCS with each analytical batch. A LCS is an XAD-4 cartridge spiked with 100 ng of chloropicrin. The stock standard used to prepare the LCS comes from a different lot number than the stock standard used for method calibration. The LCS is extracted and analyzed as described for the samples. The LCS recoveries averaged 93.4% with a standard deviation of 6.91%.

4.4 *Continuing Calibration Verification Standards (CCV)*

Following standard lab procedures, laboratory staff analyzed a CCV after every calibration curve, after every tenth (10) sample and at the end of an analytical batch. The CCV must be within $\pm 20\%$ of the expected value. If any of the CCVs are outside this limit, the affected samples are re-analyzed. The CCV target value for this project was 20 ng/ml. All CCV's were within $\pm 20\%$ of the expected value.

4.5 *Laboratory Duplicates*

No laboratory duplicates were run with this project.

5.0 FIELD, TRIP, AND LABORATORY SPIKES AND TRIP BLANKS

During the agricultural application project, one (1) trip and (4) field spikes along with six (6) laboratory spikes and one (1) trip blank were analyzed. Laboratory staff prepared all spikes at 100 ng/sample of chloropicrin

5.1 *Laboratory Spikes*

Table 2 presents the results of the laboratory spikes. The average chloropicrin recovery was 95.2% with a standard deviation of 8.11%.

5.2 *Trip Spikes*

Table 2 presents the results of the trip spike. The trip spike recovery for chloropicrin was 104%.

5.3 *Field Spikes*

Four field spikes were analyzed during this application study. The range of chloropicrin detected was 476 to 15300 ng/sample. The four collocated non-spiked samples had chloropicrin results ranging from 390 to 17300 ng/sample. The field spike samples were spiked with 100 ng/sample. Because this spike level represented less than 1% of the total for two of the spikes the percent recoveries were not calculated. For the two samples having levels less than 1000 ng/sample the spike recoveries were 95.6% and

85.9% averaging 90.7%. The uncorrected sample results are given in Table 2.

5.4 Trip Blanks

Table 2 presents the results of the trip blanks. One (1) trip blank, with result less than the MDL, was received during this project.

6.0 DISCUSSION

During the project, 62 application samples were analyzed. Sixty-one (61) samples had results greater than the EQL of 19.8 ng/sample. The concentrations ranged from 43.59 to 17300 ng/sample. One (1) sample (sample 34) had results reported as detected. Several cartridges arrived with water in the XAD-4 cartridges. Because the water has a low level of solubility in MeCl₂, the sample extracts were dried with anhydrous sodium sulfate before instrumental analysis.

After initial analysis, 58 samples had results above the high calibration point. These samples were diluted and the results reported in Table 1. In addition to the analysis of the front cartridge section, the back sections of samples with log numbers 1, 2, 7 and 8 were analyzed to evaluate potential analyte breakthrough. The range of concentrations for the initial analyses was 11,000 to 17,300 ng/sample. All back section results were less than the MDL. Consequently, no other back sections from the subsequent sample extracts were analyzed.

LCS spiked at 100 ng/sample and processed in the same way as field samples had recoveries that averaged 94.0% with a standard deviation of 6.91%. Based on three (3) standard deviations from the mean, the acceptable recovery range was 73.2% to 115%. All LCS results fell within this range.

Table 1: Agricultural Application Air Monitoring Results for Chloropicrin

Site	Log Number	Sample ID	Date Received	Date Analyzed	Chloropicrin amount (µg/sample)
E	15	E-C-1	11/16/03	11/21/03	2.24E+00
	32	E-C-2	11/16/03	12/4/03	8.52E+00
	41	E-C-3	11/16/03	12/9/03	2.42E+00
	50	E-C-4	11/16/03	12/9/03	2.26E+00
	59	E-C-5	11/16/03	12/10/03	1.63E+00
	68	E-C-6	11/16/03	12/10/03	3.21E+00

NC	21	NC-C-1	11/16/03	11/21/03	1.18E+00
	29	NC-C-2	11/16/03	12/4/03	4.50E+00
	38	NC-C-3	11/16/03	12/9/03	2.16E+00
	47	NC-C-4	11/16/03	12/9/03	2.01E+00
	56	NC-C-5	11/16/03	12/10/03	1.28E+00
	65	NC-C-6	11/16/03	12/4/03	2.70E-01

NE	7	NE-C-B1	11/16/03	11/18/03	1.73E+01
	7B	NE-C-B1	11/16/03	11/19/03	<MDL
	14	NE-C-B2	11/16/03	11/21/03	1.67E+01
	22	NE-C-1	11/16/03	11/21/03	3.79E+00
	23	NE-C-1C	11/16/03	11/21/03	3.61E+00
	30	NE-C-2	11/16/03	12/4/03	1.02E+01
	31	NE-C-2C	11/16/03	12/4/03	8.84E+00
	39	NE-C-3	11/16/03	12/9/03	5.76E+00
	40	NE-C-3C	11/16/03	12/9/03	5.45E+00
	48	NE-C-4	11/16/03	12/9/03	6.35E+00
	49	NE-C-4C	11/16/03	12/9/03	5.23E+00
	57	NE-C-5	11/16/03	12/10/03	3.74E+00
	58	NE-C-5C	11/16/03	12/10/03	3.57E+00
	66	NE-C-6	11/16/03	12/10/03	3.79E+00
67	NE-C-6C	11/16/03	12/10/03	3.58E+00	

Table 1: Agricultural Application Air Monitoring Results for Chloropicrin

Site	Log Number	Sample ID	Date Received	Date Analyzed	Chloropicrin amount (µg/sample)
NW	5	NW-C-B1	11/16/03	11/18/03	3.91E-01
	13	NW-C-B2	11/16/03	11/21/03	1.45E+00
	20	NW-C-1	11/16/03	11/20/03	1.96E-01
	28	NW-C-2	11/16/03	12/4/03	1.33E+01
	37	NW-C-3	11/16/03	12/9/03	2.91E+00
	46	NW-C-4	11/16/03	12/9/03	3.79E+00
	55	NW-C-5	11/16/03	12/9/03	1.54E+00
	64	NW-C-6	11/16/03	12/10/03	7.51E-01

SC	17	SC-C-1	11/16/03	11/20/03	1.31E-01
	25	SC-C-2	11/16/03	12/3/03	7.59E+00
	34	SC-C-3	11/16/03	12/3/03	DET
	43	SC-C-4	11/16/03	12/9/03	9.61E-01
	52	SC-C-5	11/16/03	12/4/03	2.48E-01
	61	SC-C-6	11/16/03	12/10/03	2.65E+00

SE	1	SE-C-B1	11/16/03	11/18/03	1.10E+01
	1B	SE-C-B1	11/16/03	11/18/03	<MDL
	11	SE-C-B2	11/16/03	11/21/03	8.30E+00
	16	SE-C-1	11/16/03	11/21/03	3.48E+00
	24	SE-C-2	11/16/03	12/3/03	1.37E+01
	33	SE-C-3	11/16/03	12/9/03	1.58E+00
	42	SE-C-4	11/16/03	12/9/03	3.69E+00
	51	SE-C-5	11/16/03	12/9/03	1.44E+00
	60	SE-C-6	11/16/03	12/10/03	3.29E+00

SW	3	SW-C-B1	11/16/03	11/17/03	7.31E-01
	12	SW-C-B2	11/16/03	11/21/03	1.63E+00
	18	SW-C-1	11/16/03	11/20/03	8.87E-02
	26	SW-C-2	11/16/03	12/3/03	1.59E+00
	35	SW-C-3	11/16/03	12/3/03	4.36E-02
	44	SW-C-4	11/16/03	12/9/03	4.29E+00
	53	SW-C-5	11/16/03	12/9/03	1.49E+00
	62	SW-C-6	11/16/03	12/10/03	1.10E+01

Table 1: Agricultural Application Air Monitoring Results for Chloropicrin

Site	Log Number	Sample ID	Date Received	Date Analyzed	Chloropicrin amount (µg/sample)
WC	19	WC-C-1	11/16/03	11/20/03	8.11E-02
	27	WC-C-2	11/16/03	12/3/03	5.13E+00
	36	WC-C-3	11/16/03	12/9/03	8.90E-01
	45	WC-C-4	11/16/03	12/9/03	6.94E+00
	54	WC-C-5	11/16/03	12/9/03	1.42E+00
	63	WC-C-6	11/16/03	12/10/03	9.67E+00

Table 1 Notes: Agricultural Application Monitoring Results,

If analytical result is \geq MDL and $<$ EQL it is reported in the table as detected (DET). Levels at or above the EQL are reported as the actual measured value and are reported to three significant figures.

MDL = 3.96 ng/sample

EQL = 19.8 ng/sample

µg = microgram

Sample Log Numbers followed with the letter B are the cartridge back section results for the corresponding log number without the B.

Sample ID (Sample identification) numbers followed by the letter C are collocated samples for the samples with the corresponding number.

Site location identification:

E: East
 NC: North
 NE: Northeast
 NW: Northwest
 SC: South
 SE: Southeast
 SW: Southwest
 WC: West

**Table 2: Field QC Sample Results
Chloropicrin Application**

Quality Control Type	Laboratory ID	Date Analyzed	Chloropicrin amount (ng/sample)	Percent Recovery*
Lab Spike (100 ng)	LS01	11/19/03	91.41	91.41
	LS02	11/19/03	87.12	87.12
	LS03	11/17/03	102.66	102.66
	LS04	11/17/03	107.61	107.61
	LS05	12/5/03	89.40	89.40
	LS06	12/5/03	92.73	92.73

Field Spike (100 ng)	SE-C-B1-FS	11/18/03	14769.00	+
	SW-C-B1-FS	11/18/03	826.50	95.55 ¹
	NW-C-B1-FS	11/18/03	476.62	85.86 ¹
	NE-C-B1-FS	11/18/03	15331.00	+

Trip Spike (100 ng)	C-TS	11/17/03	103.62	103.62
---------------------	------	----------	--------	--------

Trip Blank	C-TB	11/17/03	<MDL	
------------	------	----------	------	--

Notes:

- * Field spike values are not corrected for background levels.
- ID Identification
- <MDL Less than method detection limit
- ng Nanograms
- 1 Value after collocated background result subtracted
- + Spike amount less than one percent of value reported therefore percent recovery not calculated

APPENDIX III

NOTICE OF INTENT TO APPLY
RESTRICTED MATERIALS

FROM: JERTBERG STRAWBERRIES INC

FAX NO. : 831 7280179

Nov. 10 2003 11:21AM P2

STATE OF CALIFORNIA
DEPARTMENT OF FOOD AND AGRICULTURE

NOTICE OF INTENT TO APPLY
RESTRICTED MATERIALS

296411

COUNTY NO.		SECTION		TOWNSHIP		RANGE		MERCIDIAN		APPROXIMATE AREA		PERMITTEE/PROPERTY OPERATOR		APPLICATION NAME AND ADDRESS	
NURSERY												JERTBERG STRAWBERRIES INC.		Jertberg Strawberries INC.	
OPERATOR ID/PERMIT NO.										SITE IDENTIFICATION NUMBER		TOTAL PLANTED ACREAGE/UNITS		64 D Penny Ln.	
44-04-440211A										1 A		10.102 AC.		Watsonville, Ca. 95076	
LOCAL: 187 B SAN ANDREAS RD. WATSONVILLE										BLOCK ID IF APPLICABLE					

DATE/TIME APPLIED		TOTAL ACREAGE/UNITS TREATED		COMMODITY/SITE TREATED	
11/10/03 11:00 AM		5 AC		P. PLANT STRAWBERRIES	
MANUFACTURER/NAME OF PRODUCT APPLIED		EPA/CAUF. REG. NO. FROM LABEL		RATE	
Tricon				300 lb/AC	
methy/bromide 50/50				Soil Pathogens	

13
11/10/03
11:00 AM

THIS IS ON ISOLATED BLOCK
INNER BZ. 160
OUTER BZ. 520

APPLIED/SUPERVISED BY		PCA NAME	
Gary Jertberg or Heriberto Corona		Heriberto Corona	
DATE		TIME	
11/10/03		11:00 AM	
DOE NO.		DATE	

TREATMENT
CARRA

(1) CAC Submit to AGRICULTURAL COMMISSIONER at least 24 hours before application. 33-17-1 REV 3/00

Method (4)(b)(1)
Emission Ratio = 8
Emission Rate 120

See Attached map.


RECEIVED
03 NOV 10 PM 12:09
AGRICULTURE
SANTA CRUZ COUNTY
71

831 7280179

JERTBERGSTRAWBERRIESINC

FAX NO. : 831 7280179

Nov. 10 2003 11:20AM P1

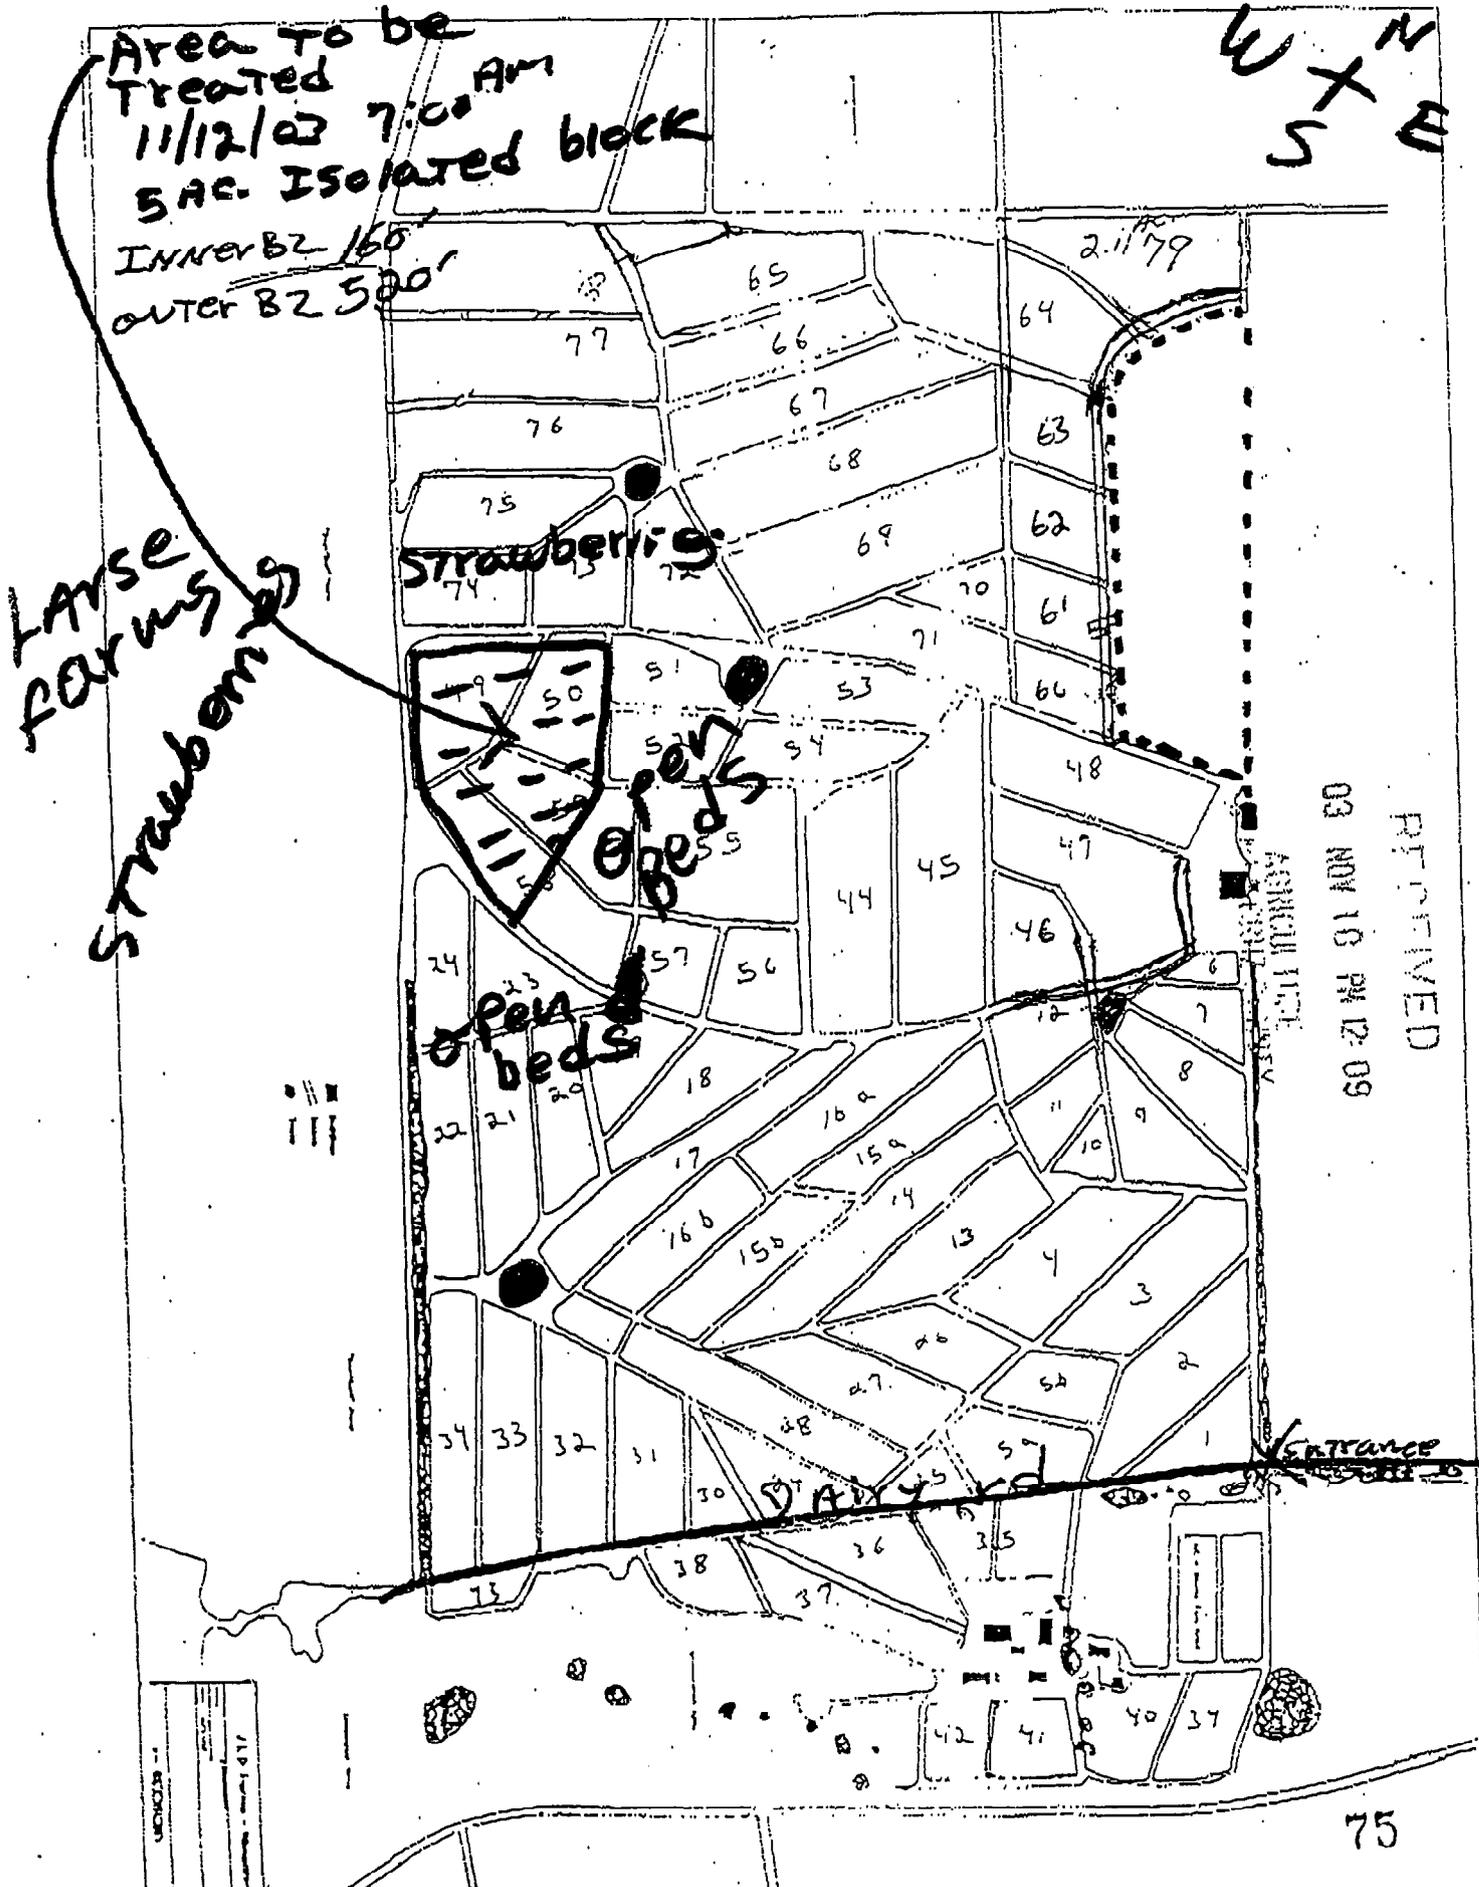

RECEIVED
03 NOV 18 PM 12:09

1/12/03
JERTBERG
STRAWBERRIES INC

SANTA CRUZ COUNTY

APPROVED
JK 10/1/05

WORKSITE PLAN

changes from previous WSP

can have 10/3 or later

PERMITTEE: Jexberg

PERMIT NUMBER: 440211A SITE NUMBER: 1A

SITE LOCATION DESCRIPTION: 187 B San Andreas

PEST CONTROL BUSINESS: Tri Cal

APPLICATION METHOD: 3(B)(1) flat fumigation

APPLICATION RATE: 350

TOTAL NUMBER OF ACRES TO BE FUMIGATED: 4

INITIAL NOTIFICATION ZONE: 360 (OUTER BUFFER ZONE + 300 FEET).

CONTACT THE PEST CONTROL BUSINESS TO GET THE INFORMATION TO DETERMINE THE NOTIFICATION ZONE. THE TABLE IS INCLUDED ONLY TO MAKE THE CALCULATIONS EASIER:

LARGEST NUMBER OF ACRES TO BE FUMIGATED IN 48 HRS	RATE	% MB	EMISSION RATIO	EMISSION RATE	OUTER BUFFER ZONE	NOTIFICATION ZONE (OUTER BUFFER ZONE + 300 FEET)
4	350#	67/33	.75	60	60	360

ATTACH THE FOLLOWING:

1. **MAP** - A map of the site must be included as part of the worksite plan. The map must have the neighboring properties numbered. If the aerial from the county is not used, measurements must be made from the field to be fumigated to the property lines of all the surrounding properties where there are residences or sensitive sites. These measurements must be on the map.
2. **NOTIFICATION LOG** - A notification log must be included as part of the worksite plan. The Santa Cruz County form must be used and the required areas must be completed. (Attached).
3. **TARP REPAIR AND CUTTING PLAN** - A tarpaulin repair response plan and tarp cutting plan must be included as part of the worksite plan. The Santa Cruz County form must be completed and used. (Attached)

SANTA CRUZ COUNTY WORKSITE PLAN

APPROVED
JK 7/1/03

PERMITTEE: Terber Strawberries Inc.

PERMIT NUMBER: 44-04-440211A SITE NUMBER: 1A

SITE LOCATION DESCRIPTION: 1873 San Andres Rd. Watsonville

PEST CONTROL BUSINESS: _____

APPLICATION METHOD: (4)(B)(1)

APPLICATION RATE: 300^{lb}/AC.

TOTAL NUMBER OF ACRES TO BE FUMIGATED: 100 AC.

INITIAL NOTIFICATION ZONE: 1,060' (OUTER BUFFER ZONE + 300 FEET)

CONTACT THE PEST CONTROL BUSINESS TO GET THE INFORMATION TO DETERMINE THE NOTIFICATION ZONE. THE TABLE IS INCLUDED ONLY TO MAKE THE CALCULATIONS EASIER:

LARGEST NUMBER OF ACRES TO BE FUMIGATED IN 48 HRS	RATE	% MB	EMISSION RATIO	EMISSION RATE	OUTER BUFFER ZONE	NOTIFICATION ZONE (OUTER BUFFER ZONE + 300 FEET)
10 ^{AC.}	300 ^{lb} / AC.	50%	.8	120	760'	1,060'



ATTACH THE FOLLOWING:

1. **MAP** - A map of the site must be included as part of the worksite plan. The map must have the neighboring properties numbered. If the aerial from the county is not used, measurements must be made from the field to be fumigated to the property lines of all the surrounding properties where there are residences or sensitive sites. These measurements must be on the map.
2. **NOTIFICATION LOG** - A notification log must be included as part of the worksite plan. The Santa Cruz County form must be used and the required areas must be completed. (Attached).
3. **TARP REPAIR AND CUTTING PLAN** - A tarpaulin repair response plan and tarp cutting plan must be included as part of the worksite plan. The Santa Cruz County form must be completed and used. (Attached)

APPENDIX IV

CHLOROPICRIN APPLICATION METEOROLOGICAL DATA

Background Period 1
11/12/03 0630 - 1700

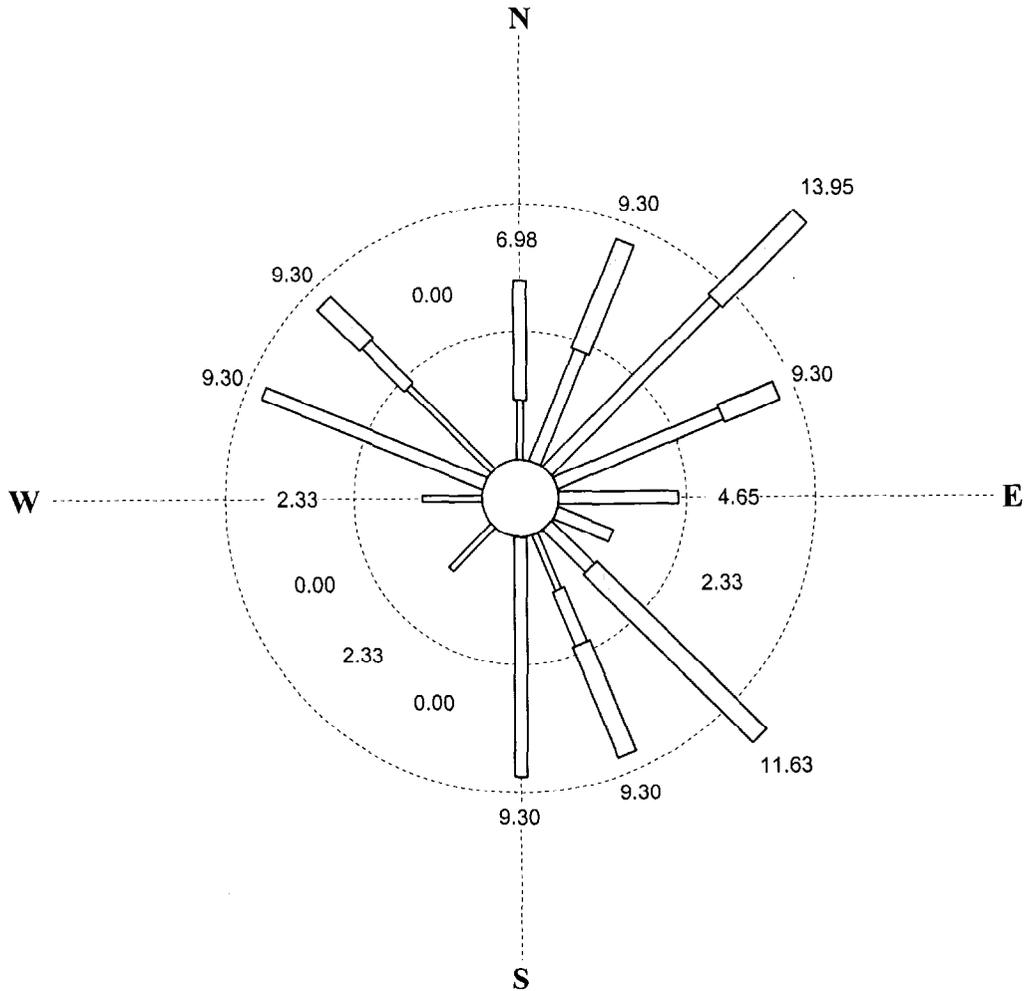

Wind Speed (Miles Per Hour)

Calms excluded.
 Rings drawn at 5% intervals.
 Wind flow is FROM the directions shown.
 No observations were missing.

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	2.33	4.65	0.00	0.00	0.00	0.00
NNE	0.00	4.65	4.65	0.00	0.00	0.00
NE	0.00	9.30	4.65	0.00	0.00	0.00
ENE	0.00	6.98	2.33	0.00	0.00	0.00
E	0.00	4.65	0.00	0.00	0.00	0.00
ESE	0.00	2.33	0.00	0.00	0.00	0.00
SE	0.00	2.33	9.30	0.00	0.00	0.00
SSE	2.33	2.33	4.65	0.00	0.00	0.00

TOTAL OBS = 48 MISSING OBS = 0

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY



DIR	0.1	3.5	6.9	11.5	18.4	24.2
S	0.00	9.30	0.00	0.00	0.00	0.00
SSW	0.00	0.00	0.00	0.00	0.00	0.00
SW	2.33	0.00	0.00	0.00	0.00	0.00
WSW	0.00	0.00	0.00	0.00	0.00	0.00
W	2.33	0.00	0.00	0.00	0.00	0.00
WNW	0.00	9.30	0.00	0.00	0.00	0.00
NW	4.65	2.33	2.33	0.00	0.00	0.00
NNW	0.00	0.00	0.00	0.00	0.00	0.00

CALM OBS = 5

Chloropicrin Application Monitoring - Background Period 1

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/12/2003	6:15	6.7	105.9	8.38	78.7	29.75	7.2
11/12/2003	6:30	5.2	63.8	8.27	80.6	29.75	30.5
11/12/2003	6:45	7.1	22.2	8.05	85	29.75	8.9
11/12/2003	7:00	8.9	26.9	8.27	83.6	29.75	4.5
11/12/2003	7:15	10.1	48.9	8.49	82	29.75	4.6
11/12/2003	7:30	8.4	52.2	8.44	82.9	29.75	6.4
11/12/2003	7:45	7.2	61.3	7.89	86.1	29.76	5.6
11/12/2003	8:00	3.7	47.6	8.38	85.9	29.76	9.8
11/12/2003	8:15	2.6	2.1	9.31	82.8	29.76	18.5
11/12/2003	8:30	2.8	268.9	10.3	79.8	29.77	45.8
11/12/2003	8:45	3	227.3	10.02	81.7	29.78	5.9
11/12/2003	9:00	2.6	315.4	9.92	83.2	29.78	57.7
11/12/2003	9:15	5.5	3.3	10.63	78.9	29.77	15.8
11/12/2003	9:30	4.9	8.3	11.56	77.8	29.77	30.5
11/12/2003	9:45	4.5	33.7	12.38	72.9	29.78	13.9
11/12/2003	10:00	4.1	38.1	13.31	68.7	29.77	16.2
11/12/2003	10:15	3.9	18.1	14.02	66.7	29.77	21.4
11/12/2003	10:30	4.2	49.3	14.84	63.3	29.78	28.1
11/12/2003	10:45	5.5	69	15.22	60.9	29.78	8.5
11/12/2003	11:00	5.4	50.5	16.15	57.4	29.79	21
11/12/2003	11:15	6.8	75.7	16.87	53.8	29.79	17
11/12/2003	11:30	5.3	93.9	17.25	51.7	29.79	19.4
11/12/2003	11:45	5.6	94.2	17.8	51.9	29.8	18.1
11/12/2003	12:00	6.5	115.5	18.4	49.7	29.8	13.3
11/12/2003	12:15	7.5	128.3	18.45	45.8	29.79	22.5
11/12/2003	12:30	6.7	173.4	16.98	57.1	29.78	34.7
11/12/2003	12:45	5.2	169.5	17.58	52.2	29.78	49.2
11/12/2003	13:00	4.7	157.2	17.74	53.3	29.78	21.4
11/12/2003	13:15	5.1	186.9	17.52	57.7	29.78	18.4
11/12/2003	13:30	8.4	157.2	17.8	51.7	29.77	9.4
11/12/2003	13:45	10.8	154.2	18.02	45.5	29.77	7.1
11/12/2003	14:00	10.5	145.4	17.96	43.3	29.76	7.7
11/12/2003	14:15	10	137.8	18.18	39.5	29.76	6
11/12/2003	14:30	8	134.7	18.45	38.7	29.76	6.7
11/12/2003	14:45	5.5	138.4	18.67	35.7	29.75	8.1
11/12/2003	15:00	3.5	150.8	18.95	36.2	29.75	20.3
11/12/2003	15:15	3.8	188.6	18.73	36.5	29.75	41
11/12/2003	15:30	6	295.6	17.14	56.9	29.75	9.9
11/12/2003	15:45	7	307.7	16.48	59.6	29.75	4.4
11/12/2003	16:00	5.8	306.2	15.99	61	29.75	8.3
11/12/2003	16:15	2.4	310.3	16.59	56.2	29.76	27.9
11/12/2003	16:30	4.5	288	16.26	60.5	29.75	6.4
11/12/2003	16:45	4.3	285.9	16.26	59.4	29.74	8.1
11/12/2003	17:00	3.9	291.8	16.05	58.7	29.74	5.1
11/12/2003	17:15	4.4	273	15.83	59.1	29.74	14.6
11/12/2003	17:30	6.1	250.2	16.37	52.3	29.74	4.2

Background Period 2
11/12/03 1700 - 11/13/03 0600

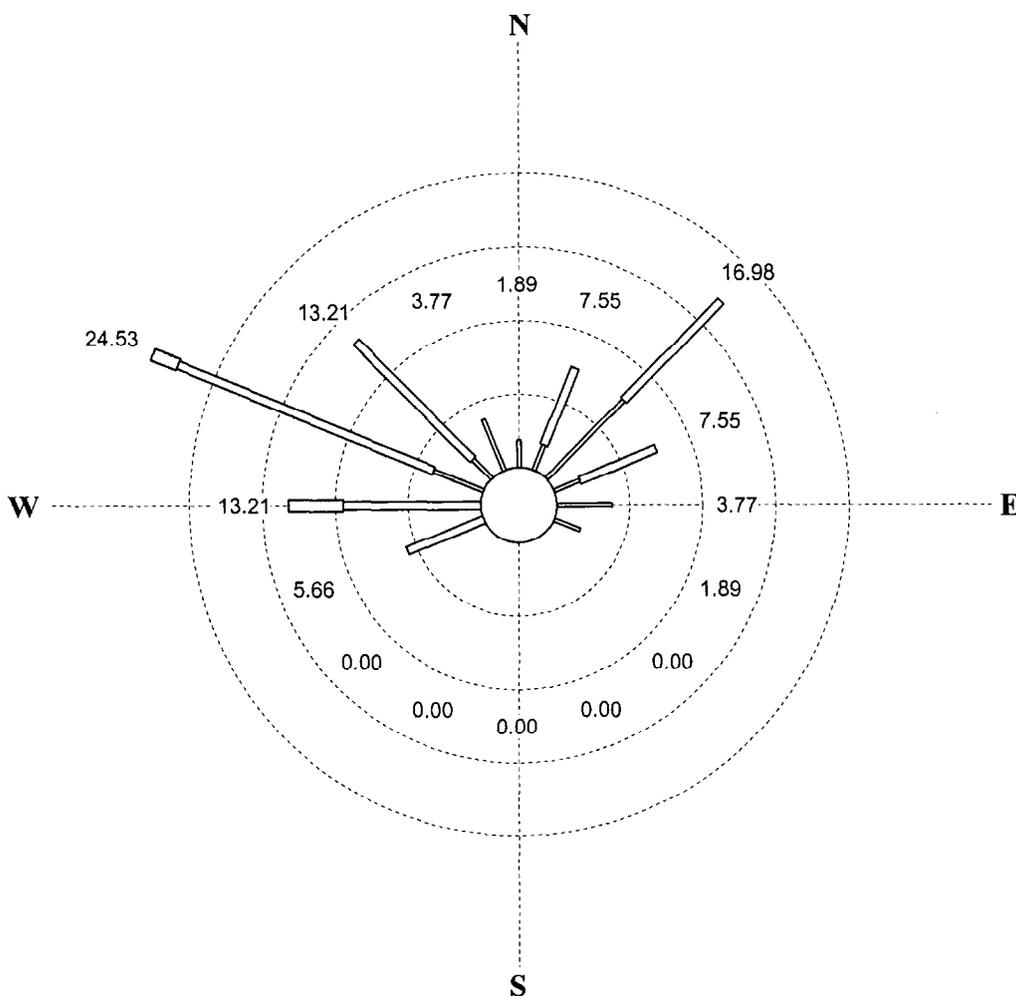

Wind Speed (Miles Per Hour)

Calms excluded.
 Rings drawn at 5% intervals.
 Wind flow is FROM the directions shown.
 No observations were missing.

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	1.89	0.00	0.00	0.00	0.00	0.00
NNE	1.89	5.66	0.00	0.00	0.00	0.00
NE	7.55	9.43	0.00	0.00	0.00	0.00
ENE	1.89	5.66	0.00	0.00	0.00	0.00
E	3.77	0.00	0.00	0.00	0.00	0.00
ESE	1.89	0.00	0.00	0.00	0.00	0.00
SE	0.00	0.00	0.00	0.00	0.00	0.00
SSE	0.00	0.00	0.00	0.00	0.00	0.00

TOTAL OBS = 58 MISSING OBS = 0

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
S	0.00	0.00	0.00	0.00	0.00	0.00
SSW	0.00	0.00	0.00	0.00	0.00	0.00
SW	0.00	0.00	0.00	0.00	0.00	0.00
WSW	0.00	5.66	0.00	0.00	0.00	0.00
W	0.00	9.43	3.77	0.00	0.00	0.00
WNW	3.77	18.87	1.89	0.00	0.00	0.00
NW	1.89	11.32	0.00	0.00	0.00	0.00
NNW	3.77	0.00	0.00	0.00	0.00	0.00

CALM OBS = 5



Chloropicrin Application Monitoring - Background Period 2

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/12/2003	16:45	4.3	285.9	16.26	59.4	29.74	8.1
11/12/2003	17:00	3.9	291.8	16.05	58.7	29.74	5.1
11/12/2003	17:15	4.4	273	15.83	59.1	29.74	14.6
11/12/2003	17:30	6.1	250.2	16.37	52.3	29.74	4.2
11/12/2003	17:45	6.8	253.6	16.1	52.1	29.74	5.7
11/12/2003	18:00	6.4	264.5	15.66	54.9	29.74	7.9
11/12/2003	18:15	6.6	273.3	15.33	57.3	29.74	6.9
11/12/2003	18:30	6.8	268	15.11	61.2	29.74	7.9
11/12/2003	18:45	5.9	286.9	14.29	76	29.74	11
11/12/2003	19:00	6.6	299.1	14.24	75.6	29.74	11.4
11/12/2003	19:15	7.4	286.4	14.57	69.3	29.74	10.1
11/12/2003	19:30	7.8	276.2	14.68	68.8	29.74	8.3
11/12/2003	19:45	6.9	286.1	14.4	76.5	29.74	4.3
11/12/2003	20:00	6.2	301.1	14.62	72.8	29.74	6.3
11/12/2003	20:15	6.7	311.9	14.9	67.6	29.74	5.1
11/12/2003	20:30	5.4	309.7	14.84	66.2	29.75	5.5
11/12/2003	20:45	6.4	305.4	14.9	62.4	29.75	8.5
11/12/2003	21:00	5.5	285.2	14.9	61.6	29.75	7.4
11/12/2003	21:15	5.9	304.2	15.11	59.9	29.76	11.2
11/12/2003	21:30	6.9	317.8	15.17	59.9	29.76	7.9
11/12/2003	21:45	6.1	313.2	15.11	61.5	29.76	12.2
11/12/2003	22:00	3.8	286.3	15.22	59.9	29.77	21.7
11/12/2003	22:15	2.6	102.8	14.07	68.1	29.77	83.8
11/12/2003	22:30	3.8	251.6	14.73	64.4	29.78	29.7
11/12/2003	22:45	6.8	279.9	15.06	62.7	29.78	6.7
11/12/2003	23:00	7.2	279.7	15.11	63.4	29.78	8.8
11/12/2003	23:15	6.2	288.7	14.95	65.9	29.78	8.2
11/12/2003	23:30	4	291.1	14.79	67.9	29.79	7.2
11/12/2003	23:45	2.9	300.9	14.73	68.4	29.79	11.3
11/12/2003	0:00	2.3	334.8	14.73	68.2	29.79	11.5
11/13/2003	0:15	3.1	41.3	13.86	71.6	29.79	51.6
11/13/2003	0:30	3.4	90.9	12.98	74.5	29.79	11.4
11/13/2003	0:45	1.2	85.7	13.25	72.3	29.79	30.9
11/13/2003	1:00	1.9	52.4	13.25	72.8	29.79	25.6
11/13/2003	1:15	1.7	1.9	13.42	73	29.79	34.2
11/13/2003	1:30	1.3	316.9	13.86	75.9	29.79	30
11/13/2003	1:45	2.9	293.7	13.69	82.5	29.79	14.2
11/13/2003	2:00	3.7	291.6	13.75	87.5	29.79	7.9
11/13/2003	2:15	2.4	341.5	12.87	89	29.79	62.1
11/13/2003	2:30	2.4	26.3	12.21	89.2	29.79	35.7
11/13/2003	2:45	5.1	62.3	10.3	87.7	29.79	12.4
11/13/2003	3:00	6	56.9	9.97	87.5	29.79	5
11/13/2003	3:15	5.2	47.1	10.63	88.1	29.79	7
11/13/2003	3:30	4	55.6	10.9	86.6	29.79	12.2
11/13/2003	3:45	4.8	42.6	10.13	88.9	29.79	10.3
11/13/2003	4:00	5.1	51.9	9.15	92	29.78	9.2
11/13/2003	4:15	4.7	39.8	9.42	92.3	29.78	11.2
11/13/2003	4:30	6.1	23.9	9.97	90.5	29.78	5.7

Chloropicrin Application Monitoring - Background Period 2

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/13/2003	4:45	5.8	23.1	10.35	90.1	29.78	4.9
11/13/2003	5:00	6.3	19.3	10.85	89.9	29.79	4.3
11/13/2003	5:15	5.3	59.2	10.9	89.4	29.79	44.4
11/13/2003	5:30	3.4	65.9	9.86	94.5	29.79	35.7
11/13/2003	5:45	2.9	48.7	10.74	91.7	29.79	43
11/13/2003	6:00	2.5	53.1	11.28	89.7	29.79	21.2
11/13/2003	6:15	1.5	6.2	10.79	91	29.8	58.2
11/13/2003	6:30	2	297.2	10.9	91.6	29.8	44.1
11/13/2003	6:45	2.7	103.3	11.34	90.9	29.81	58.6

Period 1
11/13/03 0730 - 1600

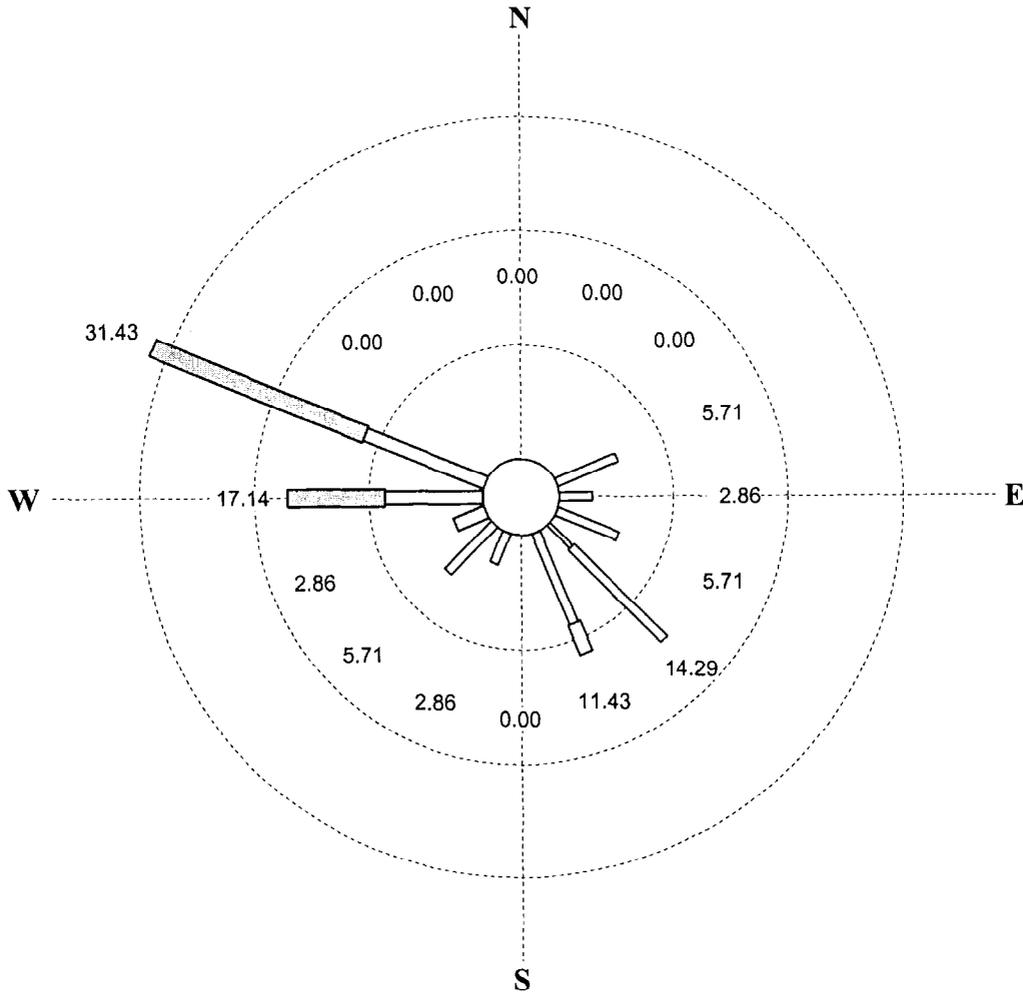

Wind Speed (Miles Per Hour)

Calms excluded.
 Rings drawn at 10% intervals.
 Wind flow is FROM the directions shown.
 No observations were missing.

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	0.00	0.00	0.00	0.00	0.00	0.00
NNE	0.00	0.00	0.00	0.00	0.00	0.00
NE	0.00	0.00	0.00	0.00	0.00	0.00
ENE	0.00	5.71	0.00	0.00	0.00	0.00
E	0.00	2.86	0.00	0.00	0.00	0.00
ESE	0.00	5.71	0.00	0.00	0.00	0.00
SE	2.86	11.43	0.00	0.00	0.00	0.00
SSE	0.00	8.57	2.86	0.00	0.00	0.00

TOTAL OBS = 40 MISSING OBS = 0

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY



DIR	0.1	3.5	6.9	11.5	18.4	24.2
S	0.00	0.00	0.00	0.00	0.00	0.00
SSW	0.00	2.86	0.00	0.00	0.00	0.00
SW	0.00	5.71	0.00	0.00	0.00	0.00
WSW	0.00	0.00	2.86	0.00	0.00	0.00
W	0.00	0.00	8.57	8.57	0.00	0.00
WNW	0.00	0.00	11.43	20.00	0.00	0.00
NW	0.00	0.00	0.00	0.00	0.00	0.00
NNW	0.00	0.00	0.00	0.00	0.00	0.00

CALM OBS = 5

Chloropicrin Application Monitoring - Period 1

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/13/2003	7:15	2.2	252.9	10.68	93.7	29.82	25.7
11/13/2003	7:30	4.3	124.2	12.32	81.2	29.83	24.1
11/13/2003	7:45	6.6	117	12.6	77.6	29.84	7.8
11/13/2003	8:00	4.7	131.3	11.89	79	29.85	12.9
11/13/2003	8:15	5.4	143.2	12.27	78.2	29.86	12.2
11/13/2003	8:30	6.7	146.2	13.14	75	29.87	13.7
11/13/2003	8:45	8.1	148.7	13.25	74.3	29.87	7.9
11/13/2003	9:00	5.4	108	13.14	76.9	29.88	17.4
11/13/2003	9:15	4.5	98.8	13.03	77.5	29.89	19.2
11/13/2003	9:30	4.6	63	12.87	80	29.9	16.3
11/13/2003	9:45	3.8	77.4	13.36	79.2	29.91	26.6
11/13/2003	10:00	3.3	139	14.46	75.2	29.91	22.9
11/13/2003	10:15	5.7	146.5	15.11	70.7	29.93	22.9
11/13/2003	10:30	6	162.4	15.28	68	29.93	11.8
11/13/2003	10:45	5.3	159.8	15.44	68.2	29.94	13.6
11/13/2003	11:00	5.2	203.1	15.44	69.1	29.94	19.7
11/13/2003	11:15	4.8	220.1	15.66	65.9	29.94	16
11/13/2003	11:30	4.9	236.2	15.99	64.1	29.94	19.4
11/13/2003	11:45	8.2	256.3	15.94	66	29.94	12.5
11/13/2003	12:00	10	263	15.72	69.3	29.94	14
11/13/2003	12:15	10.6	263.2	15.61	74.8	29.94	9.3
11/13/2003	12:30	11.6	264.6	15.61	81.7	29.94	9.5
11/13/2003	12:45	13	263.6	15.44	87.2	29.94	8.3
11/13/2003	13:00	12.6	270	15.22	86.9	29.93	7.7
11/13/2003	13:15	11.5	276.5	15.28	83.3	29.93	11.1
11/13/2003	13:30	13.6	295.3	15.33	78.7	29.93	7.7
11/13/2003	13:45	14.8	295.2	15.11	77.6	29.93	6.2
11/13/2003	14:00	13.7	293	15.11	77.3	29.93	5.7
11/13/2003	14:15	12.2	293.7	15.01	78.7	29.93	7.8
11/13/2003	14:30	11.8	293.8	15.01	78.2	29.93	6.1
11/13/2003	14:45	11.4	291.5	15.11	78.2	29.93	7.6
11/13/2003	15:00	11.8	292	14.95	78.9	29.93	6.5
11/13/2003	15:15	11.6	291.3	14.79	80.3	29.93	5.9
11/13/2003	15:30	11	294.5	14.68	82.3	29.93	6
11/13/2003	15:45	10	294.4	14.62	83.7	29.93	6.7
11/13/2003	16:00	9.3	296.9	14.68	82.6	29.92	7.6
11/13/2003	16:15	8.5	298.9	14.62	81.9	29.92	8.5
11/13/2003	16:30	6.6	296.9	14.51	81.8	29.91	10.2
11/13/2003	16:45	5.7	295.8	14.51	81.5	29.91	15.6
11/13/2003	17:00	6.3	293.1	14.4	82.6	29.91	8.4
11/13/2003	17:15	6.3	293.7	14.18	83.5	29.91	6.4
11/13/2003	17:30	5.6	293.9	14.13	83.4	29.91	8
11/13/2003	17:45	3.6	297.9	14.24	82.6	29.91	14.7

Period 2
11/13/03 1600 - 11/14/03 0800

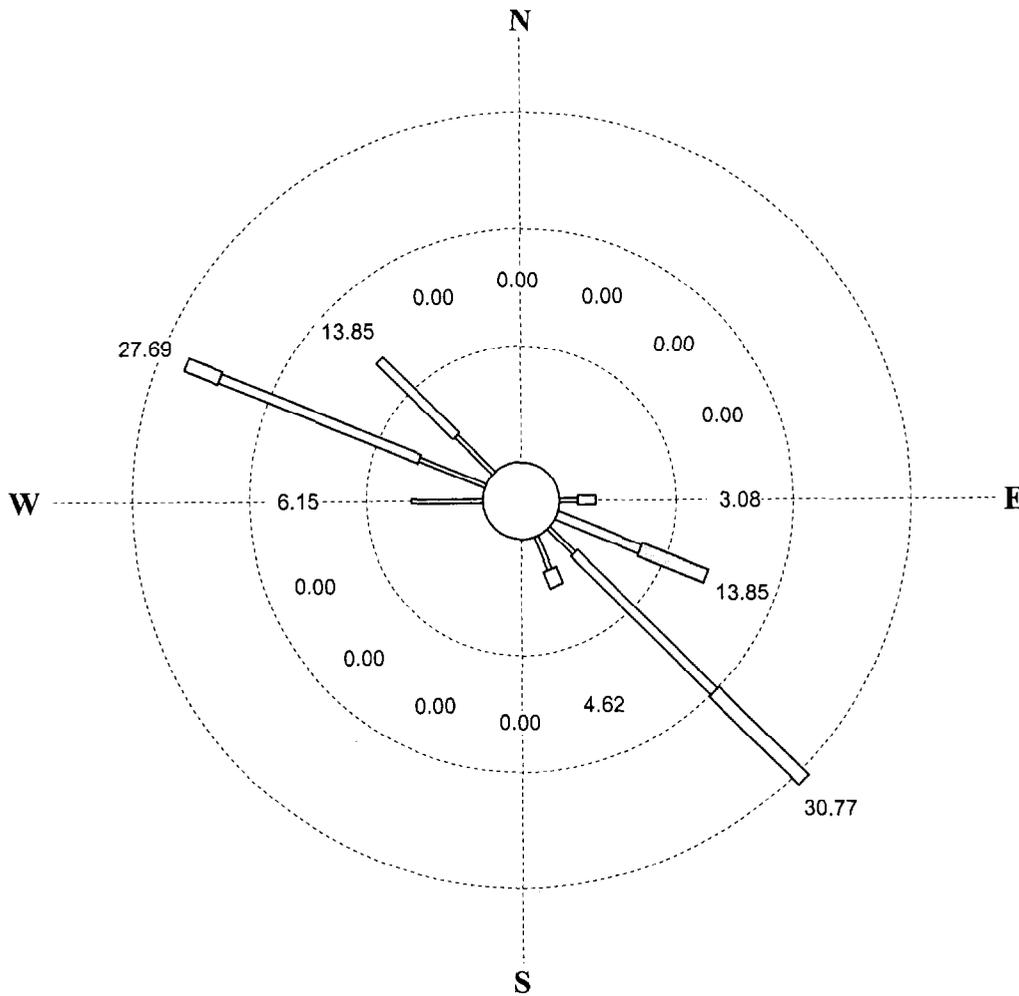

Wind Speed (Miles Per Hour)

Calms excluded.
 Rings drawn at 10% intervals.
 Wind flow is FROM the directions shown.
 No observations were missing.

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	0.00	0.00	0.00	0.00	0.00	0.00
NNE	0.00	0.00	0.00	0.00	0.00	0.00
NE	0.00	0.00	0.00	0.00	0.00	0.00
ENE	0.00	0.00	0.00	0.00	0.00	0.00
E	1.54	1.54	0.00	0.00	0.00	0.00
ESE	0.00	7.69	6.15	0.00	0.00	0.00
SE	3.08	16.92	10.77	0.00	0.00	0.00
SSE	3.08	0.00	1.54	0.00	0.00	0.00

TOTAL OBS = 70 MISSING OBS = 0

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
S	0.00	0.00	0.00	0.00	0.00	0.00
SSW	0.00	0.00	0.00	0.00	0.00	0.00
SW	0.00	0.00	0.00	0.00	0.00	0.00
WSW	0.00	0.00	0.00	0.00	0.00	0.00
W	6.15	0.00	0.00	0.00	0.00	0.00
WNW	6.15	18.46	3.08	0.00	0.00	0.00
NW	4.62	9.23	0.00	0.00	0.00	0.00
NNW	0.00	0.00	0.00	0.00	0.00	0.00

CALM OBS = 5



Chloropicrin Application Monitoring - Period 2

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/13/2003	15:45	10	294.4	14.62	83.7	29.93	6.7
11/13/2003	16:00	9.3	296.9	14.68	82.6	29.92	7.6
11/13/2003	16:15	8.5	298.9	14.62	81.9	29.92	8.5
11/13/2003	16:30	6.6	296.9	14.51	81.8	29.91	10.2
11/13/2003	16:45	5.7	295.8	14.51	81.5	29.91	15.6
11/13/2003	17:00	6.3	293.1	14.4	82.6	29.91	8.4
11/13/2003	17:15	6.3	293.7	14.18	83.5	29.91	6.4
11/13/2003	17:30	5.6	293.9	14.13	83.4	29.91	8
11/13/2003	17:45	3.6	297.9	14.24	82.6	29.91	14.7
11/13/2003	18:00	2.5	291.4	14.24	82.6	29.91	17.2
11/13/2003	18:15	3.5	275.8	14.18	83.7	29.91	10.1
11/13/2003	18:30	3.3	283	14.07	85.8	29.91	13.4
11/13/2003	18:45	3.3	292.7	14.07	85.3	29.9	11
11/13/2003	19:00	4.2	287.1	14.02	85.6	29.91	9.3
11/13/2003	19:15	4.4	292.5	14.13	85.1	29.91	12.5
11/13/2003	19:30	3.4	322.4	14.18	84.4	29.91	26.2
11/13/2003	19:45	3.5	306.9	14.13	84.7	29.9	19.9
11/13/2003	20:00	2.7	303	13.86	86	29.9	18.1
11/13/2003	20:15	4.7	300.8	13.8	86.7	29.9	10.6
11/13/2003	20:30	4.9	308.7	13.53	87.6	29.91	8.5
11/13/2003	20:45	4.5	315.2	13.53	87.5	29.9	8.1
11/13/2003	21:00	5.1	314.1	13.42	88.1	29.91	7.6
11/13/2003	21:15	4.4	316.8	13.47	87.9	29.91	7.1
11/13/2003	21:30	6.5	298.3	13.47	88.3	29.91	4.8
11/13/2003	21:45	6.4	300.7	13.58	88.4	29.91	5
11/13/2003	22:00	5.5	298.2	13.69	87.6	29.92	7.1
11/13/2003	22:15	5.5	309.4	13.64	87.6	29.91	6.5
11/13/2003	22:30	3.7	312.5	13.47	88.4	29.91	12.2
11/13/2003	22:45	2.2	318.2	12.65	91.2	29.91	49.6
11/13/2003	23:00	2.2	274.7	12.87	91.1	29.91	25.4
11/13/2003	23:15	2.4	165.5	12.54	91.4	29.91	68.5
11/13/2003	23:30	2.5	263.8	12.98	91.1	29.91	12.6
11/13/2003	23:45	1.9	271.3	13.14	91.1	29.91	28.2
11/13/2003	0:00	3.6	104.2	12.32	91.6	29.9	25.2
11/14/2003	0:15	3.8	100.3	11.99	92.1	29.9	8.7
11/14/2003	0:30	2.7	89.9	11.89	92.7	29.9	17.5
11/14/2003	0:45	3.2	132.8	11.67	93.6	29.9	9.4
11/14/2003	1:00	1.9	156.4	11.72	94.2	29.9	9.7
11/14/2003	1:15	3.5	144.1	11.72	94.2	29.9	6.5
11/14/2003	1:30	3.9	128.4	11.67	94.8	29.9	9.6
11/14/2003	1:45	5.4	125.3	11.89	92.2	29.9	4.5
11/14/2003	2:00	4.7	129.3	11.78	91.8	29.9	6.7
11/14/2003	2:15	5	139.1	11.83	91.7	29.9	5.6
11/14/2003	2:30	6.1	132.6	11.83	91.4	29.89	6.4
11/14/2003	2:45	5.1	124	11.67	91.6	29.89	7
11/14/2003	3:00	4.6	139.5	11.61	91.2	29.89	10.7
11/14/2003	3:15	5	129.2	11.5	91.1	29.89	12.5
11/14/2003	3:30	5.3	122.8	11.39	91.4	29.89	7.9

Chloropicrin Application Monitoring - Period 2

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/14/2003	3:45	6	127.3	11.5	90.3	29.89	8.7
11/14/2003	4:00	6.9	133.6	11.39	90.2	29.88	6.2
11/14/2003	4:15	7.3	134.8	11.23	89.8	29.88	7.9
11/14/2003	4:30	6.8	127.4	11.06	89.9	29.88	8.9
11/14/2003	4:45	7.8	126.2	10.96	89	29.88	7.2
11/14/2003	5:00	7.1	127.3	11.01	88.3	29.88	6.7
11/14/2003	5:15	6.2	106.7	11.06	88.7	29.89	17.7
11/14/2003	5:30	5.5	120.2	10.9	88.6	29.89	16.7
11/14/2003	5:45	8.4	132.4	10.74	86.1	29.89	8.1
11/14/2003	6:00	7.9	122.4	10.63	86.7	29.89	9.3
11/14/2003	6:15	7.9	137.8	10.57	86.2	29.9	8.9
11/14/2003	6:30	7.7	143	10.41	86	29.9	6.3
11/14/2003	6:45	7.3	147.6	10.3	87.1	29.9	7.1
11/14/2003	7:00	7.9	123.8	10.41	87.8	29.91	9.7
11/14/2003	7:15	8.4	119.1	10.41	88.6	29.91	6.4
11/14/2003	7:30	9.1	119.8	10.57	88.4	29.91	6.7
11/14/2003	7:45	6.7	118.2	10.74	88.7	29.91	7.7
11/14/2003	8:00	7.5	107.1	10.85	88.4	29.91	7.8
11/14/2003	8:15	6.1	94.7	10.96	89.1	29.9	9.1

Period 3
11/14/03 0800 - 1630

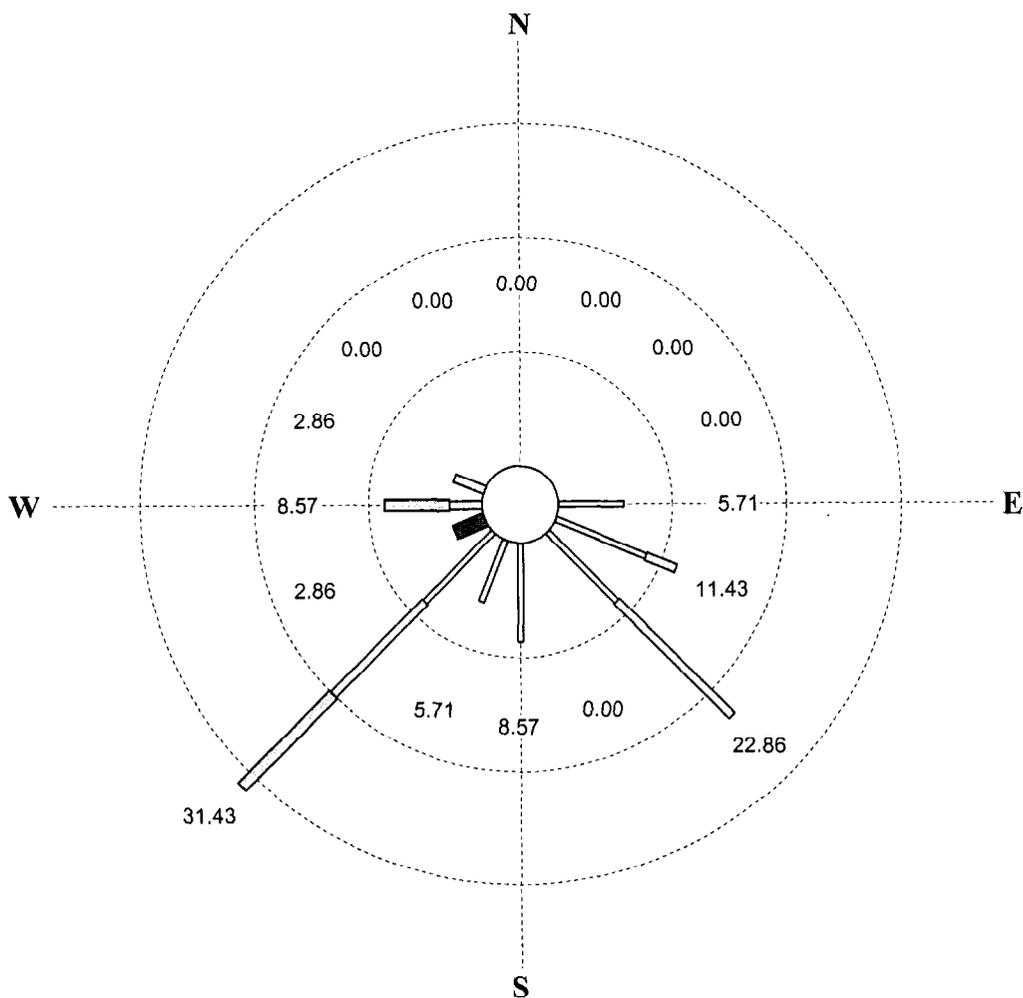

Wind Speed (Miles Per Hour)

Calms excluded.
Rings drawn at 10% intervals.
Wind flow is FROM the directions shown.
No observations were missing.

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	0.00	0.00	0.00	0.00	0.00	0.00
NNE	0.00	0.00	0.00	0.00	0.00	0.00
NE	0.00	0.00	0.00	0.00	0.00	0.00
ENE	0.00	0.00	0.00	0.00	0.00	0.00
E	0.00	5.71	0.00	0.00	0.00	0.00
ESE	0.00	8.57	2.86	0.00	0.00	0.00
SE	0.00	8.57	14.29	0.00	0.00	0.00
SSE	0.00	0.00	0.00	0.00	0.00	0.00

TOTAL OBS = 40 MISSING OBS = 0

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
LOWER BOUND OF CATEGORY



DIR	0.1	3.5	6.9	11.5	18.4	24.2
S	0.00	8.57	0.00	0.00	0.00	0.00
SSW	0.00	5.71	0.00	0.00	0.00	0.00
SW	0.00	8.57	11.43	11.43	0.00	0.00
WSW	0.00	0.00	0.00	0.00	2.86	0.00
W	0.00	0.00	2.86	5.71	0.00	0.00
WNW	0.00	0.00	2.86	0.00	0.00	0.00
NW	0.00	0.00	0.00	0.00	0.00	0.00
NNW	0.00	0.00	0.00	0.00	0.00	0.00

CALM OBS = 5

Chloropicrin Application Monitoring - Period 3

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/14/2003	7:30	9.1	119.8	10.57	88.4	29.91	6.7
11/14/2003	7:45	6.7	118.2	10.74	88.7	29.91	7.7
11/14/2003	8:00	7.5	107.1	10.85	88.4	29.91	7.8
11/14/2003	8:15	6.1	94.7	10.96	89.1	29.9	9.1
11/14/2003	8:30	6.4	85.1	11.06	88.8	29.9	7.6
11/14/2003	8:45	6.9	113.1	11.39	87.1	29.91	16.7
11/14/2003	9:00	5.9	126.3	11.56	86.1	29.91	11.5
11/14/2003	9:15	5	103.8	11.78	85.7	29.91	12.7
11/14/2003	9:30	6.1	119.5	11.99	85.4	29.91	11.9
11/14/2003	9:45	5.7	133.7	11.99	85.8	29.91	12.7
11/14/2003	10:00	6.9	144.4	12.1	85.1	29.91	10.5
11/14/2003	10:15	8.3	143.2	12.38	84.3	29.91	9.1
11/14/2003	10:30	11.5	142.5	12.87	81.7	29.91	7.2
11/14/2003	10:45	10.4	139	13.53	78.4	29.91	7.4
11/14/2003	11:00	9.6	143.9	13.97	75.2	29.91	7.5
11/14/2003	11:15	8.2	142.6	14.24	73	29.9	11.6
11/14/2003	11:30	6	173.2	14.62	69.4	29.9	20.5
11/14/2003	11:45	6.3	193.6	14.73	66.8	29.9	16.7
11/14/2003	12:00	6	179.2	14.79	66.3	29.9	14.8
11/14/2003	12:15	5.6	177.4	14.79	66.7	29.9	17
11/14/2003	12:30	5.8	213.2	14.73	66.6	29.9	10.5
11/14/2003	12:45	4.5	215.6	14.79	65	29.9	23.6
11/14/2003	13:00	5.7	220.8	14.95	63.2	29.9	8.6
11/14/2003	13:15	6.7	221.2	15.11	62.1	29.89	25.8
11/14/2003	13:30	11.5	226.4	15.22	62.4	29.89	13.8
11/14/2003	13:45	11.5	229.5	15.17	63.4	29.89	6.1
11/14/2003	14:00	14.3	222.2	14.73	70.1	29.89	9
11/14/2003	14:15	9.9	227.5	14.07	69.4	29.89	10.8
11/14/2003	14:30	9.5	222.7	14.57	67.6	29.88	12
11/14/2003	14:45	13.1	221.5	14.73	69.9	29.88	6.4
11/14/2003	15:00	16.3	215.6	14.68	69.8	29.87	7.4
11/14/2003	15:15	17	222.6	14.51	72.1	29.87	7.1
11/14/2003	15:30	21.4	251.5	13.64	82.6	29.89	15.2
11/14/2003	15:45	18.1	265.1	11.99	93.8	29.89	10.7
11/14/2003	16:00	14.3	266.8	11.39	97.2	29.9	6.9
11/14/2003	16:15	10.2	279.4	11.23	99.1	29.89	15.4
11/14/2003	16:30	8.1	290.5	11.12	99.9	29.89	8
11/14/2003	16:45	6.1	278.4	11.01	99.7	29.89	9

Period 4
11/14/03 1600 - 11/15/03 0800

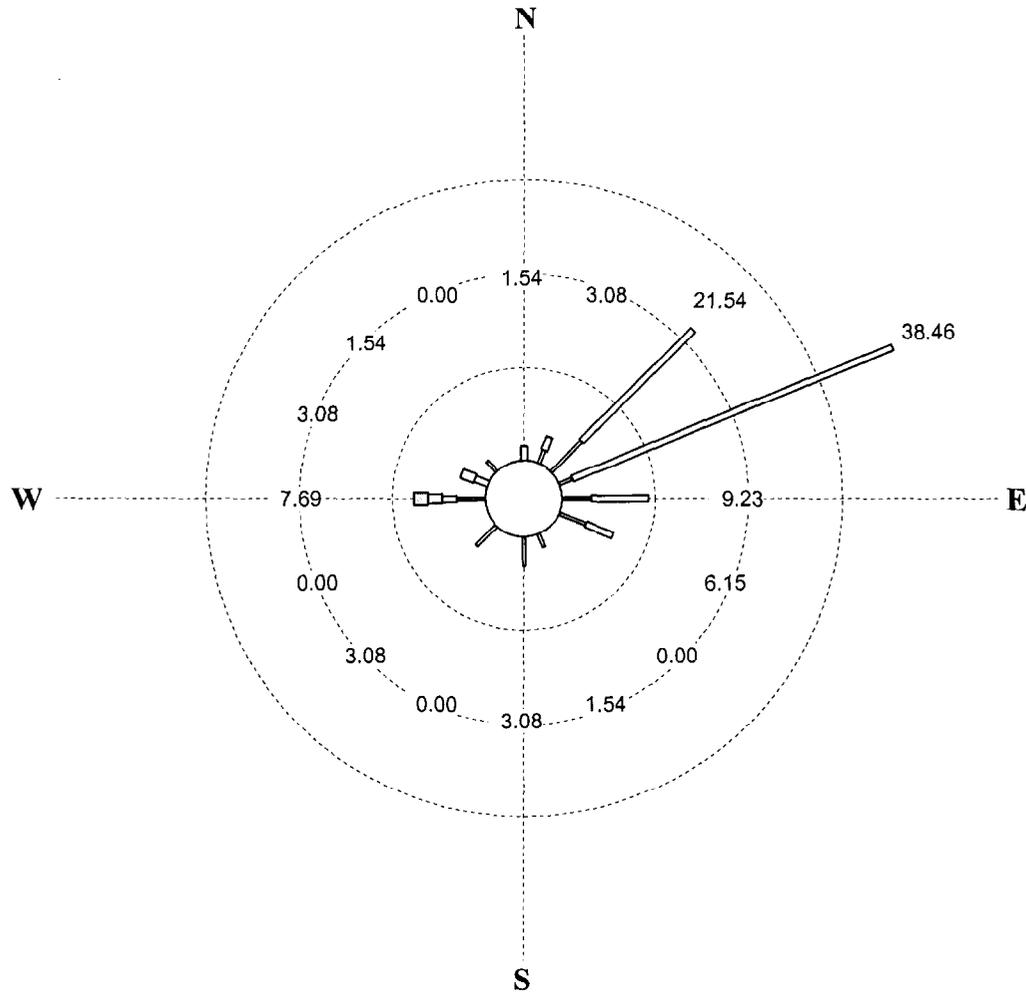

Wind Speed (Miles Per Hour)

Calms excluded.
 Rings drawn at 10% intervals.
 Wind flow is FROM the directions shown.
 No observations were missing.

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)							PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)						
LOWER BOUND OF CATEGORY							LOWER BOUND OF CATEGORY						
DIR	0.1	3.5	6.9	11.5	18.4	24.2	DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	0.00	1.54	0.00	0.00	0.00	0.00	S	3.08	0.00	0.00	0.00	0.00	0.00
NNE	1.54	1.54	0.00	0.00	0.00	0.00	SSW	0.00	0.00	0.00	0.00	0.00	0.00
NE	4.62	16.92	0.00	0.00	0.00	0.00	SW	3.08	0.00	0.00	0.00	0.00	0.00
ENE	1.54	36.92	0.00	0.00	0.00	0.00	WSW	0.00	0.00	0.00	0.00	0.00	0.00
E	3.08	6.15	0.00	0.00	0.00	0.00	W	3.08	1.54	1.54	1.54	0.00	0.00
ESE	3.08	3.08	0.00	0.00	0.00	0.00	WNW	0.00	1.54	1.54	0.00	0.00	0.00
SE	0.00	0.00	0.00	0.00	0.00	0.00	NW	1.54	0.00	0.00	0.00	0.00	0.00
SSE	1.54	0.00	0.00	0.00	0.00	0.00	NNW	0.00	0.00	0.00	0.00	0.00	0.00
TOTAL OBS = 70 MISSING OBS = 0							CALM OBS = 5						



Chloropicrin Application Monitorin - Period 4

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/14/2003	15:45	18.1	265.1	11.99	93.8	29.89	10.7
11/14/2003	16:00	14.3	266.8	11.39	97.2	29.9	6.9
11/14/2003	16:15	10.2	279.4	11.23	99.1	29.89	15.4
11/14/2003	16:30	8.1	290.5	11.12	99.9	29.89	8
11/14/2003	16:45	6.1	278.4	11.01	99.7	29.89	9
11/14/2003	17:00	4.3	281.5	10.96	99.2	29.89	11.3
11/14/2003	17:15	2	269.3	10.85	99.9	29.89	22
11/14/2003	17:30	2.4	262.7	10.96	99.4	29.89	17.5
11/14/2003	17:45	2.8	235.4	11.17	98.6	29.9	11.9
11/14/2003	18:00	2.4	233.8	11.23	98.5	29.89	22.9
11/14/2003	18:15	2.5	190	11.28	98.8	29.9	24.1
11/14/2003	18:30	3.4	165.6	11.39	99.4	29.9	21.1
11/14/2003	18:45	2.7	180.9	11.39	98.5	29.9	25
11/14/2003	19:00	1.8	114.1	11.5	98.1	29.91	29.1
11/14/2003	19:15	4	66.6	11.34	99.4	29.91	7.7
11/14/2003	19:30	4.4	66.9	11.23	100.5	29.91	10
11/14/2003	19:45	5	59.8	11.17	100.6	29.91	8.3
11/14/2003	20:00	5.2	62.3	11.17	100.6	29.92	10.3
11/14/2003	20:15	4.3	80.6	11.17	100	29.92	8.4
11/14/2003	20:30	3	97.3	11.17	99.5	29.92	8.6
11/14/2003	20:45	4.4	104	11.06	100.1	29.93	12.4
11/14/2003	21:00	4.7	82.7	11.01	100.8	29.93	11.6
11/14/2003	21:15	4.7	77.4	10.96	101.2	29.93	5.8
11/14/2003	21:30	4.9	78.3	10.96	101.4	29.93	6.3
11/14/2003	21:45	5.3	71.2	10.96	101.5	29.93	6.4
11/14/2003	22:00	4.2	74.8	10.96	101.1	29.93	11.1
11/14/2003	22:15	4.4	102.5	10.96	100.5	29.93	7.8
11/14/2003	22:30	3.1	85	10.9	100.2	29.93	18.1
11/14/2003	22:45	3	112.9	10.9	100.3	29.93	8.2
11/14/2003	23:00	1.3	309.8	10.79	100.6	29.93	73.3
11/14/2003	23:15	3.6	6.1	10.74	100.6	29.93	11.2
11/14/2003	23:30	4.8	39.5	10.57	100.9	29.92	3.9
11/14/2003	23:45	5.3	39.7	10.46	101	29.92	4.5
11/14/2003	0:00	4.9	46.5	10.41	100.7	29.91	6.8
11/15/2003	0:15	4.6	56	10.08	101.3	29.91	4.5
11/15/2003	0:30	3.7	40.9	10.02	101.7	29.92	9.1
11/15/2003	0:45	3.5	50.4	10.19	101.2	29.91	9.3
11/15/2003	1:00	2.6	61.6	10.02	100.7	29.91	10.4
11/15/2003	1:15	3.4	43.1	10.13	100.2	29.91	6.3
11/15/2003	1:30	3.7	39.8	10.02	98.8	29.91	9.4
11/15/2003	1:45	4.7	52.1	9.59	100.2	29.91	8.3
11/15/2003	2:00	4.6	59.2	9.15	101	29.91	6.3
11/15/2003	2:15	3.9	49.4	9.37	100.5	29.9	14.6
11/15/2003	2:30	3.7	37.9	9.97	98.9	29.9	9.3
11/15/2003	2:45	3	27.2	10.24	98.1	29.9	12.2
11/15/2003	3:00	2.2	36.6	10.35	97.5	29.9	12.9
11/15/2003	3:15	3.6	39.7	10.02	96.9	29.9	12.2
11/15/2003	3:30	5.1	63.1	8.38	100	29.89	8.9

Chloropicrin Application Monitorin - Period 4

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/15/2003	3:45	5.5	59	8.33	101.5	29.89	5.2
11/15/2003	4:00	4.9	66.1	8.27	102	29.89	7.5
11/15/2003	4:15	4.4	67	8.38	102.2	29.88	8
11/15/2003	4:30	4.2	66	8.38	102.2	29.88	4.4
11/15/2003	4:45	4.8	66	8.44	102.4	29.88	4.9
11/15/2003	5:00	4.2	73.5	8.55	102.4	29.88	8.8
11/15/2003	5:15	3.6	76.9	8.6	102.4	29.88	25.5
11/15/2003	5:30	4.1	84.9	8.88	102.6	29.88	9.7
11/15/2003	5:45	4.9	65.7	8.88	102.3	29.88	6.7
11/15/2003	6:00	5.2	56.2	8.77	102.3	29.87	10.3
11/15/2003	6:15	6	14.4	8.98	102.3	29.88	19.6
11/15/2003	6:30	3.6	64	9.48	101	29.88	13.9
11/15/2003	6:45	4	57.3	9.31	100.6	29.88	16.3
11/15/2003	7:00	4.2	61.6	9.42	100.4	29.89	11.8
11/15/2003	7:15	4.2	61.9	9.26	100.8	29.89	17
11/15/2003	7:30	4.4	78.8	9.26	101.4	29.89	7.5
11/15/2003	7:45	5.3	73.3	9.31	101.4	29.89	5.5
11/15/2003	8:00	5.1	74.9	9.37	101.5	29.89	5.7
11/15/2003	8:15	4.3	70.8	9.48	101.5	29.89	5.9
11/15/2003	8:30	3.4	58.9	9.7	100.8	29.9	11.7

Period 5
11/15/03 0730 - 1600

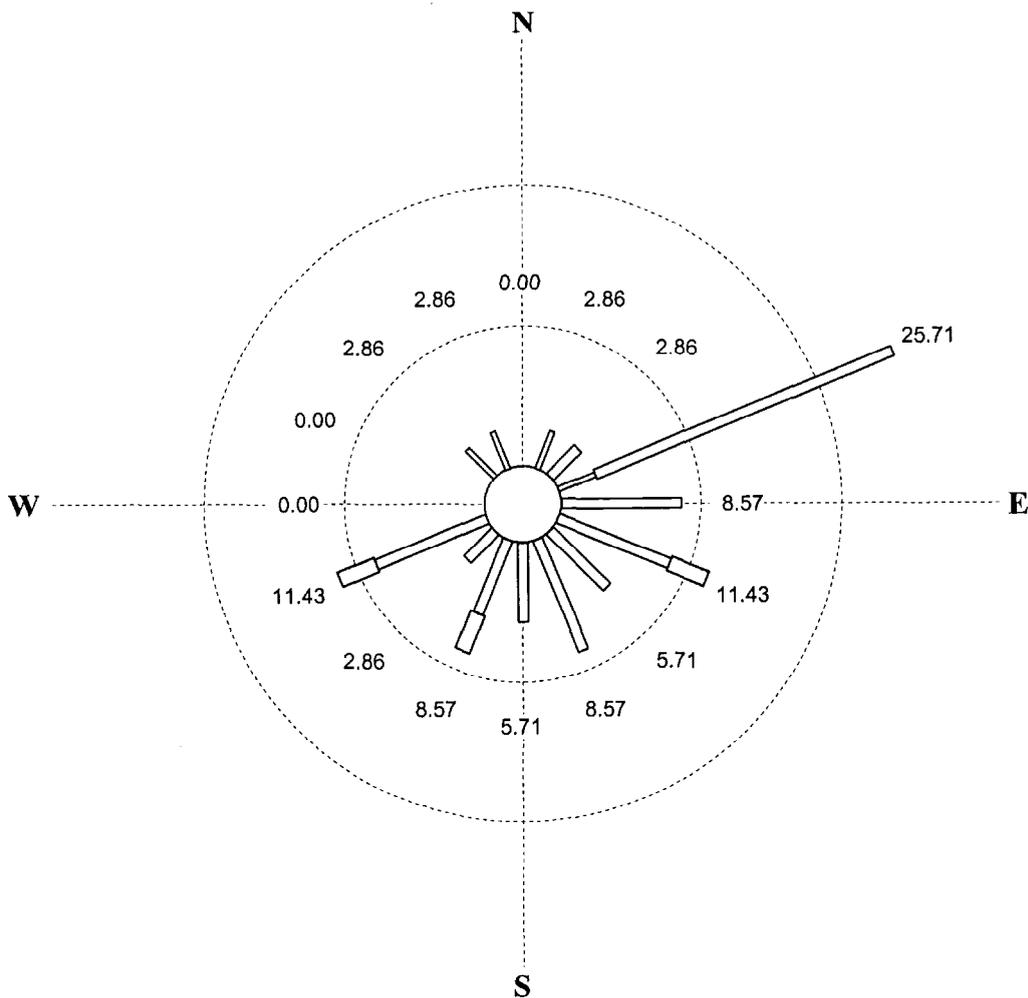

Wind Speed (Miles Per Hour)

Calms excluded.
 Rings drawn at 10% intervals.
 Wind flow is FROM the directions shown.
 No observations were missing.

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)

LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	0.00	0.00	0.00	0.00	0.00	0.00
NNE	2.86	0.00	0.00	0.00	0.00	0.00
NE	0.00	2.86	0.00	0.00	0.00	0.00
ENE	2.86	22.86	0.00	0.00	0.00	0.00
E	0.00	8.57	0.00	0.00	0.00	0.00
ESE	0.00	8.57	2.86	0.00	0.00	0.00
SE	0.00	5.71	0.00	0.00	0.00	0.00
SSE	0.00	8.57	0.00	0.00	0.00	0.00

TOTAL OBS = 40 MISSING OBS = 0

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)

LOWER BOUND OF CATEGORY



DIR	0.1	3.5	6.9	11.5	18.4	24.2
S	0.00	5.71	0.00	0.00	0.00	0.00
SSW	0.00	5.71	2.86	0.00	0.00	0.00
SW	0.00	2.86	0.00	0.00	0.00	0.00
WSW	0.00	8.57	2.86	0.00	0.00	0.00
W	0.00	0.00	0.00	0.00	0.00	0.00
WNW	0.00	0.00	0.00	0.00	0.00	0.00
NW	2.86	0.00	0.00	0.00	0.00	0.00
NNW	2.86	0.00	0.00	0.00	0.00	0.00

CALM OBS = 5

Chloropicrin Application Monitoring - Period 5

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/15/2003	7:30	4.4	78.8	9.26	101.4	29.89	7.5
11/15/2003	7:45	5.3	73.3	9.31	101.4	29.89	5.5
11/15/2003	8:00	5.1	74.9	9.37	101.5	29.89	5.7
11/15/2003	8:15	4.3	70.8	9.48	101.5	29.89	5.9
11/15/2003	8:30	3.4	58.9	9.7	100.8	29.9	11.7
11/15/2003	8:45	4.4	71.6	10.13	99.3	29.9	7.6
11/15/2003	9:00	4.9	58.4	10.19	98.8	29.9	7.6
11/15/2003	9:15	4.3	62.8	10.3	97.8	29.9	10
11/15/2003	9:30	4.8	69.3	10.46	97.3	29.91	12
11/15/2003	9:45	4.9	72.9	10.57	96.5	29.91	8.3
11/15/2003	10:00	4.3	43.2	10.63	96.9	29.92	22
11/15/2003	10:15	3.3	312	10.63	96.4	29.93	68.4
11/15/2003	10:30	2.3	328.7	10.57	96.7	29.93	63.4
11/15/2003	10:45	2.6	19.8	10.57	98	29.93	41.6
11/15/2003	11:00	5	123	10.46	97.7	29.92	9.1
11/15/2003	11:15	6.5	119.3	10.52	97.9	29.91	8.6
11/15/2003	11:30	7.2	107.6	10.63	96.7	29.9	8.3
11/15/2003	11:45	6.1	95	10.9	95.9	29.89	7.1
11/15/2003	12:00	5.9	97.8	11.17	93.9	29.89	7.7
11/15/2003	12:15	5	108.1	11.39	93.8	29.89	15.5
11/15/2003	12:30	4.5	141.5	11.56	92.3	29.89	23.4
11/15/2003	12:45	5.1	148.3	11.89	88.7	29.88	16
11/15/2003	13:00	5	146	12.27	84	29.88	15.5
11/15/2003	13:15	5.2	155.7	12.65	79.9	29.88	22.2
11/15/2003	13:30	5.4	158.8	12.82	79.9	29.89	25.5
11/15/2003	13:45	6.7	200.5	12.98	78.3	29.89	14.5
11/15/2003	14:00	6.8	187.2	12.82	80.6	29.88	15.5
11/15/2003	14:15	6.6	187.5	12.71	81.2	29.88	12.6
11/15/2003	14:30	7.2	198.2	12.76	81.1	29.88	11.9
11/15/2003	14:45	6.8	212.3	12.71	78.9	29.88	10.8
11/15/2003	15:00	5.6	220	12.6	77.3	29.87	10.4
11/15/2003	15:15	5.6	244.1	12.54	77	29.87	8.8
11/15/2003	15:30	6	247.7	12.6	79	29.87	9.8
11/15/2003	15:45	7.3	250.7	12.49	78.6	29.87	8.5
11/15/2003	16:00	6.1	254.4	12.43	79.2	29.87	9.2
11/15/2003	16:15	6.8	262.1	12.38	79.4	29.86	8.1
11/15/2003	16:30	5.2	265	12.32	81	29.86	7.3

Period 6
11/15/03 1600 - 11/16/03 0800

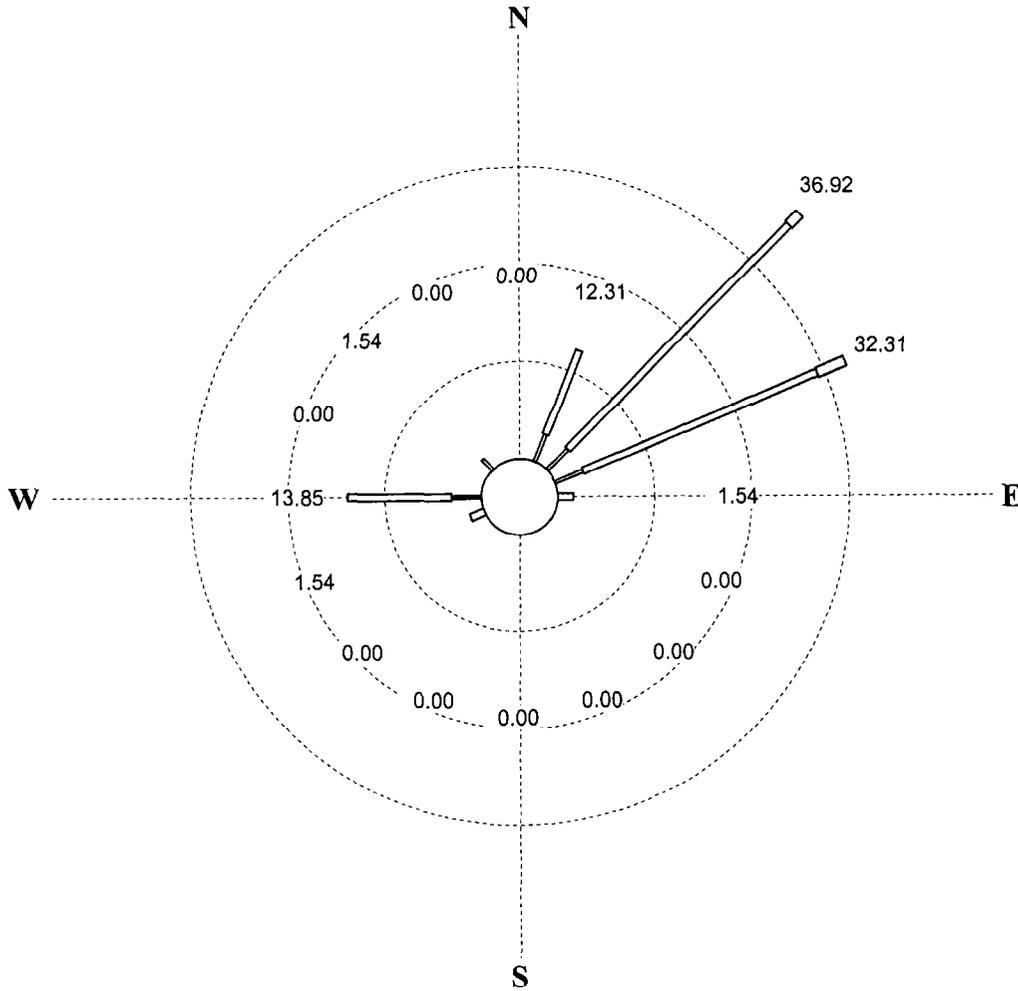

Wind Speed (Miles Per Hour)

Calms excluded.
 Rings drawn at 10% intervals.
 Wind flow is FROM the directions shown.
 No observations were missing.

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	0.00	0.00	0.00	0.00	0.00	0.00
NNE	3.08	9.23	0.00	0.00	0.00	0.00
NE	3.08	32.31	1.54	0.00	0.00	0.00
ENE	3.08	26.15	3.08	0.00	0.00	0.00
E	0.00	1.54	0.00	0.00	0.00	0.00
ESE	0.00	0.00	0.00	0.00	0.00	0.00
SE	0.00	0.00	0.00	0.00	0.00	0.00
SSE	0.00	0.00	0.00	0.00	0.00	0.00

TOTAL OBS = 70 MISSING OBS = 0

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)
 LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
S	0.00	0.00	0.00	0.00	0.00	0.00
SSW	0.00	0.00	0.00	0.00	0.00	0.00
SW	0.00	0.00	0.00	0.00	0.00	0.00
WSW	0.00	1.54	0.00	0.00	0.00	0.00
W	3.08	10.77	0.00	0.00	0.00	0.00
WNW	0.00	0.00	0.00	0.00	0.00	0.00
NW	1.54	0.00	0.00	0.00	0.00	0.00
NNW	0.00	0.00	0.00	0.00	0.00	0.00

CALM OBS = 5

Chloropicrin Application Monitoring - Period 6

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/15/2003	15:45	7.3	250.7	12.49	78.6	29.87	8.5
11/15/2003	16:00	6.1	254.4	12.43	79.2	29.87	9.2
11/15/2003	16:15	6.8	262.1	12.38	79.4	29.86	8.1
11/15/2003	16:30	5.2	265	12.32	81	29.86	7.3
11/15/2003	16:45	5.1	264.2	12.32	80.9	29.85	6.6
11/15/2003	17:00	5.2	262.4	12.27	81.4	29.85	6.7
11/15/2003	17:15	4.7	266	12.27	81.3	29.85	8.9
11/15/2003	17:30	4.5	262.6	12.21	81.8	29.85	5.9
11/15/2003	17:45	3.2	261.6	12.21	83.2	29.84	13.8
11/15/2003	18:00	3.6	272.2	12.16	82.7	29.84	7.3
11/15/2003	18:15	2.9	276.7	12.05	82.8	29.84	8.1
11/15/2003	18:30	2.7	316.9	11.83	84.5	29.84	44.3
11/15/2003	18:45	3.2	24.2	11.56	88	29.83	11.9
11/15/2003	19:00	3.4	17.5	11.34	89.7	29.83	13.4
11/15/2003	19:15	3.9	19.7	10.9	93	29.83	8.6
11/15/2003	19:30	4.9	36.1	10.68	94.7	29.83	6.4
11/15/2003	19:45	5.6	25	10.3	96.3	29.82	5.9
11/15/2003	20:00	4.7	30	10.13	95.9	29.82	10.1
11/15/2003	20:15	5.6	43.3	9.86	95.8	29.82	7
11/15/2003	20:30	5.8	30.1	9.97	93.8	29.82	6.8
11/15/2003	20:45	5.3	38.1	9.7	93.9	29.82	5.1
11/15/2003	21:00	5.8	49.9	8.93	96.7	29.82	5.6
11/15/2003	21:15	6.5	48.8	8.6	98.3	29.82	6.7
11/15/2003	21:30	6.1	42.7	8.77	96.4	29.82	4.9
11/15/2003	21:45	6.4	31.6	9.15	93.4	29.82	3.8
11/15/2003	22:00	5.4	48.6	9.09	92.2	29.81	17.1
11/15/2003	22:15	4.7	71.5	7.94	98.1	29.82	11.7
11/15/2003	22:30	4.1	76.7	8.11	97.8	29.81	7.6
11/15/2003	22:45	6.1	72.1	8.22	96.4	29.81	12.5
11/15/2003	23:00	5.8	45.8	8.16	95.8	29.8	7.1
11/15/2003	23:15	6.1	35	8.27	95.1	29.8	7.1
11/15/2003	23:30	6.1	31.5	8.82	93.6	29.8	7.8
11/15/2003	23:45	4	59.3	8.66	94.8	29.8	8.7
11/15/2003	0:00	4.3	60.4	8.44	94.8	29.8	4.7
11/16/2003	0:15	5.5	50.1	8.22	96.3	29.8	6.5
11/16/2003	0:30	5.3	43.2	8.66	94.3	29.8	5
11/16/2003	0:45	3.8	72.7	8.44	95.9	29.8	20.5
11/16/2003	1:00	2.7	74.6	8.27	97.2	29.8	6.7
11/16/2003	1:15	4	52.2	8.33	96.9	29.8	7.7
11/16/2003	1:30	5.6	55.8	8.22	97.6	29.8	4.7
11/16/2003	1:45	5.3	52	8.11	98.8	29.8	3.6
11/16/2003	2:00	5.6	57.9	8.05	99.5	29.79	4.3
11/16/2003	2:15	5.9	48.4	7.89	99.9	29.79	4.9
11/16/2003	2:30	6.4	46.1	7.94	98	29.79	3.8
11/16/2003	2:45	6.3	54.7	7.56	99.1	29.79	3.5
11/16/2003	3:00	6.2	50.1	7.51	99.2	29.8	7.1
11/16/2003	3:15	6.2	48.5	7.62	97.5	29.8	3.7
11/16/2003	3:30	5.5	53.3	7.45	98.3	29.8	3.6

Chloropicrin Application Monitoring - Period 6

Date	Time	WS (mph)	WD (Deg)	AT (C)	RH (%)	BP (inHg)	Sigma (Deg)
11/16/2003	3:45	4.9	74.6	7.34	98.8	29.79	11.6
11/16/2003	4:00	4.1	80.2	7.07	100.3	29.79	11.5
11/16/2003	4:15	3.4	55.2	6.96	100.7	29.8	6.5
11/16/2003	4:30	4.4	58.4	6.8	101.2	29.81	10.7
11/16/2003	4:45	3.2	54.8	7.01	100.6	29.82	8.6
11/16/2003	5:00	3.7	63	7.12	99.6	29.82	10
11/16/2003	5:15	3.5	76.7	7.01	99	29.82	6
11/16/2003	5:30	4.1	59.2	6.69	99.5	29.82	7.3
11/16/2003	5:45	4.9	58.4	6.47	100.3	29.82	7.5
11/16/2003	6:00	4.4	65.2	6.58	98.9	29.83	9.1
11/16/2003	6:15	4.7	67.9	6.41	98.8	29.83	3.6
11/16/2003	6:30	6	50.6	6.03	100.2	29.83	6.4
11/16/2003	6:45	7.5	45.9	5.92	100.3	29.83	5
11/16/2003	7:00	7.2	57.3	5.76	100.6	29.83	5.9
11/16/2003	7:15	7	60.6	5.59	101.3	29.82	4.1
11/16/2003	7:30	6.2	63.4	5.43	101.8	29.82	4.7
11/16/2003	7:45	5.1	64.3	5.54	102.2	29.82	4.8
11/16/2003	8:00	4.6	71.4	5.97	102.4	29.82	6
11/16/2003	8:15	None	None	None	None	None	None
11/16/2003	8:30	None	None	None	None	None	None

APPENDIX V
CHLOROPICRIN APPLICATION FIELD LOG SHEETS

CARTRIDGE FI. LOG SHEET

Project: Chloropicrin Field Application Air Monitoring
 Project #: P-03-1 On Flow: 100 ±2ccm Off Flow: 100 ccm ±10%

Log #	Sample Name	Sampler ID Number	Date On	Time On	Counter On	Flow On	True Flow	Comments	Weather	Initials
			Off	Off	Off	Off	Off		K,P,C,F&R	On
001	SE-C-B1	MN-1	11/12/03	0620	501.20	99	100	B1 = DAYLIGHT HOURS.	K	SRR
			11/12/03	1648	511.60	90	91		C	SRR
002	SE-C-B1-FS	MW-1	11/12/03	0620	227.00	99	100	FIELD SPIKE.	K	SRR
			11/12/03	1648	237.50	106	107		C	SRR
003	SW-C-B1	MB-1	11/12/03	0631	581.50	99	100		K	SRR
			11/12/03	1659	590.90	95	96		C	SRR
004	SW-C-B1-FS	MA-1	11/12/03	0631	490.50	99	100	FIELD SPIKE.	K	SRR
			11/12/03	1659	501.00	95	96		C	SRR
005	NW-C-B1	MK-1	11/12/03	0639	693.30	99	100		K	SRR
			11/12/03	1710	703.80	112	113		C	SRR
006	NW-C-B1-FS	MH-1	11/12/03	0639	544.20	99	100	FIELD SPIKE.	K	SRR
			11/12/03	1710	554.70	96	97		C	SRR
007	NE-C-B1	MI-1	11/12/03	0647	440.70	99	100		K	SRR
			11/12/03	1722	451.30	100	101		C	SRR
008	NE-C-B1-FS	MF-1	11/12/03	0647	697.90	99	100	FIELD SPIKE.	K	SRR
			11/12/03	1722	708.50	94	95		C	SRR
009	C-TS	NA	11/12/03	0853	NA	NA	#VALUE!	TRIP SPIKE	K	SRR
			NA	NA	NA	NA	#VALUE!		NA	NA
010	C-TB	NA	11/12/03	0854	NA	NA	#VALUE!	TRIP BLANK	K	SRR
			NA	NA	NA	NA	#VALUE!		NA	NA
011	SE-C-B2	MN-1	11/12/03	1652	511.60	99	100	B2 = NIGHT TIME HOURS.	C	SRR
			11/13/03	0553	524.60	98	99		K	SRR
012	SW-C-B2	MB-1	11/12/03	1702	590.90	99	100		C	SRR
			11/13/03	0611	604.10	106	107		K	SRR
013	NW-C-B2	MK-1	11/12/03	1714	703.80	99	100		C	SRR
			11/13/03	0624	716.90	128	129		K	SRR
014	NE-C-B2	MI-1	11/12/03	1726	451.30	99	100		C	SRR
			11/13/03	0634	464.50	108	109		K	SRR
015	EC-C-1	MV-1	11/13/03	0741	535.00	99	100		K	SRR
			11/13/03	1636	543.90	94	95		R	SRR
016	SE-C-1	MN-1	11/13/03	0724	524.60	99	100	APPLICATION STARTED AT 0720.	K	SRR
			11/13/03	1552	533.10	99	100		R	SRR
017	SC-C-1	MW-1	11/13/03	0727	237.40	99	100		K	SRR
			11/13/03	1600	246.10	97	98		R	SRR
018	SW-C-1	MB-1	11/13/03	0730	604.10	99	100		K	SRR
			11/13/03	1605	612.70	99	100		R	SRR

MFM Used #: 21036 Slope: 1.008 Intercept: 0.230

86

CARTRIDGE FILTER LOG SHEET

Project: Chloropicrin Field Application Air Monitoring
 Project #: P-03-1 On Flow: 100 ±2ccm Off Flow: 100 ccm ±10%

Log #	Sample Name	Sampler ID Number	Date On	Time On	Counter On	Flow On	True Flow	Comments	Weather	Initials
			Off	Off	Off	Off	Off		Off	K,P,C,F&R
019	WC-C-1	MA-1	11/13/03	0732	501.00	99	100		K	SRR
			11/13/03	1610	509.60	99	100		R	SRR
020	NW-C-1	MK-1	11/13/03	0734	716.90	99	100		K	SRR
			11/13/03	1615	725.60	98	99		R	SRR
021	NC-C-1	MH-1	11/13/03	0736	554.70	99	100		K	SRR
			11/13/03	1620	563.50	95	96		R	SRR
022	NE-C-1	MI-1	11/13/03	0738	464.50	99	100		K	SRR
			11/13/03	1629	473.30	100	101		R	SRR
023	NE-C-1C	MF-1	11/13/03	0738	708.50	99	100		K	SRR
			11/13/03	1626	717.30	95	96		R	SRR
024	SE-C-2	MN-1	11/13/03	1554	533.10	99	100		C	SRR
			11/14/03	0734	548.80	100	101		R	SRR
025	SC-C-2	MW-1	11/13/03	1601	246.10	99	100		C	SRR
			11/14/03	0741	261.70	99	100		R	SRR
026	SW-C-2	MB-1	11/13/03	1606	612.70	99	100		C	SRR
			11/14/03	0746	628.40	100	101		R	SRR
027	WC-C-2	MA-1	11/13/03	1611	509.60	99	100		C	SRR
			11/14/03	0750	525.30	99	100		R	SRR
028	NW-C-2	MK-1	11/13/03	1616	725.60	99	100		C	SRR
			11/14/03	0756	741.30	96	97		R	SRR
029	NC-C-2	MH-1	11/13/03	1621	563.50	99	100		C	SRR
			11/14/03	0801	579.10	96	97		R	SRR
030	NE-C-2	MI-1	11/13/03	1630	473.30	99	100		C	SRR
			11/14/03	0809	488.90	105	106		R	SRR
031	NE-C-2C	MF-1	11/13/03	1630	717.30	99	100		C	SRR
			11/14/03	0807	732.90	99	100		R	SRR
032	E-C-2	MV-1	11/13/03	1637	543.90	99	100		C	SRR
			11/14/03	0813	559.50	100	101		R	SRR
033	SE-C-3	MN-1	11/14/03	0735	548.80	99	100	Rain started @ 1530	C	SRR
			11/14/03	1555	557.10	98	99		R	SRR
034	SC-C-3	MW-1	11/14/03	0742	261.70	99	100		C	SRR
			11/14/03	1602	270.00	97	98		R	SRR
035	SW-C-3	MB-1	11/14/03	0746	628.40	99	100		C	SRR
			11/14/03	1608	636.70	96	97		R	SRR
036	WC-C-3	MA-1	11/14/03	0751	525.30	99	100		C	SRR
			11/14/03	1617	533.70	?	#VALUE!	Rain shorted out MFM on recovery.	R	SRR

MFM Used #: 21036 Slope: 1.008 Intercept: 0.230

CARTRIDGE FI. LOG SHEET

Project: Chloropicrin Field Application Air Monitoring

Project #: P-03-1 On Flow: 100 ±2ccm Off Flow: 100 ccm ±10%

Log #	Sample Name	Sampler ID Number	Date On Off	Time On Off	Counter On Off	Flow On Off	True Flow	Comments	Weather		Initials
									K,P,C,F&R On	off	On Off
037	NW-C-3	MK-1	11/14/03	0757	741.30	99	100		C		SRR
			11/14/03	1623	749.70	?	#VALUE!		R		SRR
038	NC-C-3	MH-1	11/14/03	0802	579.10	99	100		C		SRR
			11/14/03	1631	587.60	?	#VALUE!		R		SRR
039	NE-C-3	MI-1	11/14/03	0809	488.90	99	100		C		SRR
			11/14/03	1638	497.40	?	#VALUE!		R		SRR
040	NE-C-3C	MF-1	11/14/03	0808	732.90	99	100		C		SRR
			11/14/03	1632	741.00	?	#VALUE!		R		SRR
041	E-C-3	MV-1	11/14/03	0815	559.50	99	100		C		SRR
			11/14/03	1644	568.10	?	#VALUE!		R		SRR
042	SE-C-4	MN-1	11/14/03	1556	557.10	99	100		R		SRR
			11/15/03	0732	572.70	99	100		C		SRR
043	SC-C-4	MW-1	11/14/03	1603	270.00	99	100	Water ingested.	R		SRR
			11/15/03	0738	285.60	20	20		C		SRR
044	SW-C-4	MB-1	11/14/03	1609	636.70	99	100	Water ingested.	R		SRR
			11/15/03	0745	652.30	32	32		C		SRR
045	WC-C-4	MA-1	11/14/03	1618	533.70	?	#VALUE!	Rain shorted out MFM.	R		SRR
			11/15/03	0749	549.20	33	33	Water ingested.	C		SRR
046	NW-C-4	MK-1	11/14/03	1625	749.70	?	#VALUE!	Spraying furrows with herbicide today.	R		SRR
			11/15/03	0755	765.20	98	99		C		SRR
047	NC-C-4	MH-1	11/14/03	1632	587.60	?	#VALUE!		R		SRR
			11/15/03	0800	603.10	89	90		C		SRR
048	NE-C-4	MI-1	11/14/03	1636	497.40	?	#VALUE!		R		SRR
			11/15/03	0810	514.90	98	99		C		SRR
049	NE-C-4C	MF-1	11/14/03	1637	741.00	?	#VALUE!		R		SRR
			11/15/03	0807	756.80	100	101		C		SRR
050	E-C-4	MV-1	11/14/03	1645	557.10	?	#VALUE!		R		SRR
			11/15/03	0816	583.50	99	100		C		SRR
051	SE-C-5	MN-1	11/15/03	0733	572.70	99	100		C		SRR
			11/15/03	1548	580.90	105	106		C		SRR
052	SC-C-5	MW-1	11/15/03	0739	285.60	99	100		C		SRR
			11/15/03	1554	293.80	0	0	gested water. Rigged hood to keep water out.	C		SRR
053	SW-C-5	MB-1	11/15/03	0746	652.30	99	100		C		SRR
			11/15/03	1600	660.50	98	99		C		SRR
054	WC-C-5	MA-1	11/15/03	0750	549.20	99	100		C		SRR
			11/15/03	1607	557.40	105	106		C		SRR

MFM Used #: 21036 Slope: 1.008 Intercept: 0.230

CARTRIDGE FI. LOG SHEET

Project: Chloropicrin Field Application Air Monitoring
 Project #: P-03-1 On Flow: 100 ±2ccm Off Flow: 100 ccm ±10%

Log #	Sample Name	Sampler ID Number	Date On	Time On	Counter On	Flow On	True Flow	Comments	Weather	Initials
			Off	Off	Off	Off	Off		Off	K,P,C,F&R On / off
055	NW-C-5	MK-1	11/15/03	0756	765.20	99	100		C	SRR
			11/15/03	1611	773.50	104	105		C	SRR
056	NC-C-5	MH-1	11/15/03	0801	603.10	99	100		C	SRR
			11/15/03	1616	611.30	104	105		C	SRR
057	NE-C-5	MI-1	11/15/03	0811	514.90	99	100		C	SRR
			11/15/03	1624	521.10	102	103		C	SRR
058	NE-C-5C	MF-1	11/15/03	0808	756.80	99	100		C	SRR
			11/15/03	1622	765.00	104	105		C	SRR
059	E-C-5	MV-1	11/15/03	0817	583.50	99	100		C	SRR
			11/15/03	1628	591.70	103	104		C	SRR
060	SE-C-6	MN-1	11/15/03	1549	580.90	99	100		C	SRR
			11/16/03	0731	596.60	103	104		K	SRR
061	SC-C-6	MW-1	11/15/03	1556	293.80	99	100		C	SRR
			11/16/03	0737	309.50	85	86		K	SRR
062	SW-C-6	MB-1	11/15/03	1601	660.50	99	100		C	SRR
			11/16/03	0742	676.20	103	104		K	SRR
063	WC-C-6	MA-1	11/15/03	1608	557.40	99	100		C	SRR
			11/16/03	0746	573.10	103	104		K	SRR
064	NW-C-6	MK-1	11/15/03	1612	773.50	99	100		C	SRR
			11/16/03	0751	789.20	97	98		K	SRR
065	NC-C-6	MH-1	11/15/03	1617	611.30	99	100		C	SRR
			11/16/03	0755	626.90	99	100		K	SRR
066	NE-C-6	MI-1	11/15/03	1625	521.10	99	100		C	SRR
			11/16/03	0801	536.80	103	104		K	SRR
067	NE-C-6C	MF-1	11/15/03	1623	765.00	99	100		C	SRR
			11/16/03	0800	780.70	102	103		K	SRR
068	E-C-6	MV-1	11/15/03	1629	591.70	99	100		C	SRR
			11/16/03	0806	607.30	102	103		K	SRR

MFM Used #: 21036
4 of 4

Slope: 1.008

Intercept: 0.230

Weather Codes: K = Clear, P = Partly Cloudy, C = ≥67% Cloudy, F = Fog, and R = Rain (any)

101

APPENDIX VI
METHOD VALIDATION DATA



Winston H. Hickox
Agency Secretary

Air Resources Board

Alan C. Lloyd, Ph.D.
Chairman

1001 I Street • P.O. Box 2815 • Sacramento, California 95812 • www.arb.ca.gov



Gray Davis
Governor

MEMORANDUM

TO: Kevin Mongar
Operations Planning and Assessment Section

FROM: Russell Grace, Manager
Special Analysis Section

DATE: July 30, 2001

SUBJECT: METHOD VALIDATION DATA

The Special Analysis Section provides laboratory support for the pesticide air monitoring program implemented by the ARB at the request of the Department of Pesticide Regulation. One of the responsibilities of the SAS is laboratory analytical method development. By way of this memo, we are providing you with the method validation data generated in the development of analytical methods for 1,3-dichloropropene (DCP or Telone), methyl isothiocyanate (MITC), methyl isocyanate (MIC), and trichloronitromethane (TCNM) for the 2001 monitoring season. The attached tables contain the currently available data generated to determine the method detection limits (MDLs), estimated quantitation limits (EQLs), reproducibility, recovery, and sample stability.

All of the available method validation findings were summarized in the standard operating procedures (SOPs) for each of the target analytes. These SOPs were previously provided to you.

If you have any questions, please contact Terry Houston at 322-2365 or me at 322-0223.

Enclosures
cc: Jeff Cook
Michael Poore
Terry Houston

The energy challenge facing California is real. Every Californian needs to take immediate action to reduce energy consumption. For a list of simple ways you can reduce demand and cut your energy costs, see our Website: <http://www.arb.ca.gov>.

California Environmental Protection Agency

1,3-DICHLOROPROPENE (DCP OR TELONE)

METHOD DETECTION LIMIT

Column is Restek Rtx 200, 60 m x 320 u 1.5 u film	c-DCP (ng/ml)		t-DCP (ng/ml)	
	01/23/01	01/24/01	01/23/01	01/24/01
	5.13	6.12	4.90	5.91
	5.28	6.27	4.79	5.96
	5.26	6.01	4.82	5.87
	5.13	5.86	4.61	5.68
	5.04	5.92	4.87	5.8
	4.86	5.82	4.36	5.58
	5.00	5.65	4.51	5.72
Average	5.10	5.95	4.69	5.79
Standard Deviation	0.15	0.20	0.20	0.14
MDL c-DCP/t-DCP	0.63 ng/ml			
EQL (5xMDL) X3ml	3.15 ng/ml 9.45 ng/sample			

DCP Standard is 48% cis and 49% trans isomers.

INSTRUMENT REPRODUCIBILITY

Amount (ng/ml)	Area response	ng/ml	Area response	ng/ml
10 (4.8/4.9)	684	4.72	628	4.74
	672	4.62	629	4.75
	681	4.69	681	5.17
	680	4.68	692	5.26
	684	4.72	669	5.08
Average	680	4.69	660	5.00
Standard Dev.	4.9	0.04	29.7	0.24
Coeff. Of Variation	0.7%	0.8%	4.5%	4.8%
40 (19.2/19.6)	2584	19.06	2472	19.69
	2599	19.18	2431	19.36
	2535	18.69	2394	19.06
	2530	18.66	2396	19.08
	2528	18.64	2405	19.15
Average	2555	18.85	2420	19.27
Standard Dev.	33.7	0.25	32.8	0.26
Coeff. Of Variation	1.3%	1.3%	1.3%	1.3%
100 (48.0/49.0)	6559	49.08	6282	50.58
	6581	49.25	6217	50.05
	6582	49.26	6292	50.66
	6604	49.42	6294	50.68
	6558	48.72	6284	49.77
Average	6577	49.15	6274	50.5
Standard Dev.	19.1	0.27	32.2	0.41
Coeff. Of Variation	0.3%	0.5%	0.5%	0.8%

METHYL ISOTHIOCYANATE (MITC)

METHOD DETECTION LIMIT

Column is Restek Rtx 200, 60 m x 320 u 1.5 u film	23 January 2001 $\mu\text{g/ml}$	24 January 2001 $\mu\text{g/ml}$
	1.35	0.55
	1.34	0.55
	1.32	0.54
	1.33	0.53
	1.34	0.53
	1.33	0.51
	1.31	0.52
Average	1.33	0.53
Standard deviation	0.01	0.01
MDL	0.03 ug/ml	
EQL (5xMDL) X3ml	0.17 ug/ml 0.51 ug/sample	

INSTRUMENT REPRODUCIBILITY

Amount ($\mu\text{g/ml}$)	area response	$\mu\text{g/ml}$
0.5 $\mu\text{g/ml}$	241768	0.57
	236231	0.56
	237966	0.56
	236467	0.56
	232177	0.55
	Average	236922
Standard Dev.	3456	0.007
Coeff. of Variation	1.3%	1.5%
2.0 $\mu\text{g/ml}$	899037	2.12
	893388	2.10
	883264	2.08
	887269	2.09
	865564	2.04
	Average	885762
Standard Dev.	12641	0.030
Coeff. of Variation	1.4%	1.4%
5.0 $\mu\text{g/ml}$	2216399	5.22
	2210700	5.20
	2202629	5.18
	2205529	5.19
	2200708	5.18
	Average	2207193
Standard Dev.	6378	0.017
Coeff. of Variation	0.3%	0.3%

METHYL ISOCYANATE (MIC)

METHOD DETECTION LIMIT

18 May 2001	ug/ml
	0.005
	0.005
	0.004
	0.003
	0.004
	0.003
	0.005
Average	0.004
Stdev	0.001
MDL= 3.14 * stdev	0.003 ug/ml
EQL= 5 x MDL	0.015 ug/ml
x 3 ml	0.42 ug/sample

INSTRUMENT REPRODUCIBILITY

Amount ($\mu\text{g/ml}$)	$\mu\text{g/mL}$	area response
0.013 $\mu\text{g/mL}$	0.013	1.838
	0.012	1.867
	0.012	1.879
	0.012	1.854
	0.012	1.913
	Average	0.012
Standard Deviation	0.0	0.028
0.078 $\mu\text{g/mL}$	0.075	11.912
	0.075	11.827
	0.075	11.882
	0.076	11.967
	0.075	11.866
	Average	0.075
Standard Deviation	0.0	0.052
0.260 $\mu\text{g/mL}$	0.261	41.254
	0.255	40.253
	0.256	40.455
	0.257	40.603
	0.278	43.821
	Average	0.261
Standard Deviation	0.010	1.471

METHYL ISOCYANATE (MIC) cont.

EXTRACTION STUDIES

	Spiked Amount (ug/ml)	Recovery (ug/ml)	
2-PP+MIC	0.2	0.157	
		0.210	
		0.205	
		0.169	
	1.0	0.922	
		0.850	
XAD7+CAN+MIC	0.2	0.200	
		0.133	
	1.0	0.095	
		0.921	
		0.701	
		0.598	
XAD7 Spikes (in vial)	0.1	0.057	
		0.066	
	0.2	0.141	
		0.134	
		0.135	
		0.129	
	1.0	0.647	
		0.645	
		0.554	
		0.568	
	1.5	1.49	
		1.42	
	Field Spikes	0.015	0.003
			0.003
0.003			
0.1		0.028	
		0.058	
0.2		0.119	
		0.072	
		0.105	
		0.099	
1.0		0.475	
		0.470	
		0.516	
		0.501	
1.5		1.29	
		0.8	

TRICHLORONITROMETHANE (TCNM or CHLOROPICRIN)

METHOD DETECTION LIMIT

16 April 2001	ng/ml
	5.25
	5.92
	5.25
	5.59
	6.14
	6.19
	5.28
Average	5.66
Standard Deviation	0.42
MDL= 3.14 * stdev	1.32 ng/ml
EQL= 5 x MDL	6.6 ng/ml
x 3 ml	19.8 ng/sample

INSTRUMENT REPRODUCIBILITY

	ng/ml	area response
5 ng/ml	5.59	184
	5.56	183
	5.35	176
	5.51	165
	5.38	160
	5.43	162
	5.07	148
	Average	5.41
Standard Deviation	0.18	13
20 ng/ml	20.9	764
	20.9	763
	19.4	706
	19.3	700
	19.8	720
	20.2	736
	19.9	724
	Average	20.0
Standard Deviation	0.7	25
50 ng/ml	51.9	1970
	50.2	1903
	52.5	1994
	51.8	1967
	49.7	1885
	50.4	1913
	48.8	1848
	Average	50.8
Standard Deviation	1.4	53

TRICHLORONITROMETHANE (TCNM or CHLOROPICRIN) cont.

BREAKTHROUGH ANALYSIS

Flows	Average Primary Bed (ng/ml)	% Primary Recovery/ Standard Dev	Average Secondary Bed (ng/ml)	% Secondary Recovery/ Standard Dev
1.0 LPM	186.8 (n=8)	37.4 3.8	81.8	16.4 2.4
0.5 LPM	111.8 (n=2)	22.4 1.7	89.9	18.0 0.9
0.2 LPM	362.6 (n=3)	72.5 1.9	36.9	7.4 1.3
0.1 LPM	408.4 (n=6)	81.7 3.8	<MDL	<MDL

Field Samples spiked at 500 ng/ml.

STORAGE STABILITY ANALYSIS

Date	Days	XAD Blank	L#1	L#2	L#3	H#1	H#2	H#3
4/4/01	0	<MDL	4.91	5.43	5.2	43.12	43.62	43.31
4/13/01	9	<MDL	6.2	6.06	5.94	43.12	49.34	43.65
4/18/01	14	<MDL	6.71	6.5	6.14	54.38	52.4	54.07
4/24/01	20	<MDL	5.18	6.01	4.57	40.72	41.97	39.12
5/2/01	28	<MDL	5.42	4.26	4.07	43.19	42.66	42.11
Average			5.68	5.65	5.18	44.91	46.00	44.45
Stdev			0.75	0.87	0.88	5.40	4.61	5.66
% Recovery			113.68	113.04	103.68	89.812	91.996	88.904

APPENDIX VII

STANDARD OPERATION PROCEDURE
FOR SAMPLING AND ANALYSIS OF TRICHLORONITRIMETHANE (CHLOROPICRIN)
IN APPLICATION AND AMBIENT AIR USING
GAS CHROMATOGRAPHY/MASS SELECTIVE DETECTOR

**Standard Operating Procedure for
Sampling and Analysis of Trichloronitromethane
(Chloropicrin) in Application and Ambient Air using Gas
Chromatography/Mass Selective Detector**

**Special Analysis Section
Northern Laboratory Branch
Monitoring and Laboratory Division**

**Revision 1
10/29/02**

Approved by:

**Russell Grace, Manager
Special Analysis Section**

DISCLAIMER: Mention of any trade name or commercial product in this Standard Operating Procedure does not constitute endorsement or recommendation of this product by the Air Resources Board. Specific brand names and instrument descriptions listed in the Standard Operating Procedures are equipment used by the ARB laboratory. Any functionally equivalent instrumentation can be used.

1. SCOPE

The current method is for the analysis of trichloronitromethane (TCNM) using a gas chromatograph/mass selective detector. The procedure is for the analysis of application and ambient air monitoring of TCNM using XAD-4 resin tubes. The Department of Pesticide Regulation (DPR) asked the Air Resources Board (ARB) to analyze for TCNM during agricultural/structural application with a requested quantitation limit of 1.0 $\mu\text{g}/\text{m}^3$ and ambient monitoring with a quantitation limit of 0.1 $\mu\text{g}/\text{m}^3$.

2. SUMMARY OF METHOD

Resin tubes, XAD-4, are placed on the sampler for 24 hours at a flowrate of 0.1 liters per minute (LPM or 100 mLPM). The samples are stored in an ice chest or refrigerator until extracted with 3.0 ml of dichloromethane (DCM). A gas chromatograph with a mass selective detector in the selected ion monitoring (SIM) mode is used for analysis.

3. INTERFERENCES/LIMITATIONS

Interferences may be caused by contaminants in solvents, reagents, glassware and other processing apparatus that can lead to discrete artifacts or elevated baselines. A method blank, including both solvent and resin, must be analyzed with each batch of samples to detect any possible interferences.

4. EQUIPMENT AND CONDITIONS

A. INSTRUMENTATION:

Hewlett-Packard 6890 Series gas chromatograph
Hewlett-Packard 5973 Network mass selective detector
Hewlett-Packard 6890 Enhanced Parameters ALS

MS Transfer line: 280°C

Injector: 210°C, Splitless, Liner 4 mm straight liner with glass wool

Column: Restek Rtx-200, 60 meter, 320 μm i.d., 1.5 μm film thickness, or equivalent

GC Temperature Program: Oven initial 40°C, hold 4 min. Ramp to 220°C @ 12°C/min., hold 1 min., ramp to 240°C @ 20°C/min., hold 2.0 min.

Retention time: TCNM 11.93 min.

Splitter open @ 1.0 min.

Flows: Column: He, 1.6 ml/min, 9.1 psi. (velocity: 32cm/sec)

Splitter: 50 ml/min.

Mass Spectrometer: Electron Ionization
Selective Ion Monitoring: trichloronitromethane: 117 (quant. ion 100%), 119 (qual. ion 98%); Tuning: PFTBA on masses 69, 219, 502

B. Auxiliary Apparatus

1. Precleaned vials, 8 ml capacity with teflon caps
2. Whatman filters, 0.45 μm
3. Disposable syringes, 3 ml
4. Sonicator
5. GC vials with septum caps

C. Reagents

1. Dichloromethane, Pesticide grade or better
2. Trichloronitromethane, Chem Service PS-4, 98.8%
3. XAD-4 resin sorbent tubes, 400/200mg, SKC, Fullerton, CA

5. ANALYSIS OF SAMPLES

1. A daily manual tune shall be performed using PFTBA. The instrument is tuned using masses: 69, 219, 502. The criterion for the tune are the peak widths at $\frac{1}{2}$ the peak height, 0.60 ± 0.05 , and the criteria for relative abundance: 69:100%, 219:90-120%, and 502: 5-12%.
2. It is necessary to analyze a solvent blank with each batch of samples. The blank must be free of interferences. A solvent blank must be analyzed after any sample that may result in possible carry-over contamination.
3. A five-point calibration curve shall be analyzed with each batch of samples. For the ambient studies the calibration will be 5.0-50.0 ng/mL and for the application studies 50.0-500 ng/mL.
4. A calibration check sample (7.5 ng/ml for ambient, and 75 ng/ml for application) is run after the calibration, after every ten samples and at the end of the sample batch. The value of the calibration check must be within $\pm 3\sigma$ (the standard deviation) or $\pm 10\%$ of the expected value whichever is greater. If the calibration check is outside this limit, then those samples in the batch after the last calibration check that was within limits need to be reanalyzed.
5. With each batch of samples analyzed, a laboratory blank and a laboratory control spike will be run concurrently. A laboratory blank is XAD-4 extracted and analyzed the same way as the samples. A laboratory control spike is XAD-4 spiked with a known amount of standard. The laboratory control

sample is extracted and analyzed the same way as the samples. Laboratory control samples should have recoveries that are greater than or equal to 70% of the theoretical spiked value.

6. Score and snap the sample resin tube, transfer the front bed of the resin tube into an 8-ml vial. (Save the back-up bed for future analysis if necessary.) Rinse the tube with 3.0 ml of DCM into the extraction vial. Cap and place the vial in the sonicator for one hour.
7. Filter the samples using 0.45 μm filter attached to a 3-ml syringe directly into a GC vial and cap securely.
8. The atmospheric concentration is calculated according to:

$$\text{Conc (ng/m}^3\text{)} = \text{Extract Conc (ng/ml)} \times 3 \text{ ml} / \text{Air Volume Sampled (m}^3\text{)}$$

6. **QUALITY ASSURANCE**

A. Instrument Reproducibility

The reproducibility of the instrument and analytical method was established by analyzing five (5) 1.0 μl injections of trichloronitromethane standard at three concentrations (low, mid, and high). The low, mid and high concentrations were 5, 20 and 50 ng/ml, respectively.

B. Calibration

A five-point calibration curve is made ranging from 5.0 ng/ml to 50.0 ng/ml for ambient monitoring and 50 ng/ml to 500 ng/ml for application monitoring.

C. Calibration Check

A calibration check sample is run after the calibration, after every ten samples and at the end of the sample batch to verify the system is in calibration. The value of the check must be within $\pm 3\sigma$ (the standard deviation) or $\pm 10\%$ of the expected value whichever is greater. If the calibration check is outside the limit, then those samples in the batch after the last calibration check that was within the limit need to be reanalyzed.

D. Minimum Detection Limit

The detection limit is based on US EPA MDL calculation. Using the analysis of seven (7) replicates of a low-level matrix spike, the method detection limit (MDL) and the estimated quantitation limit (EQL) for trichloronitromethane is calculated

by: $MDL = 3.14 * (\text{std dev values})$, where std dev = the standard deviation of the concentration calculated for the seven replicate spikes. For TCNM the MDL is 3.96 ng/sample (1.32 ng/mL). EQL, defined as $5 * MDL$, is 19.8 ng/sample (6.60 ng/mL) based on a 3.0 ml extraction volume. Results are reported to three significant figures. Results below EQL but above the MDL are reported as DET (detected) and results less than the MDL are reported as ND (nondetect) or <MDL.

E. Collection and Extraction Efficiency (Recovery)

Trichloronitromethane at a low and high level are spiked on XAD-4 tubes (three at each concentration). The spiked tubes are placed on field samplers with airflows of 100 mLpm for 24 hours. The samples are extracted with DCM and prepared as described in section 5, #6-7. The average percent recovery of trichloronitromethane should be $\pm 20\%$ of the expected value. The recoveries both for the low and high levels are greater than 80.0%.

F. Storage Stability

Storage stability was set up for a four-week study. Three (3) XAD-4 tubes each were spiked at the low and high-end concentrations. The tubes were stored in the freezer until analyzed. At the low-end concentrations (5 ng/ml), the recovery for the three spikes averaged 106.8 percent, ranging from 103.68 to 113.68 percent. The average percent recovery peaked after fourteen days and was at the lowest after 28 days. At the high end (50 ng/ml), the recovery for the three spikes averaged 90.24 percent, ranging from 88.90 to 92.00 percent. The average percent recovery peaked at fourteen days and was at the lowest at twenty days.

G. Breakthrough

The most recent study for ambient monitoring for 24 hours required a low sample flow rate to meet the requested EQL. A new breakthrough analysis study was conducted. The flow rates tested were 1.0, 0.5, 0.2 and 0.1 Lpm. To meet the EQL and minimize breakthrough possibility, the flow rate for the field sampling was set at 100 mLpm.

H. Safety

This procedure does not address all of the safety concerns associated with chemical analysis. It is the responsibility of the analyst to establish appropriate safety and health practices. For hazard information and guidance refer to the material safety data sheets (MSDS) of any chemicals used in this procedure.